
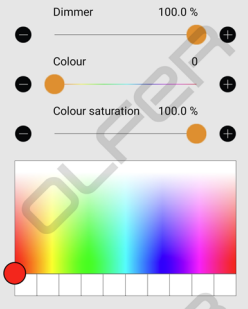

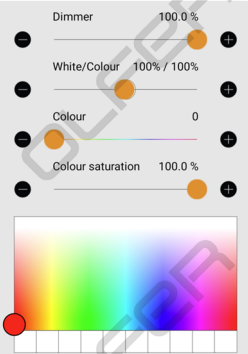














Type	Profile				Description	Manual App Control	
	Fixture ID	Model / Name	Icon	Fixture mode			
0-10V	23688	0-10V Linear		PWM/1ch/Dim{OHI,H WTemp,Daylight}	0-10V output. Linear dimming curve. LOUT switches on when dimming level >0	Dimmer: 0-10V	
	23689	0-10V Linear + iRelay		PWM/1ch/Dim{OHI,H WTemp,Daylight}	0-10V output & Relay. Linear dimming curve. Independent toggle switch control for the internal relay that switches the Live output (LOUT).	Dimmer: 0-10V LOUT: Internal relay live output	
DALI	21990***	DALI Lin* Broadcast		DALI/BC/Dim{OHI,H WTemp,Daylight}	DALI Broadcast. Linear dimming curve. DALI power-on level 0%.	Dimmer: BC	
	31899**	DALI Lin* BC (No LX sensor)		DALI/BC/Dim{OHI,H WTemp}	DALI Broadcast. Linear dimming curve. Internal Light sensor is disabled.	Dimmer: BC	
	33259	DALI Lin*BC+IRL(noLX)		DALI/BC/Dim{OHI,H WTemp}	DALI Broadcast. Linear dimming curve. Independent toggle switch control for the internal relay that switches the Live output (LOUT). Internal Light sensor is disabled.	Dimmer: BC LOUT	
	23692	DALI Lin* BC + iRelay		DALI/BC/Dim{OHI,H WTemp,Daylight}	DALI Broadcast & Relay. Linear dimming curve. Independent toggle switch control for the internal relay that switches the Live output (LOUT).	Dimmer: BC LOUT: Internal relay live output	
	23765	DALI Lin* BC +Ext.Sensors		DALI/BC/Dim{OHI,H WTemp,Presence,Daylight}	DALI Broadcast. Linear dimming curve. External DALI-2 motion and light sensor connected to the DALI bus will appear as a Casambi sensor in the App. The Internal light sensor of the node is disabled. LOUT switches on when dimming level >0.	Dimmer: BC	
	23768	DALI Lin* BC +Ext. Presence		DALI/BC/Dim{OHI,H WTemp,Presence,Daylight}	DALI Broadcast. Linear dimming curve. A compatible External DALI-2 motion sensor connected to the DALI bus will appear as a Casambi sensor in the App. LOUT switches on when dimming level >0.	Dimmer: BC	
	26738	DALI Log BC +Ext. Presence		DALI/BC/Dim{OHI,H WTemp,Presence,Daylight}	DALI Broadcast. Logarithmic dimming curve. A compatible External DALI-2 motion sensor connected to the DALI bus will appear as a Casambi sensor in the App. LOUT switches on when dimming level >0.	Dimmer: BC	
	23693	DALI Lin* (4xGroup)		DALI/4ch/Dim,Dim,Dim,Dim{OHI,H WTemp,Daylight}	DALI 4xGroup. Linear dimming curve. LOUT switches on when dimming level >0. Controls DALI groups.	Dimmer 1: G0 Dimmer 2: G1 Dimmer 3: G2 Dimmer 4: G3	
	23774	DALI Lin* DT6 TW Warm-Cool SA		DALI/2ch/Dim,Vertical{OHI,H WTemp,Daylight}	DALI DT6 Tunable white. Generic Warm-Cool slider (no CCT value data). Linear dimming curve. Automatic DALI addressing. LOUT switches on when dimming level >0. Warm: address A0 Cool: address A1	Dimmer: A0+A1 Colour temperature: Warm/cool mixer	
	23694	DALI Lin* DT6 TW 3-5K SA		DALI/2ch/Dim,TW{OHI,H WTemp,Daylight}	DALI DT6 Tunable white. Linear dimming curve. Automatic DALI addressing. LOUT switches on when dimming level >0. Warm: address A0 Cool: address A1	Dimmer: A0+A1 Colour temperature: Warm (3000K) / cool (5000K) mixer	


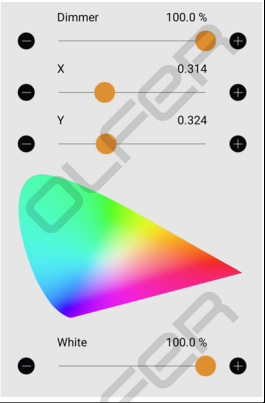




	23695	DALI Lin* DT6 RGB SA		DALI/3ch/Dim,RGB{OHI,HWTemp,Daylight}	DALI DT6 RGB. Linear dimming curve. Automatic DALI addressing. LOUT switches on when dimming level >0 Red: address A0 Green: address A1 Blue: address A2	<b>Dimmer:</b> Red/green/blue/dimming control <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10	
	23696	DALI Lin* DT6 RGB/W SA		DALI/4ch/Dim,RGB/White{OHI,HWTemp,Daylight}	DALI DT6 RGB/W. Linear dimming curve. White/Colour balance control. Automatic DALI addressing. LOUT switches on when dimming level >0 Red: address A0 Green: address A1 Blue: address A2 White: address A3	<b>Dimmer:</b> Red/green/blue/white dimming control <b>White/Colour:</b> Balance between the white channel and the RGB mix <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel) <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10	
	23699	DALI Lin* 2xDIM SA		DALI/Elements{OHI,HWTemp,Daylight}	DALI DT6 2xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. LOUT switches on when dimming level >0	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1	
	23769	DALI Lin* 2xDIM SA +Ext. Presence		DALI/Elements{OHI,HWTemp,Presence,Daylight}	DALI DT6 2xDimmers. Linear dimming curve. A compatible External DALI-2 motion sensor connected to the DALI bus will appear as a Casambi sensor in the App. Automatic DALI addressing. LOUT switches on when dimming level >0.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1	
	23700	DALI Lin* 3xDIM SA		DALI/Elements{OHI,HWTemp,Daylight}	DALI DT6 3xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. LOUT switches on when dimming level >0.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2	
	23701	DALI Lin* 4xDIM SA		DALI/Elements{OHI,HWTemp,Daylight}	DALI DT6 4xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. LOUT switches on when dimming level >0.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Dimmer 4:</b> A3	
	23702	DALI Lin* 5xDIM SA		DALI/Elements{OHI,HWTemp,Daylight}	DALI DT6 5xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. LOUT switches on when dimming level >0.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Dimmer 4:</b> A3 <b>Dimmer 5:</b> A4	



	23703	DALI Lin* 6xDIM SA		DALI/Elements{OHI,H WTemp,Daylight}	DALI DT6 6xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. LOU switches on when dimming level >0.	<p><b>Dimmer 1:</b> A0  <b>Dimmer 2:</b> A1  <b>Dimmer 3:</b> A2  <b>Dimmer 4:</b> A3  <b>Dimmer 5:</b> A4  <b>Dimmer 6:</b> A5</p>
	23704	DALI Lin* 7xDIM SA		DALI/Elements{OHI,H WTemp,Daylight}	DALI DT6 7xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. LOU switches on when dimming level >0.	<p><b>Dimmer 1:</b> A0  <b>Dimmer 2:</b> A1  <b>Dimmer 3:</b> A2  <b>Dimmer 4:</b> A3  <b>Dimmer 5:</b> A4  <b>Dimmer 6:</b> A5  <b>Dimmer 7:</b> A6</p>
	23705	DALI Lin* 8xDIM SA		DALI/Elements{OHI,H WTemp,Daylight}	DALI DT6 8xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. LOU switches on when dimming level >0.	<p><b>Dimmer 1:</b> A0  <b>Dimmer 2:</b> A1  <b>Dimmer 3:</b> A2  <b>Dimmer 4:</b> A3  <b>Dimmer 5:</b> A4  <b>Dimmer 6:</b> A5  <b>Dimmer 7:</b> A6  <b>Dimmer 8:</b> A7</p>
DALI DT8	23697	DALI Lin* DT8 TW 3-5K BC		DALI/DT8/Dim,TW{O HI,HWTemp,Daylight}	DALI DT8 Tunable white. Broadcast. Linear dimming curve. LOU switches on when dimming level >0.	<p><b>Dimmer:</b> BC  <b>Colour temperature:</b> warm (3000K) / cool (5000K) mixer</p>
	23698	DALI Lin* DT8 RGB/W BC		DALI/DT8/Dim,RGB/ White[Evolution]{OHI ,HWTemp,Daylight}	DALI DT8 RGB/W Broadcast. Linear dimming curve. White/Colour balance slider. LOU switches on when dimming level >0.	<p><b>Dimmer:</b> Red/green/blue/white dimming control  <b>White/Colour:</b> Balance between the white channel and the RGB mix  <b>Colour:</b> Red/green/blue mixer  <b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel)  <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)  <b>Saved colours:</b> Up to 10</p>



	23770	DALI Lin* DT8 XY/W BC		DALI/DT8/Dim,XY [Evolution]{OHL,HWT emp,Daylight}	DALI DT8 XY/W Broadcast. Linear dimming curve. Colour control by X,Y coordinates. LOUT switches on when dimming level >0.	<p><b>Dimmer:</b> BC  <b>X:</b> colour based on "x" coordinate  <b>Y:</b> colour based on "y" coordinate  <b>XY Palette:</b> Red/Green/Blue mix based on "x, y" coordinates  <b>White:</b> BC</p> 
Misc.	23690	RELAY		PWM/Elements{OHL, HWTemp,Daylight}	Relay fixture. Toggle switch for the internal relay that switches the Live output (LOUT).	<p><b>LOUT:</b> Internal relay live output</p> 

\*\* Default profile starting October 2023  
 \*\*\* Default profile until September 2023

**Additional Information**

Summary of some terms and abbreviations that have been used throughout the document.

Abbreviation:	Description:
A0, A1, A2, ...	DALI short address.
G0, G1, G2, ...	DALI group address.
BC	Broadcast.
SA	Short Address
Lin*	Optimized linear dimming curve.
Log	Logarithmic dimming curve.
LOUT	Internal relay live output



**Revision history**

Date:	Version:	Description:
25/09/2023	1.0	Initial release.
04/12/2023	1.1	Added fixture 33259 (DALI Lin*BC+iRL(noLX))

