



# CBU-2RL-2P

## Instructions manual

Read this manual before installation.  
Keep this manual for future reference.

**WARNING:** Risk of electrical shock, personal injury or death.

*This device may only be installed and put into operation by qualified personnel.*

*Check the information of the devices to be controlled to see if they are compatible.*

*This device is designed for use in lighting and industrial control.*

*Do not use this device in equipment where malfunction may cause severe personal injury or threaten human life.*

*Turn power off before installing the device.*

*Respect national and applicable installation regulations.*

*If damage or malfunction should occur during operation, immediately turn power off and send device to the factory for inspection. Do not open, modify or repair the device. The device does not contain serviceable parts.*

## Description

CBU-2RL-2P is a Casambi relay for controlling non-dimmable loads. CBU-2RL-2P device uses Bluetooth Low Energy communication to receive a command signal from the Casambi app and control the power supply to the connected loads through the internal relays according to the selected fixture profile.

CBU-2RL-2P has a two switched live outputs of up to 5A each and allows control of loads powered by AC or DC (24V) through its two different power supply modes.

There are several Casambi fixture profiles available for CBU-2RL-2P, which include different control modes: Toggle, Independent Toggle, Press, Pulse...

CBU-2RL-2P also integrates two independent push button inputs for controlling Casambi devices.

Configuration and control can be done from a mobile phone or tablet using the free CASAMBI APP (available for iOS and Android).

To access [all user guides and documents](https://www.olfer.com/olfer-cbu-2rl-2p.html), consult below link or scan QR code:

<https://www.olfer.com/olfer-cbu-2rl-2p.html>




## Technical data


<b>CBU-2RL-2P</b>		
Power supply mode		DC
Nominal input voltage		24 VDC
Input voltage range		21,6 ... 26,4 VDC
Input frequency		-
Input current		≤ 35 mA
Power consumption		≤ 0,95W
Standby power consumption		< 0,25W
Max. load	Incandescent or mains halogen lamps	5 A / output
	LED lamps and drivers	3,5 A / output
	High frequency fluorescent lamps	3,5 A / output
	Electronic or wire wound transformers	3,5 A / output
	Motors (cos φ > 0,4)	2 A / output
	Max. inrush current	40 A (4mS) / output
Control output		Two switched live outputs (normally open relays)
Push button input		2 x Normally open push button (N.O.)
RF	Communication interface	Bluetooth Low Energy (BLE) 4.0 / 5.0
	Communication protocol	Casambi
	Operating frequencies	2402–2483 MHz
	Max. transmission power	+7 dBm
Firmware update		OTA (Over The Air)
Protections		Line permanent over voltage (non-replaceable fuse), line surge over voltage, over temperature.
Operating temperature range		-20°C ... +50°C
Operating relative humidity range		0 ... 80% non-condensing
Connector		Screw terminals (Max. torque: 4 Lb.In / 0,5 Nm)
Wiring	Solid size	0,2 ... 3,3 mm <sup>2</sup> / 30 ... 12 AWG
	Stranded size	
	Wire strip length	6,5 mm
IP		IP20
Enclosure material		Plastic (UL94-V0)
Dimensions and weight		44 x 57 x 25 mm / 48gr
Single box		55 x 68 x 35 mm / 0,063 kg
Packing		160 units per box / 34 x 31,5 x 23 cm / 10,5kg
Standards		EN 60669-2-1:2022, EN 61000-3-2, EN 61000-3-3, EN 301489-1, EN 301489-17, EN 300328
Directives		(LVD) 2014/35/UE, (EMC) 2014/30/UE, (RED) 2014/53/UE, (RoHS) 2011/65/UE, (REACH) 1907/2006.

## Wiring diagram

- Control of AC-powered loads:

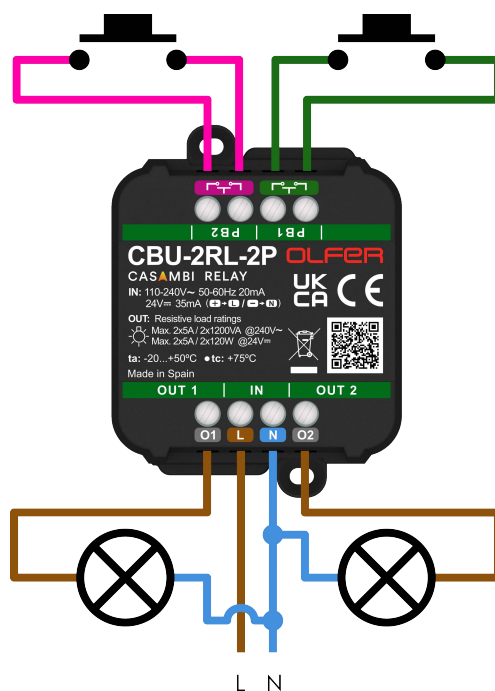

- Control of DC-powered loads (24V):

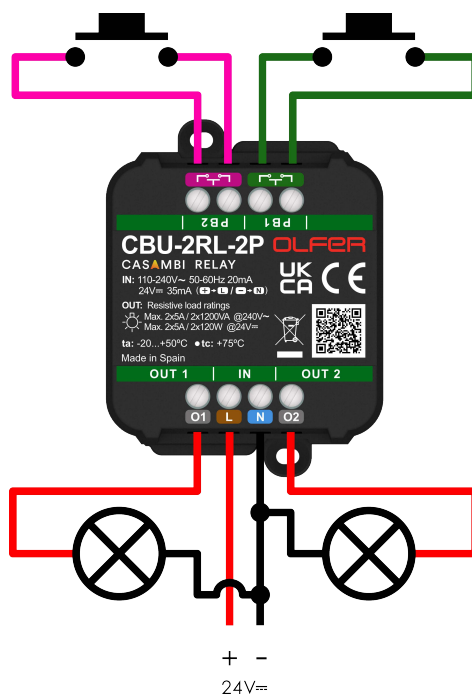

## Installation instructions



Make sure that the mains voltage is switched off when making any connections. Use 0,2 - 3,3 mm<sup>2</sup> solid or stranded conductor electrical wires. Strip the wire 6,5mm from the end.

Insert the wires to the corresponding holes and tighten the connector screw. Max. torque is 4 Lb.In / 0,5 Nm. Make sure to connect the input and outputs correctly.


The technical data table provides the maximum controllable current value according to the load type and the maximum inrush current value allowed by each device's output. Make sure that the current consumption and inrush current of the load connected to each output of the device do not exceed the specified values.

The internal relays will always switch the signal wired to the input terminal "**L**", to the output terminals "**O1**" and "**O2**". Therefore, in AC power supply mode, it will switch the mains phase, while in 24VDC power supply mode, it will switch the power positive. Make sure that the power supply mode used for the device (AC or DC) matches the one supported by the connected loads.

If 24 VDC power supply mode is used, ensure that the input power positive is connected to the "**L**" terminal and the input power negative to the "**N**" terminal. Incorrect connection of the power input could damage the device.

Push button inputs PB1 and PB2 are marked with the symbols "" and "". The recommended maximum wiring distance between the push button and terminals is 100 meters (in installations with strong electromagnetic interference, shielded cable may be required). Push-button inputs are designed exclusively for connecting a normally open push button. Make sure not to connect live parts to PB1 and PB2 terminals.

The two adjacent terminals of the PB1 and PB2 inputs are internally bridged in the device. If a double push button module with a common connection point (COM) is used, it should be connected to either of these two terminals following below diagram:

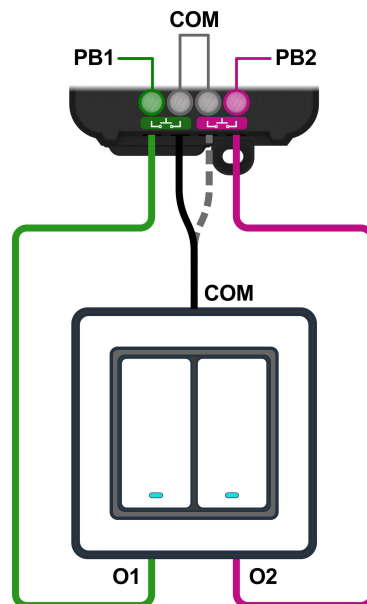

CBU-2RL-2P is a built-in device and it is intended to be integrated into a lighting fixture. Device protection against accidental contact of the active parts must be ensured by an additional enclosure (e.g. luminaire).

If you install CBU-2RL-2P into a heat sensitive environment (i.e inside a luminaire or in a ceiling outlet box above a luminaire), make sure that the ambient temperature does not exceed the specified maximum value. The device shouldn't be covered by insulators such as rock wool.

CBU-2RL-2P, as any other Casambi product, should not be placed in a metal enclosure or next to large metal structures. Metal will effectively block radio signals which are crucial to the operation of the product.

When the product is mounted inside a metal case (e.g. integrated into a metal light fixture), a cut-out around the antenna may be needed for allowing the RF signal to exit the structure. The cut-out area should be as large as possible. Also the device should be placed as far away from any vertical structures as possible.

Also mains wires should be placed as far as possible from the antenna area. CBU-2RL-2P's antenna is located on the right side of the device (below location marked in yellow):



Effective range is also highly dependent on the surrounding and obstacles, such as walls and building materials. It is strongly recommended to perform thorough connectivity testing on-site.

When CBU-2RL-2P is installed and powered, it can be configured and paired to a network using Casambi App. Unpaired devices will appear in nearby devices list of Casambi App. Select the most suitable fixture profile for the application before pairing CBU-2RL-2P to a network. The updated fixture profiles list is available at the [product webpage](#).

If the device is already paired to a network for which you don't have credentials and you wish to pair it to a new network, please go to "Nearby devices" -> Tap on device's icon -> Tap "Unpair device". Once the unpairing sequence has started, switch off the mains power supply and switch it on again within 1-2 seconds. If you do the procedure too quickly, the unpairing may not work properly. Repeat the unpairing sequence, allowing an extra 1 or 2 seconds to pass between the instant in which the mains power supply is switched off and on again. A second method to unpair the device is to connect a normally open push button to any of the push button inputs of the CBU-2RL-2P and during the unpairing procedure press the button.

ELECTRONICA OLFER, S.L.  
Av. Industria, 6-8. P.A.E. NEISA Avance I. 28108 Alcobendas SPAIN.

We reserve the right to make any changes without notice in the information reflected herein, not being liable for any harm that this may cause.