



IE_S-1W Series

FIXED INPUT ISOLATED & REGULATED

1W OUTPUT

DUAL OUTPUT

RoHS

multi-country patent protection

FEATURES

- Dual Output
- Small Footprint
- SIP Package Styles
- Industry Standard Pinout
- UL94-V0 Package
- No Heat Sink Required
- 3KVDC Isolation
- Power Density 0.85W/cm³
- Temperature Range: -40°C~+85°C
- No External Component Required
- RoHS Compliance

APPLICATIONS

The IE_S-1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 5\%$);
- 2) Where isolation is necessary between input and output (isolation voltage = 3000VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

These products don't apply to:

- 1) Where the input supply voltage varied (variation $\geq \pm 5\%$), otherwise our company's WRA series is recommended;
- 2) Where the isolation voltage between input and output is required to be >3000VDC, otherwise our company's IG_S(D)-1W Series of products are recommended;
- 3) When the actual output power is less than 0.25w, the IE_S-0.25W series are recommended.

MODEL SELECTION

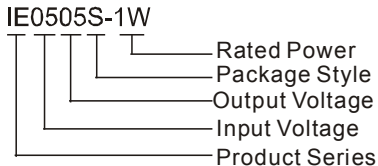

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)	Package Style
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
IE0505S-1W	5	4.75~5.25	±5	±100	±10	69	SIP
IE0509S-1W	5	4.75~5.25	±9	±56	±6	70	SIP
IE0512S-1W	5	4.75~5.25	±12	±42	±5	72	SIP
IE0515S-1W	5	4.75~5.25	±15	±33	±4	72	SIP
IE1205S-1W	12	11.4~12.6	±5	±100	±10	70	SIP
IE1209S-1W	12	11.4~12.6	±9	±56	±6	72	SIP
IE1212S-1W	12	11.4~12.6	±12	±42	±5	73	SIP
IE1215S-1W	12	11.4~12.6	±15	±33	±4	73	SIP
IE2405S-1W	24	22.8~25.2	±5	±100	±10	72	SIP
IE2409S-1W	24	22.8~25.2	±9	±56	±6	72	SIP
IE2412S-1W	24	22.8~25.2	±12	±42	±5	73	SIP
IE2415S-1W	24	22.8~25.2	±15	±33	±4	73	SIP

COMMON SPECIFICATIONS

Short circuit protection	1 second
Temperature rise at full load	25°C MAX, 15°C TYP
Cooling	Free air convection
Operating temperature range	-40°C~+85°C
Storage temperature range	-55°C ~+125°C
Lead temperature	300°C (1.5mm from case for 10 seconds)
Storage humidity range	≤ 95%
Case material	Plastic (UL94-V0)
MTBF	>3,500,000 hours

ISOLATION SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute	3000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Item	Test conditions	MIN	TYP	MAX	Units
Output power		0.1		1	W
Line regulation	For Vin change of ±5%			0.25	%
Load regulation	10% to 100% full load			1	%
Output voltage accuracy	100% full load			±3	%
Temperature drift	100% full load			0.03	%/°C
Output ripple	20MHz Bandwidth		10	15	mVp-p
Switching frequency	Full load, nominal input		100		KHz

Note:



1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.



MORNSUN Science & Technology Ltd.

Address: 8th floor 8th building, Hangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
<http://www.mornsun-power.com>

TYPICAL CHARACTERISTICS

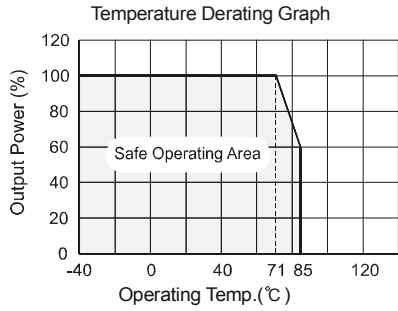


<Figure 1>

PIN CONNECTIONS


Pin	Function
1	Vin
2	GND
7	+Vo
9	-Vo
10	0V

OUTLINE DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS

IEXXXXS-1W Package

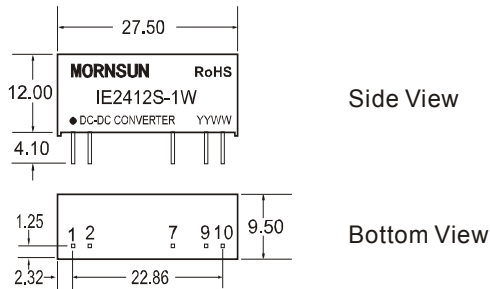

IEXXXXS-1W Footprint



Note: All Pins on a 2.54mm pitch; all pin diameters are 0.50mm; all dimensions in mm.

APPLICATION NOTE

Filtering

In some circuits which are sensitive to noise and ripple, a filtering capacitor may be added to the DC/DC output end and input end to reduce the noise and ripple. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, providing the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor refer to the **External Capacitor Table**. To get an extreme low ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, which may produce a more significant filtering effect. It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference (see figure 1).

Requirement on output load

To ensure this module can operate efficiently and reliably, a minimum load is specified for this kind of DC/DC converter in addition to a maximum load (namely full load). During operation, make sure the specified range of input voltage is not exceeded, the minimum output load is **not less than 10%** of the full load, that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (IE_S -0.25W series).

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

External Capacitor Table

V _{in}	External capacitor	V _{out}	External capacitor
5VDC	4.7uF	5VDC	4.7uF
12VDC	2.2uF	9VDC	2.2uF
24VDC	1uF	12VDC	1uF
--	--	15VDC	0.47uF



MORNSUN Science & Technology Ltd.

Address: 8th floor 8th building, Huangzhou Industrial District, Guangzhou, China
 Tel: 86-20-38601850
 Fax: 86-20-38601272
 Http: //www.mornsun-power.com