



## G\_S-1W & H\_S-1W Series

1W, FIXED INPUT, 6000V ISOLATED & UNREGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER



### FEATURES

- Small Footprint
- SIP Package
- 6KVDC Isolation
- Low Isolation Capacitance
- Temperature Range: -40°C ~ +85°C
- No Heatsink Required
- Internal SMD Construction
- Industry Standard Pinout
- RoHS Compliance

### APPLICATIONS

The G\_S-1W & H\_S-1W series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 10\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 6000\text{VDC}$ );
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

### MODEL SELECTION

G0505S-1W

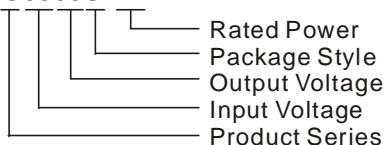

| PRODUCT PROGRAM |               |           |               |              |          |                     |             |    |    |
|-----------------|---------------|-----------|---------------|--------------|----------|---------------------|-------------|----|----|
| Part Number     | Input         |           | Output        |              |          | Efficiency (% Typ.) | Certificate |    |    |
|                 | Voltage (VDC) |           | Voltage (VDC) | Current (mA) |          |                     |             |    |    |
|                 | Nominal       | Range     |               | Max.         | Min.     |                     |             |    |    |
| H0505S-1W       | 5             | 4.5-5.5   | 5             | 200          | 20       | 70                  | UL          |    |    |
| H0509S-1W       |               |           | 9             | 111          | 12       | 72                  | UL          |    |    |
| H0512S-1W       |               |           | 12            | 84           | 9        | 73                  | UL          |    |    |
| H0515S-1W       |               |           | 15            | 67           | 7        | 74                  | UL          |    |    |
| G0505S-1W       |               |           | $\pm 5$       | $\pm 100$    | $\pm 10$ | 70                  |             |    |    |
| G0509S-1W       |               |           | $\pm 9$       | $\pm 56$     | $\pm 6$  | 72                  |             |    |    |
| G0512S-1W       |               |           | $\pm 12$      | $\pm 42$     | $\pm 5$  | 73                  |             |    |    |
| G0515S-1W       |               |           | $\pm 15$      | $\pm 33$     | $\pm 4$  | 75                  |             |    |    |
| H1205S-1W       |               |           | 12            | 10.8-13.2    | 5        | 200                 | 20          | 70 | UL |
| H1209S-1W       |               |           |               |              | 9        | 111                 | 12          | 71 | UL |
| H1212S-1W       | 12            | 84        |               |              | 9        | 72                  | UL          |    |    |
| H1215S-1W       | 15            | 67        |               |              | 7        | 74                  | UL          |    |    |
| G1205S-1W       | $\pm 5$       | $\pm 100$ |               |              | $\pm 10$ | 70                  |             |    |    |
| G1209S-1W       | $\pm 9$       | $\pm 56$  |               |              | $\pm 6$  | 71                  |             |    |    |
| G1212S-1W       | $\pm 12$      | $\pm 42$  |               |              | $\pm 5$  | 72                  |             |    |    |
| G1215S-1W       | $\pm 15$      | $\pm 33$  |               |              | $\pm 4$  | 75                  |             |    |    |

| COMMON SPECIFICATIONS     |                                |                     |      |      |         |  |
|---------------------------|--------------------------------|---------------------|------|------|---------|--|
| Item                      | Test Conditions                | Min.                | Typ. | Max. | Units   |  |
| Storage humidity range    |                                |                     |      | 95   | %       |  |
| Operating temperature     |                                | -40                 |      | 85   | °C      |  |
| Storage temperature       |                                | -55                 |      | 125  |         |  |
| Temp. rise at full load   |                                |                     | 15   | 25   |         |  |
| Lead temperature          | 1.5mm from case for 10 seconds |                     |      | 300  |         |  |
| Short circuit protection* | 5V input voltage               |                     |      | 1    | s       |  |
|                           | 12V input voltage              | Continuous          |      |      |         |  |
| Cooling                   |                                | Free air convection |      |      |         |  |
| Case material             |                                | Plastic(UL94-V0)    |      |      |         |  |
| MTBF                      |                                | 3500                |      |      | k hours |  |
| Weight                    |                                |                     | 4.2  |      | g       |  |

\*When input voltage (Nominal) is 5V, Supply voltage must be discontinued at the end of short circuit duration.

### MORNSUN Science & Technology co.,Ltd.

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China  
 Tel: 86-20-38601850  
 Fax: 86-20-38601272  
<http://www.mornsun-power.com>

## ISOLATION SPECIFICATIONS

| Item                  | Test conditions                 | Min. | Typ. | Max. | Units |
|-----------------------|---------------------------------|------|------|------|-------|
| Isolation voltage     | Tested for 1 minute and 1mA max | 6000 |      |      | VDC   |
| Isolation resistance  | Test at 500VDC                  | 1000 |      |      | MΩ    |
| Isolation capacitance |                                 |      |      | 10   | pF    |

## OUTPUT SPECIFICATIONS

| Item                    | Test conditions               | Min.                         | Typ. | Max.  | Units |
|-------------------------|-------------------------------|------------------------------|------|-------|-------|
| Output power            |                               | 0.1                          |      | 1     | W     |
| Line regulation         | For Vin change of ±1%         |                              |      | ±1.2  |       |
| Load regulation         | 10% to 100% load (5V output)  |                              | 12.8 | 15    | %     |
|                         | 10% to 100% load (9V output)  |                              | 8.3  | 15    |       |
|                         | 10% to 100% load (12V output) |                              | 6.8  | 15    |       |
|                         | 10% to 100% load (15V output) |                              | 6.3  | 15    |       |
| Output voltage accuracy |                               | See tolerance envelope graph |      |       |       |
| Temperature drift       | 100% full load                |                              |      | ±0.03 | %/°C  |
| Ripple & Noise*         | 20MHz Bandwidth               |                              | 150  | 200   | mVp-p |
| Switching frequency     | Full load, nominal input      | (5V input)                   | 250  |       | kHz   |
|                         |                               | (12V input)                  | 50   |       |       |

\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.  
Note: Dual output models unbalanced load: ±5%.

## APPLICATION NOTE

### 1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

### 2) Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

### 3) Output Voltage Regulation and Over-voltage Protection Circuit



The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

### 4) Overload Protection


Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

### 5) No parallel connection or plug and play


## TYPICAL CHARACTERISTICS

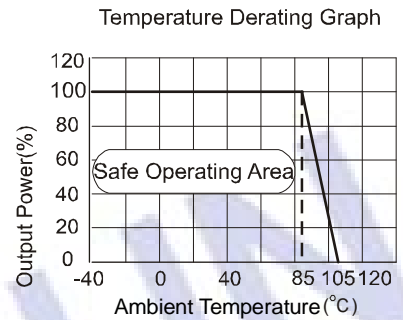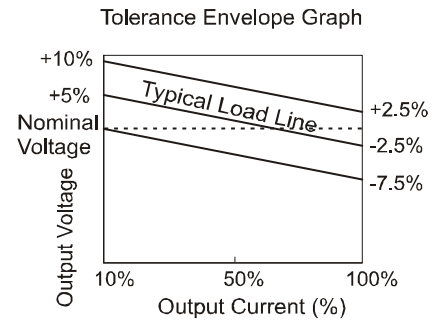

## RECOMMENDED CIRCUIT

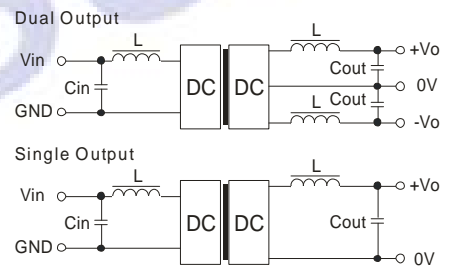

(Figure 1)

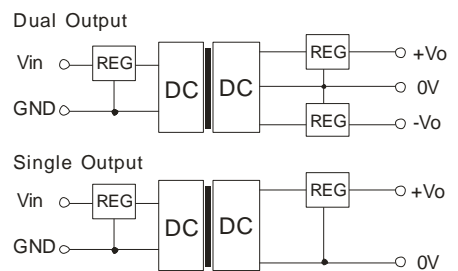

(Figure 2)


## EXTERNAL CAPACITOR TABLE (TABLE 1)

| Vin (VDC) | Cin (μF) | Single Vout (VDC) | Cout (μF) | Dual Vout (VDC) | Cout (μF) |
|-----------|----------|-------------------|-----------|-----------------|-----------|
| 5         | 4.7      | 5                 | 10        | ±5              | 4.7       |
| 12        | 2.2      | 9                 | 4.7       | ±9              | 2.2       |
| -         | -        | 12                | 2.2       | ±12             | 2.2       |
| -         | -        | 15                | 1         | ±15             | 1         |

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

## OUTLINE DIMENSIONS & PIN CONNECTIONS

### MECHANICAL DIMENSIONS

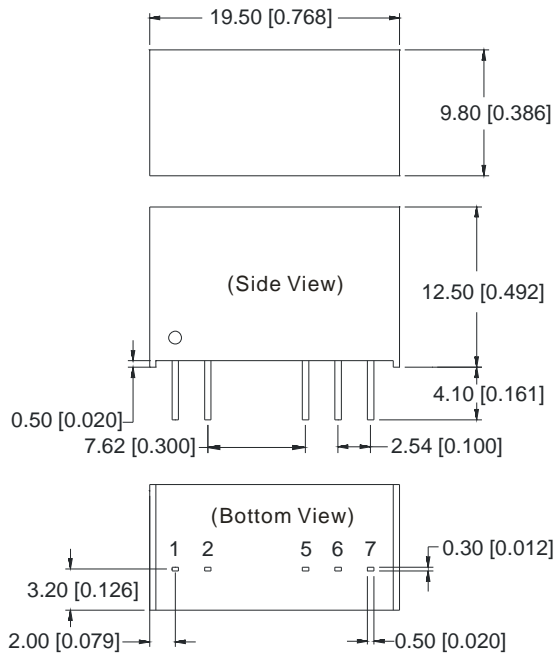


| FOOTPRINT DETAILS |        |      |
|-------------------|--------|------|
| Pin               | Single | Dual |
| 1                 | Vin    | Vin  |
| 2                 | GND    | GND  |
| 5                 | 0V     | -Vo  |
| 6                 | No Pin | 0V   |
| 7                 | +Vo    | +Vo  |


Note:  
 Unit:mm[inch]  
 Pin section tolerances:  $\pm 0.10\text{mm}$  [ $\pm 0.004\text{inch}$ ]  
 General tolerances:  $\pm 0.25\text{mm}$  [ $\pm 0.010\text{inch}$ ]

### RECOMMENDED FOOTPRINT


#### DUAL OUTPUT

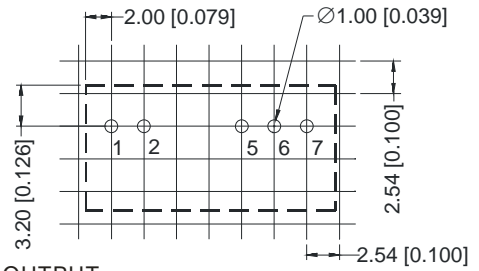

#### SINGLE OUTPUT

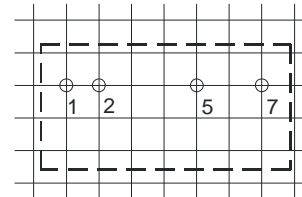

### TUBE OUTLINE DIMENSIONS

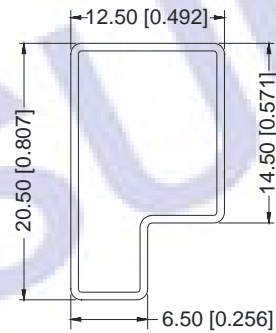

Note:  
 Unit :mm[inch]  
 General tolerances:  $\pm 0.50\text{mm}$  [ $\pm 0.020\text{inch}$ ]  
 L=530mm[20.866inch] Devices per tube quantity: 25pcs  
 L=220mm[8.661inch] Devices per tube quantity: 10pcs

#### Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specification listed.
2. All specifications measured at  $T_a=25^\circ\text{C}$ , humidity<75%, nominal input voltage and rated output load unless otherwise specified.
3. Only typical models listed, other models may be different, please contact our technical person for more details.
4. In this datasheet, all the test methods of indications are based on corporate standards.