


## Mini Relay I/O card (New)

Back to: [N series](#) / [R series](#) / [MX series](#)  
[RT 1-3 kVA](#) / [RT 5-10 kVA](#)

PN: 3915101864-S

SAP NAME: MINI RELAY I/O CARD DELTA

**Description:** Mini Relay I/O card expands communication ability of the UPS and has to be install in Mini card slot. Card allows monitoring of UPS with 6 output programmable dry contacts and controls with 2 input contacts.

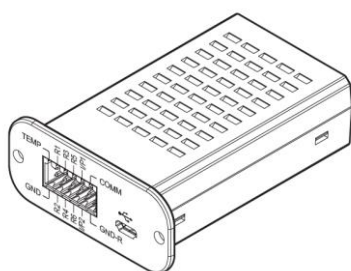

### Technical specifications:

Size	87 x 69 x 30 mm
Weight	70 g
Operating Temperature	0 - 50° C
Operating Humidity	10 - 80 %
Power Input	12 ± 3V DC
Power Consumption	3 Watts

### Features:

- UPS status information available in 6 programmable output contacts (NO/NC).
- Configurable 2 input contacts as UPS shutdown or battery test.
- Configurable UPS shutdown delay time.
- Temperature detection port for temperature sensor.

### Applicable to UPS:

- N series from Rev. 05.
- R series.
- RT series 5-10kVA.
- MX series.

