

240W, 120-277Vac Input Smart Constant Voltage LED Driver

Product Datasheet



The global certified BLD-240-V series is a dual stage high efficiency smart LED driver. NFC programmable output voltage, minimum level and high frequency PWM output provides great user experience. 100khour long life and 7-year warranty provide high confidence to luminaire users. It supports not only traditional dimming control, but also DALI2.0 and other protocols. All around protections including digital OTP, SCP and OCP with auto-recovery secure 24hour non-stop operation for luminaires.

☒ Strip ☒ Light box ☒ Signage ☒ Bath ☒ Swimming



■ Features	2
■ Model List	2
■ Technical Data	3
■ Dimming	4
■ Safety/EMC Compliance	6
■ Lifetime vs. Case Temperature	6
■ Power Factor vs. Load	7
■ THD vs. Load	7
■ Efficiency vs. Load (24V Model)	8
■ Inrush Current	8
■ Dielectric Strength	9
■ Tc Point	9
■ Packaging Information	9
■ Mechanical Design	10
■ Revision History	15

240W, 120-277Vac Input Smart Constant Voltage LED Driver

■ Features

- Supply Voltage: 108-305Vac or 127-250Vdc, 380Vac for 2 hours
- Great Surge Immunity 10kV
- Programmable Output Voltage
- Programmable PWM Frequency, Minimum Dimming Level, Startup and Fade-out (Dimmable models only)
- Customizable with Features (Energy Report, Input Voltage Monitoring)
- 100,000Hour Life @ Tc=75°C
- 7 Year Warranty @ Tc<=75°C
- 0-10V/PWM/DALI2.0/Push (Switch) /DMX (RDM) Dimmable
- 0.5% Minimum Dimming Output
- Dim Off with 0.5W Standby
- Class II Model Available
- UL Class P, ENEC/CB/CCC SELV Output
- Safety according to EN 61347-1, 61347-2-3 61347-2-13, 62384

■ Model List

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Programming Range	Output Current Min	Output Current Max
BLD-240-V024-NNZ	108 ~ 305 Vac	240 W	24V	-5%~10%	0	10A
BLD-240-V048-XYZ	108 ~ 305 Vac	240 W	48V	-5%~10%	0	5A

XY=	Dimming Method	Programmable	Vaux	Dim-off Power
NR-A00000	-	NFC	-	-
DR-A00000	0-10V Default or PWM by Programming		-	<0.5W
ER-A00000			24V	
AR-A00000	DALI2.0 + Push Dim		-	
AR-DAX000	D4i		24V	
MR-A00000	DMX and RDM		-	

Z=	U	V	S	W	D
Input Cable	3 pin UL cable with ground	3 pin UL cable with ground	3 pin VDE cable with ground	3 pin VDE cable with ground	2 pin VDE cable without ground
Output Cable	2 pin UL cable without Ground	3 pin UL cable with ground	2 pin VDE cable without ground	3 pin VDE cable with ground	2 pin VDE cable without ground
Certified Input Voltage Range	UL Listed Class P FCC 120-277Vac	UL Listed Class P FCC 120-277Vac	ENEC CB RCM Class I 220-277Vac	Class I 120-277Vac	ENEC CB Class II 220-277Vac

Note: Dimmable Drivers Do NOT Support Switching DCDC Regulator as Load

240W, 120-277Vac Input Smart Constant Voltage LED Driver

■ Technical Data

Input Voltage	108~305Vac, 380Vac for 24 hours
Input Frequency	47~63Hz
Power Factor	>0.9@60-100%load, refer to PF vs. Load curve
THD	<15%@60-100%load, refer to THD vs. Load curve
Input Current	2.2Amax@120Vac & Full-Load, 1.1Amax@220Vac & Full-Load
Inrush Current	See Inrush Current Section in the datasheet
Leakage Current	0.75MIU max @277Vac 60Hz, UL8750 0.7mA max @240Vac 50/60Hz, IEC60598-1
Input Under Voltage	Shut down and auto-restart
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Output Voltage Accuracy	±1%Vo
Output Voltage Range	-5% ~ 10%Vo Programmable
Output PWM Range	300Hz ~ 10kHz Programmable
Voltage Ripple	Vp-p:5%Vo max
Setup Time	1.2s max.
Output Overshoot	10% Vo, max.
Output Over Current	120% Io, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Turn off the output when $T_c \geq 105 \pm 10^\circ\text{C}$; Auto Recovery When $T_c \leq 70 \pm 10^\circ\text{C}$
Operating Temperature	Case Temperature $T_c = -40^\circ\text{C} \sim +90^\circ\text{C}$; 10%RH ~ 100%RH
Storage Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$; 5%RH ~ 100%RH
MTBF	$\geq 280,000$ hours, 75°C case temperature (MIL-HDBK-217F)
Lifetime	$\geq 100,000$ hours, 75°C case temperature, refer to life vs. T_c curve
Case Temperature	90°C max, marked in the T_c point of label
Dimension	6.85x2.67x1.52 by inch (body), 7.91x2.67x1.52 by inch (endcaps included) 175.0x68.0x38.5 by mm (body), 201.0x68.0x38.5 by mm (endcaps included)
Net Weight	850g
Packing	See Package Information Section in the datasheet

Notes: Unless specified, all the test results are measured in 25°C room temperature.


240W, 120-277Vac Input Smart Constant Voltage LED Driver

■ Dimming


Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	100uA	150uA	200uA
Vdim Allowed Input Voltage	-20 V		20 V
0-10V Dimming Range	0.5% Default (Programmable)	Linear	100% (Vdim=9~10V)
PWM Dimming Range	0.5% Default (Programmable)	Linear	100% (Duty=90-100%)
Dim off threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Dim on threshold	0.6V or 6%	0.7V or 7%	0.8V or 8%
PWM High	3.8V		10V
PWM Low	0V		0.6V
PWM Frequency	300Hz		2kHz
External PWM Controller Current Sinking Capability	300uA		
DALI Interface Standard	IEC62386-101,102,207,150,250,251,252,253		
DALI Dimming Range	0.5% Default (programmable)	Logarithmic as default (programmable to linear)	100%
DA1,DA2 High Level	9.5	16	22.5
DA1,DA2 Low Level	-6.5	0	6.5
DA1,DA2 Current	0		2mA
DMX Dimming Range	0.5% Default (Programmable)	Linear (default)	100%
DMX+ & DMX- Voltage	-6V		6V
DMX to Ground Resistance	25Mohm		
Logic 0/1 (DMX+ to DMX-) Threshold		0.2V	
Communication Baud Rate		250kbps	

- Default Dimming Curves

0-10V Dimming Curve

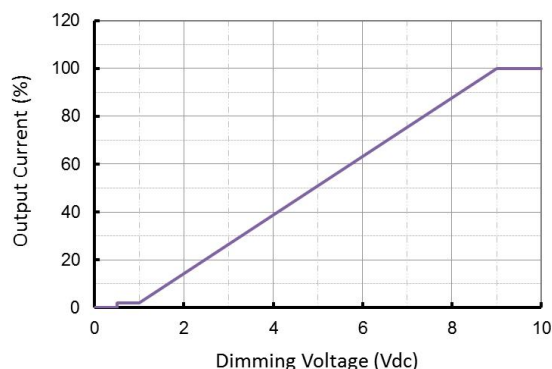


PWM Dimming Curve

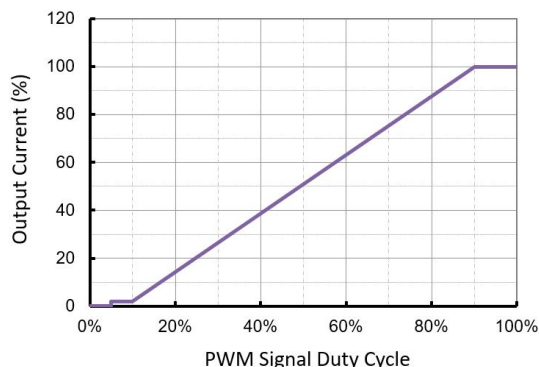


240W, 120-277Vac Input Smart Constant Voltage LED Driver

DALI Dimming Curve

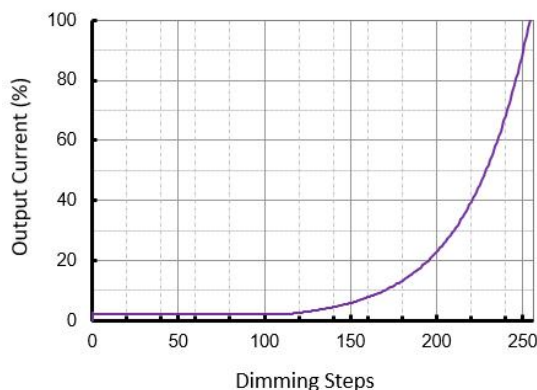


DMX/RDM Dimming Curve

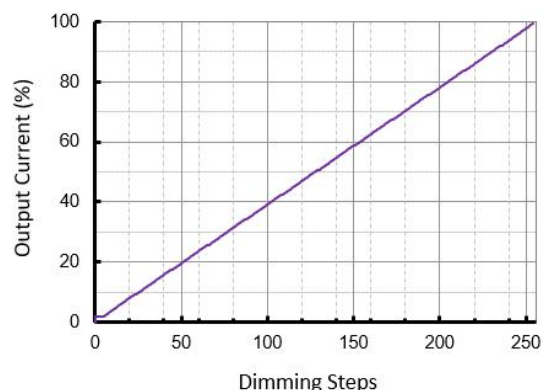

Note: Both DALI and DMX dimming curves can be customized to be linear or logarithmic as default.

- Dimming Wiring

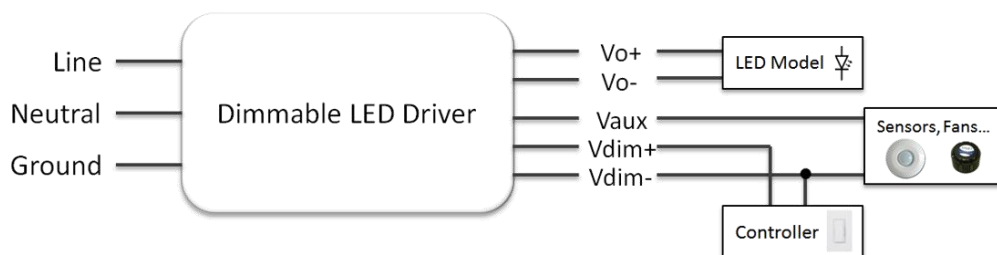


- Push (Switch) Dim

A short press (50-600 ms) switches the device on or off

A long press (> 600 ms) fades the connected operating device alternately up and down (between 2 and 100%). Up and down slew rate is 20%/s.

Long push for 15s to synchronize.

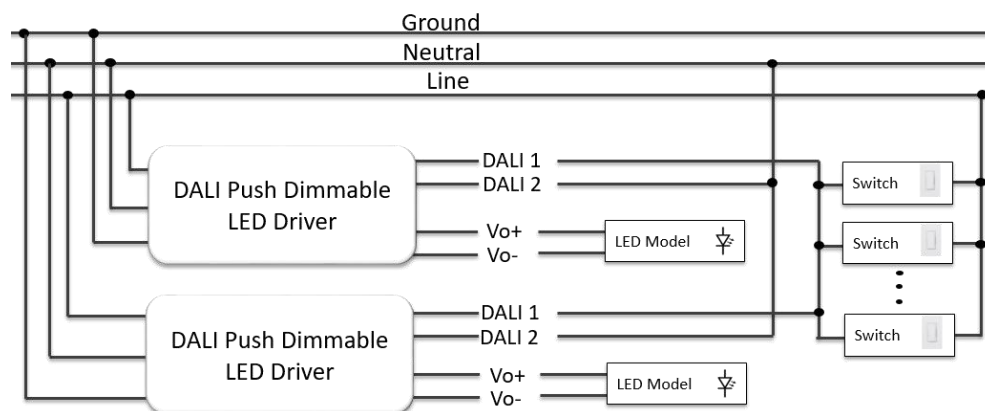


240W, 120-277Vac Input Smart Constant Voltage LED Driver

Safety/EMC Compliance


Safety Standards	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012	Power units other than class 2
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
IEC 62384	DC or AC supplied electronic control gear for LED modules - Performance requirements
EMC Standards	Description
IEC 55015	Conducted emission test & radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
FCC Part 15	ANSI C63.4:2009 Class B
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment

Lifetime vs. Case Temperature

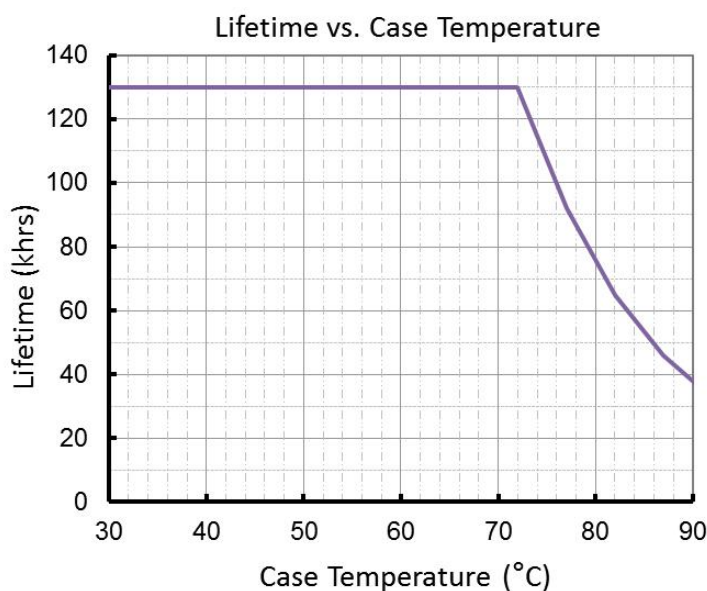


(End of Life: Maximum Failure Rate=10%)


■ Power Factor vs. Load

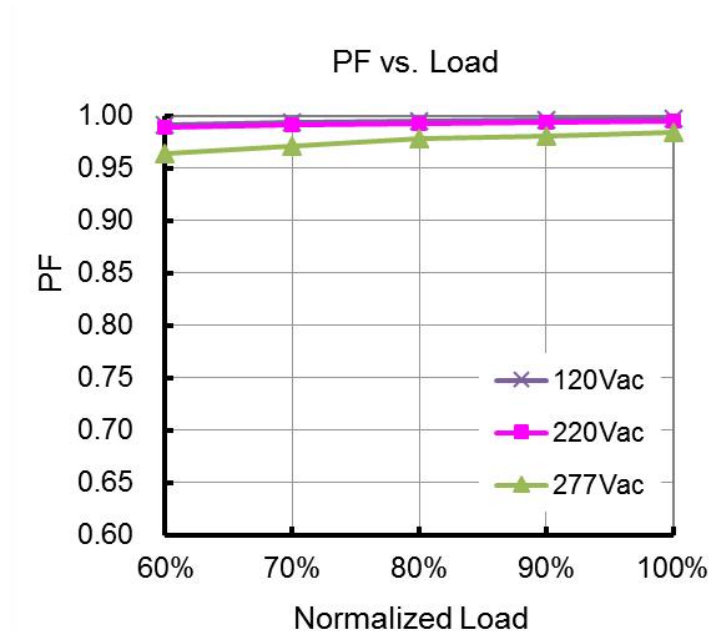


■ THD vs. Load

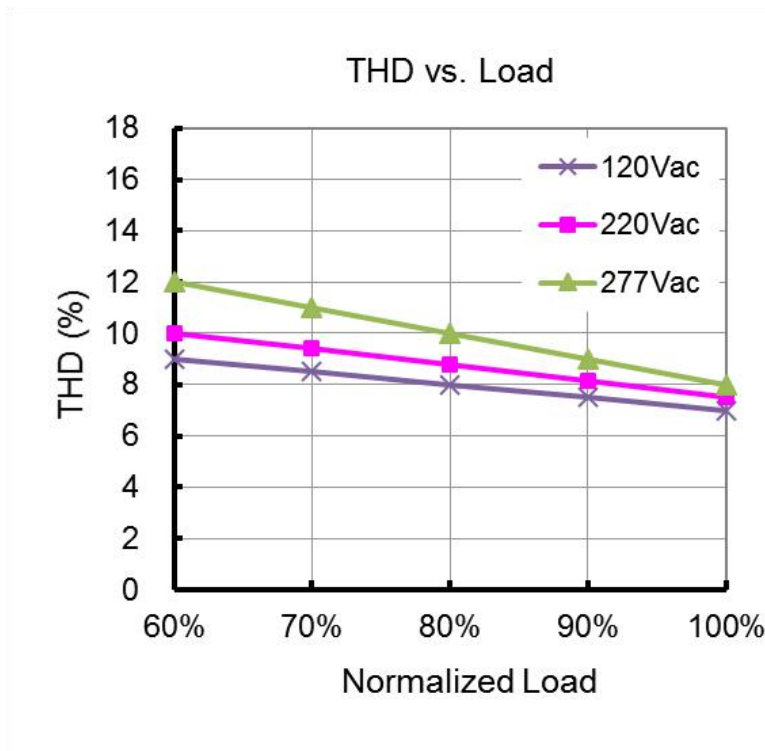

■ Efficiency vs. Load (24V Model)

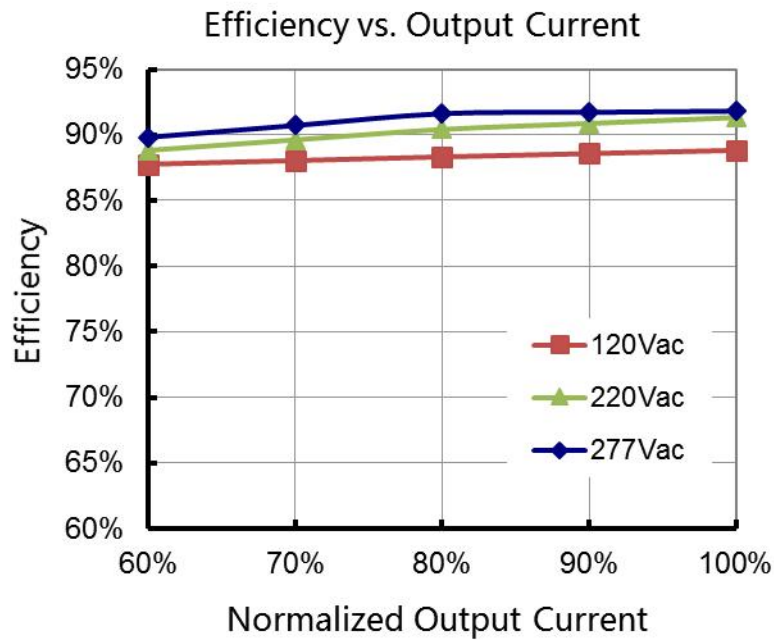

■ Inrush Current

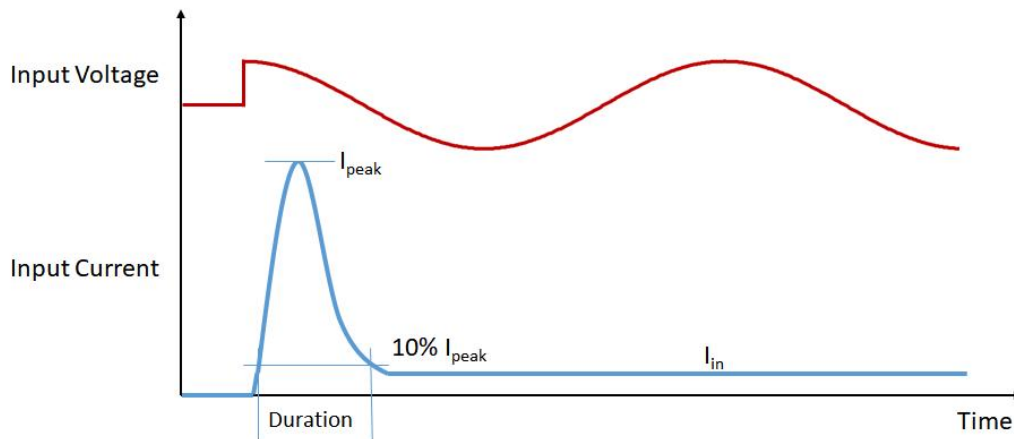

Input Voltage	I_{peak}	Duration
120Vac	33.4A	1.28mS
220Vac	66.0A	1.14mS
277Vac	80.8A	1.12mS


Please contact with us for MCB calculation and waveforms.

240W, 120-277Vac Input Smart Constant Voltage LED Driver

■ Dielectric Strength


Unit: Vac	Input	Output	Dimming	Case
Input	-	3750	3750	1554
Output	3750	-	-	1554
Dimming	3750	-	-	1554
Case	1554	1554	1554	-

■ Tc Point

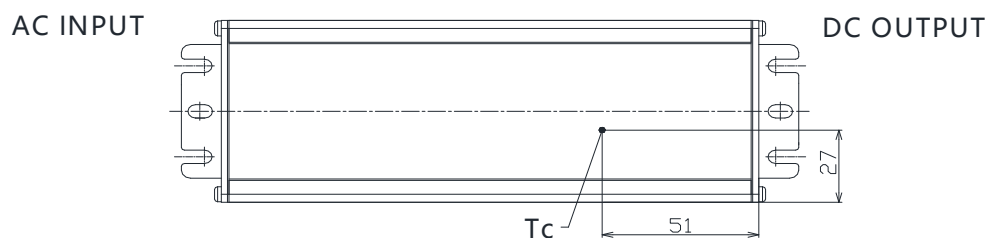

■ Packaging Information


Typical Carton Dimension(L×W×H)	490×370×160 mm
Positioning plate	3pcs/carton
Shield Board	1pcs/carton
LED Drivers/LED	12pcs/carton
Net Weight	10.8 kg/carton
Gross Weight	12.1 kg/carton

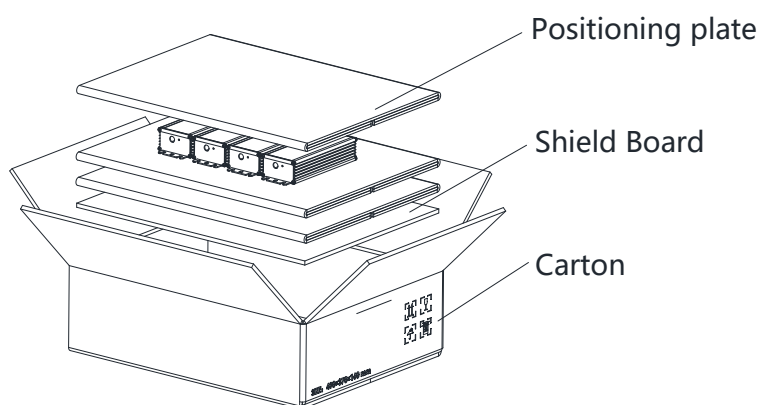


240W, 120-277Vac Input Smart Constant Voltage LED Driver

Mechanical Design

BLD-240-Vxxx-NRU (UL Cable)

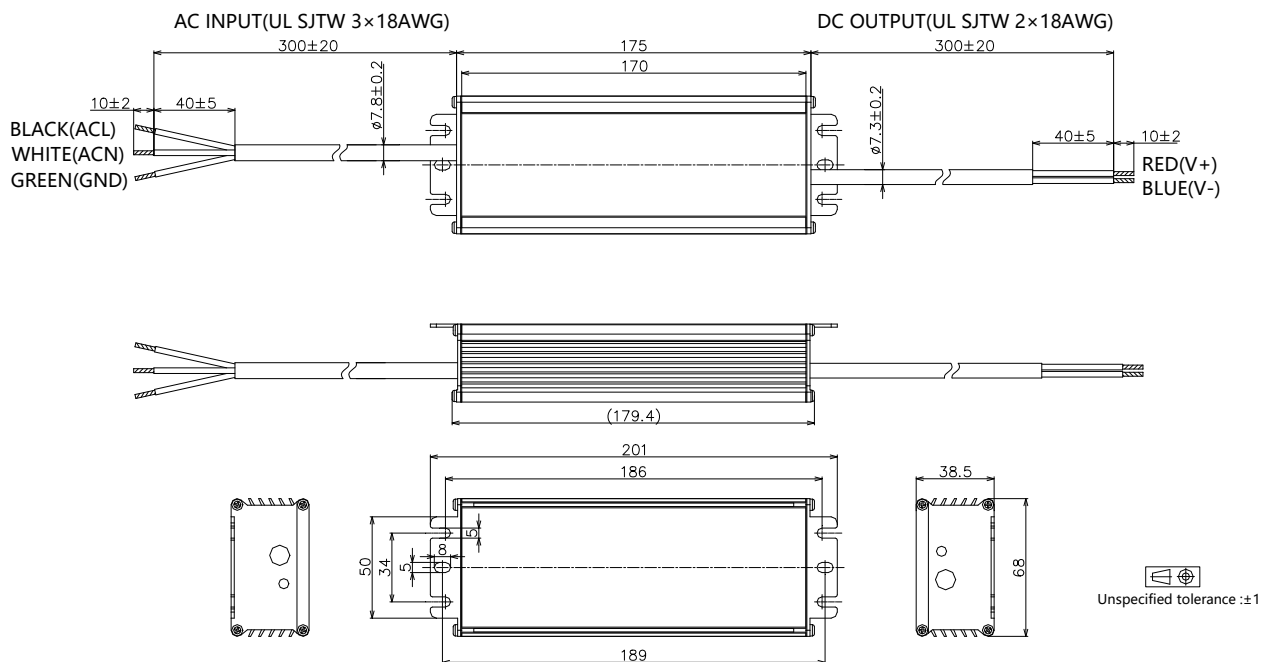


BLD-240-Vxxx-DRU (UL Cable)

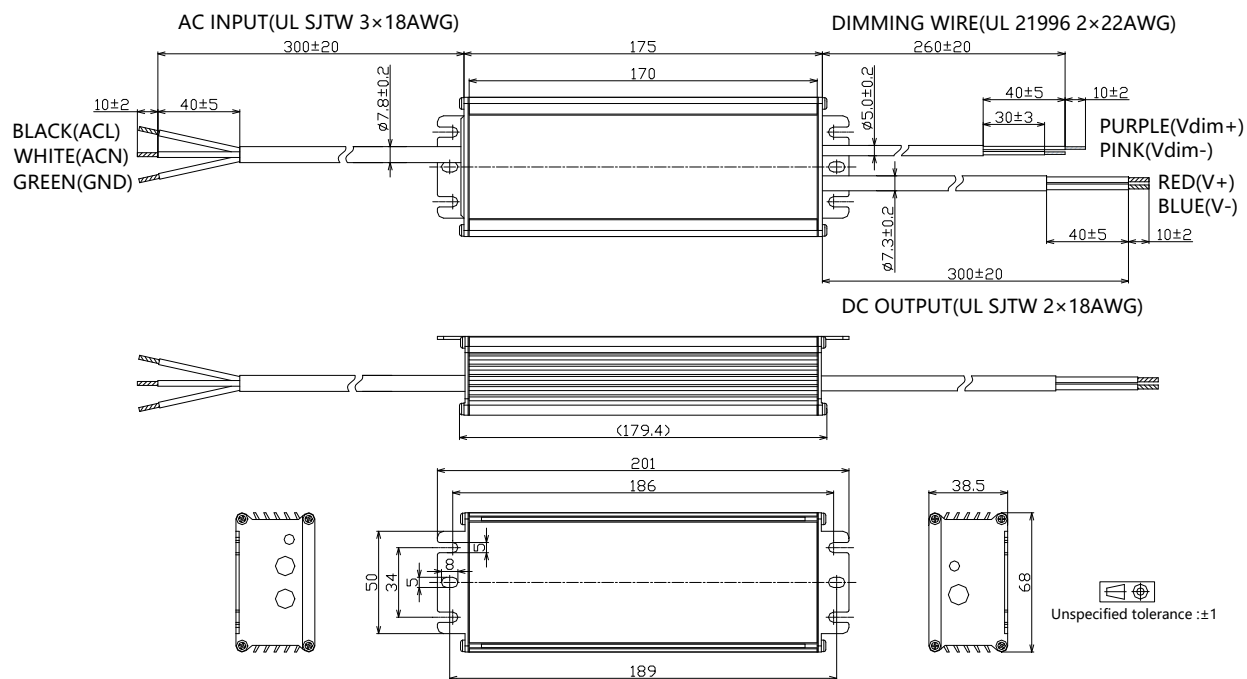


240W, 120-277Vac Input Smart Constant Voltage LED Driver

- BLD-240-Vxxx-ERU (UL Cable)

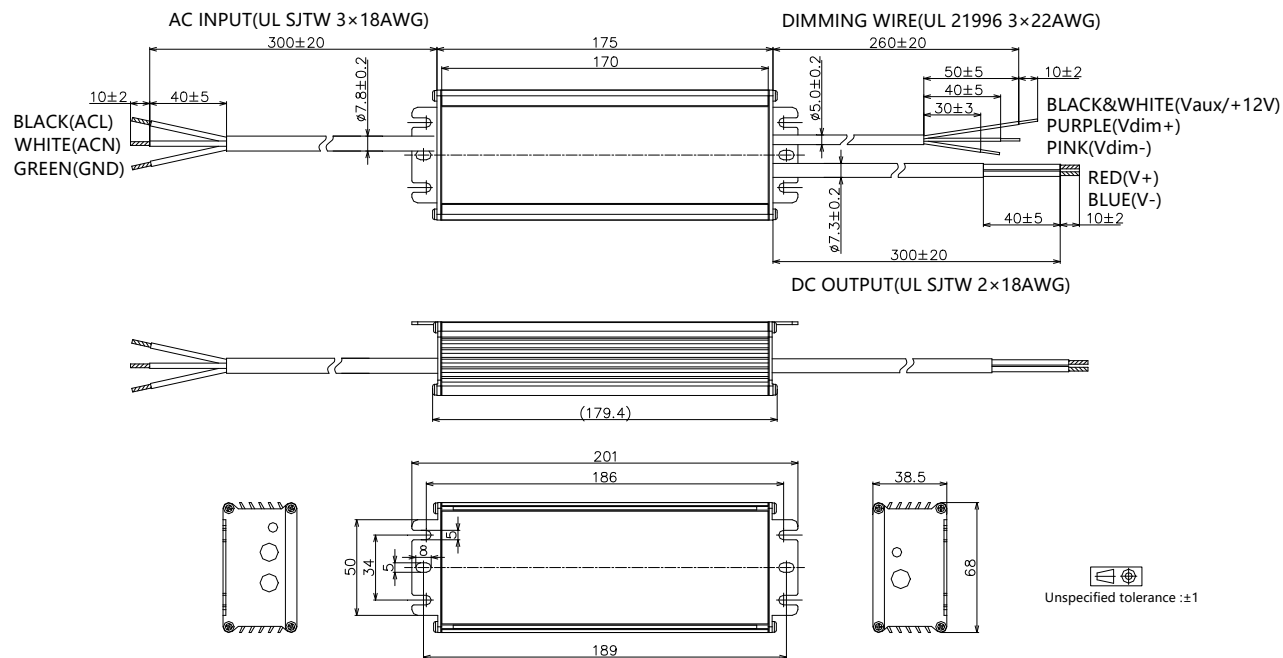


- BLD-240-Vxxx-ARU (UL Cable)

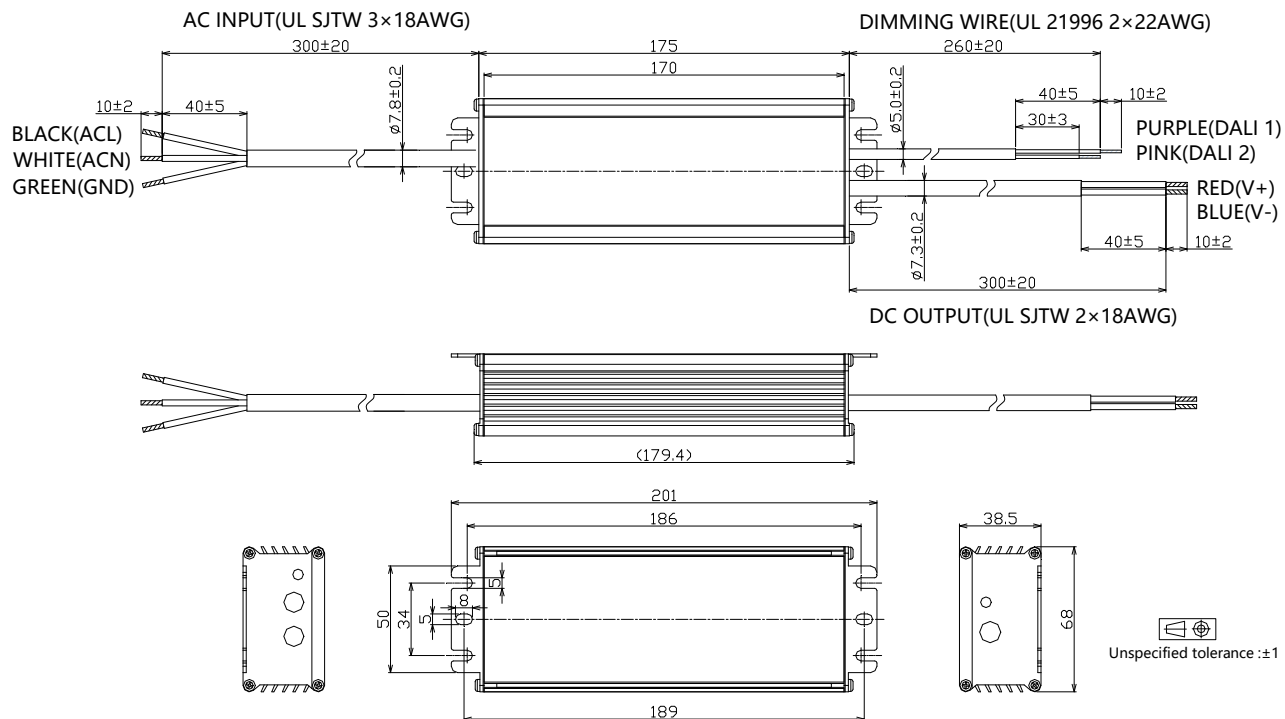


240W, 120-277Vac Input Smart Constant Voltage LED Driver

- BLD-240-Vxxx-MRU (UL Cable)

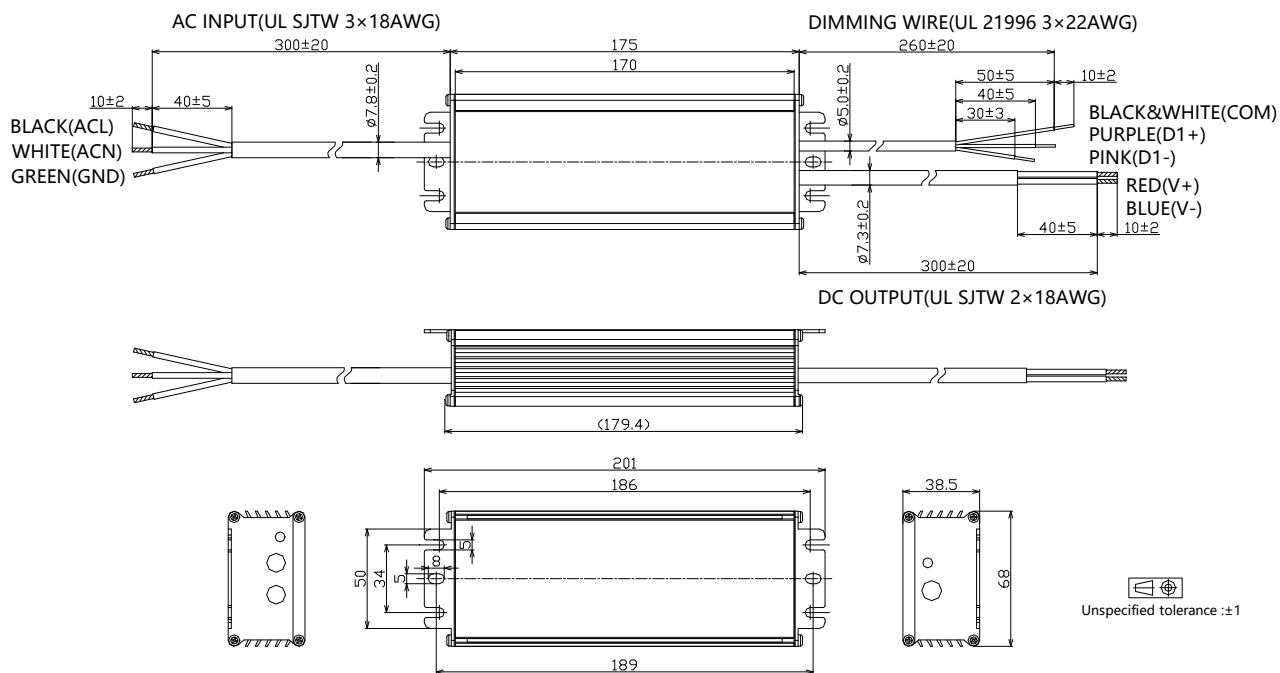


BLD-240-Vxxx-NRS (VDE Cable)

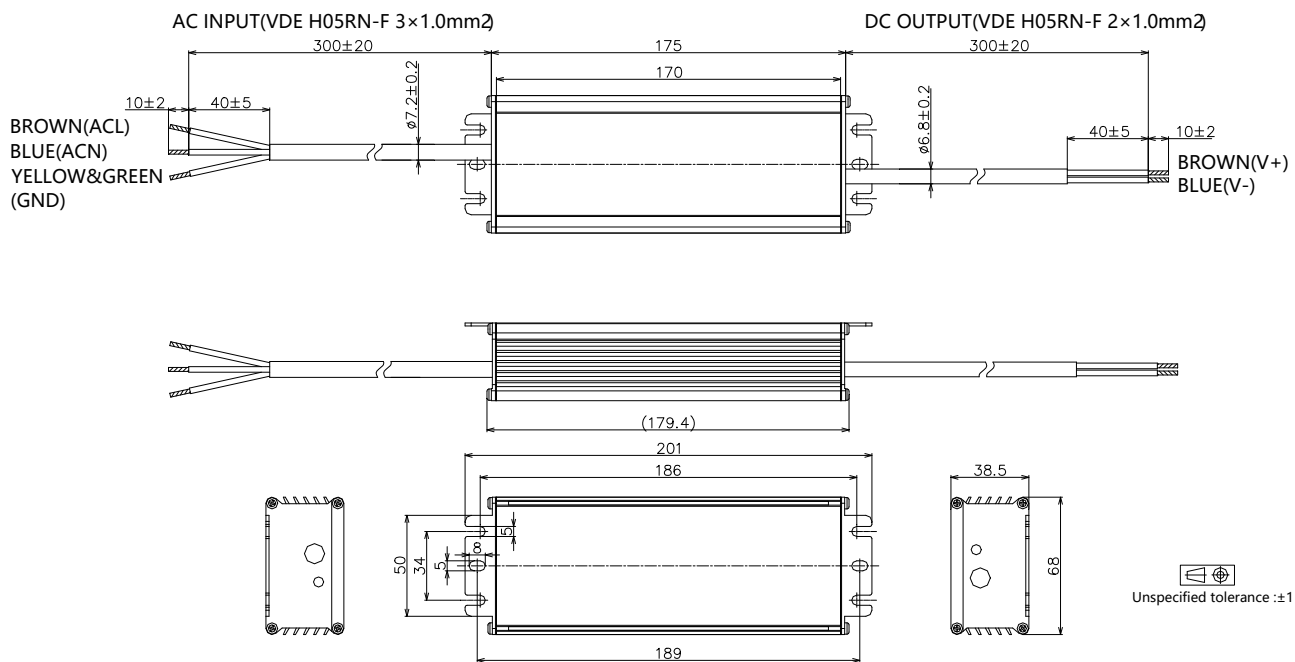


240W, 120-277Vac Input Smart Constant Voltage LED Driver

- BLD-240-Vxxx-DRS (VDE Cable)

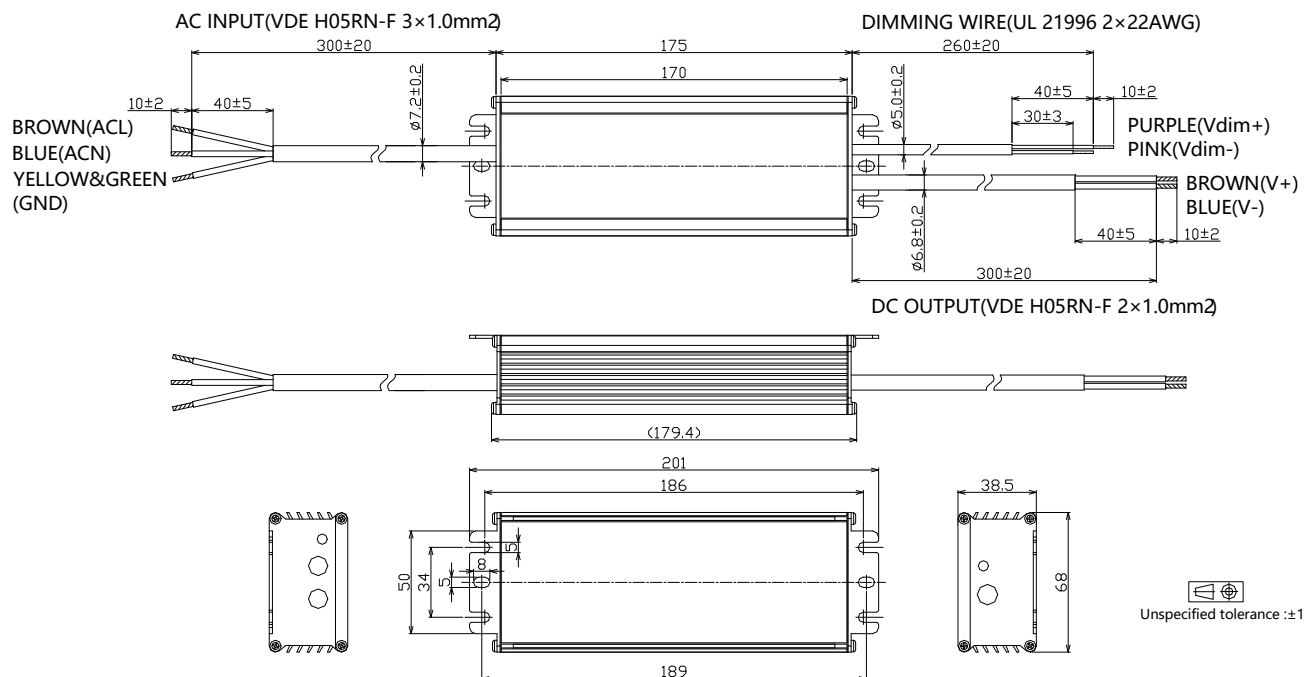


- BLD-240-Vxxx-ERS (VDE Cable)

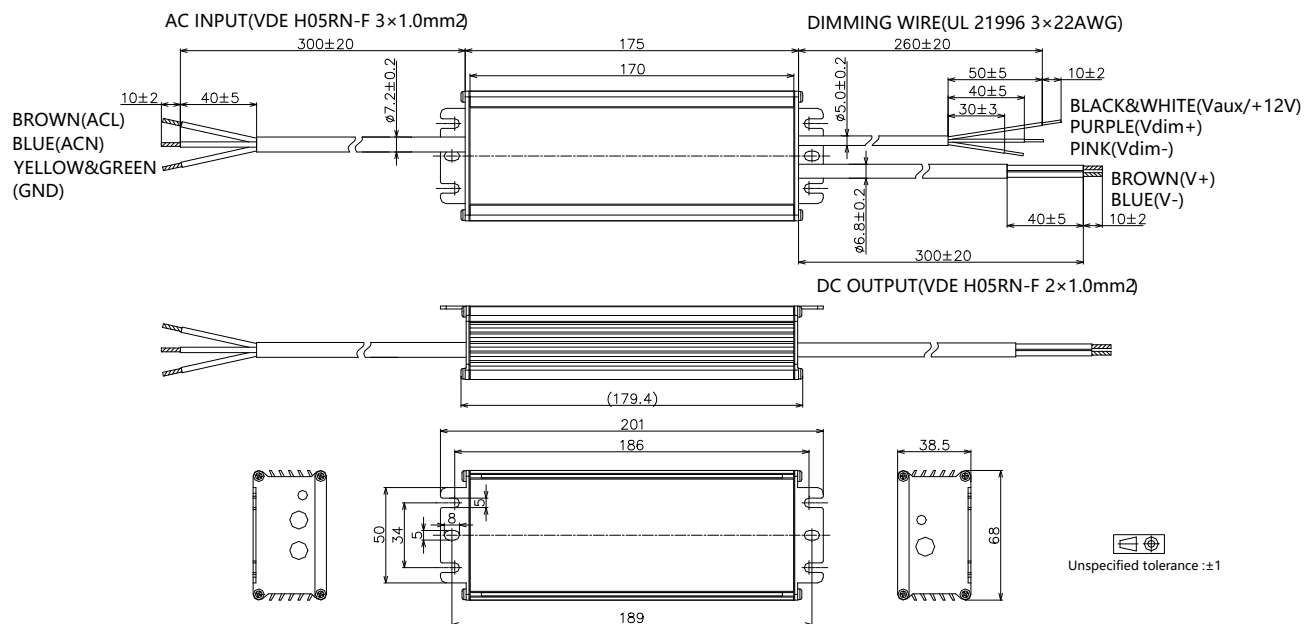


240W, 120-277Vac Input Smart Constant Voltage LED Driver

- BLD-240-Vxxx-ARS (VDE Cable)

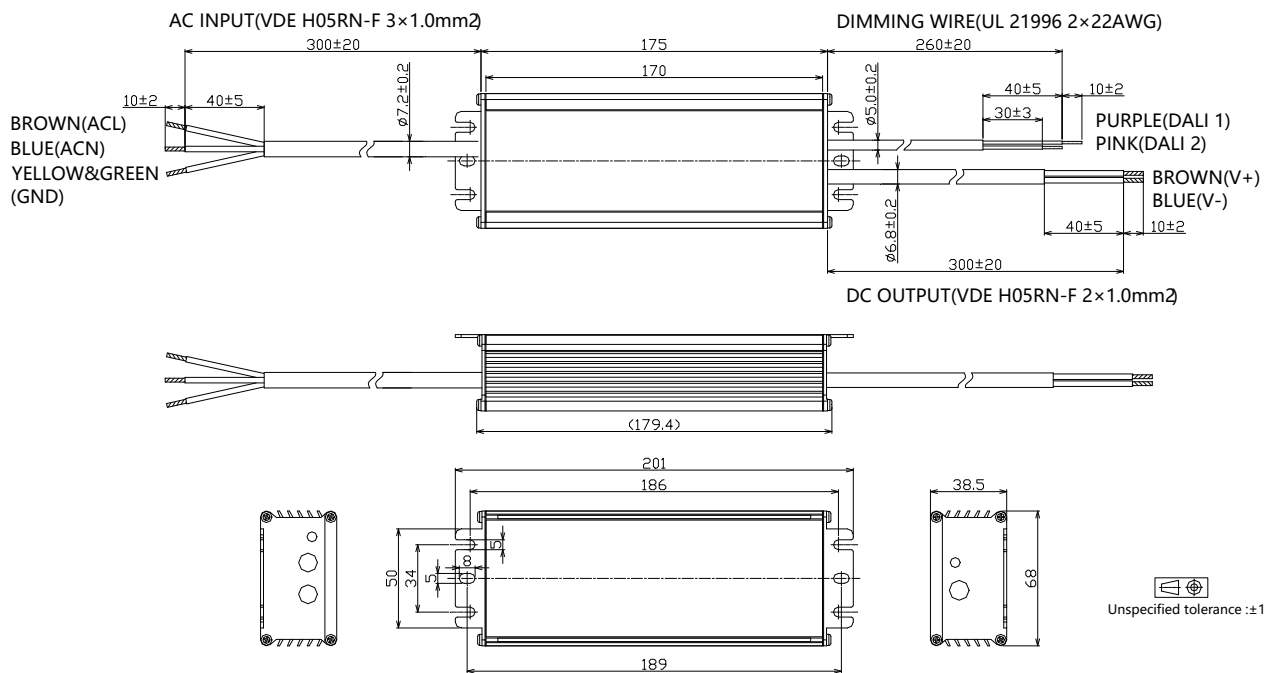

- BLD-240-Vxxx-MRS (VDE Cable)

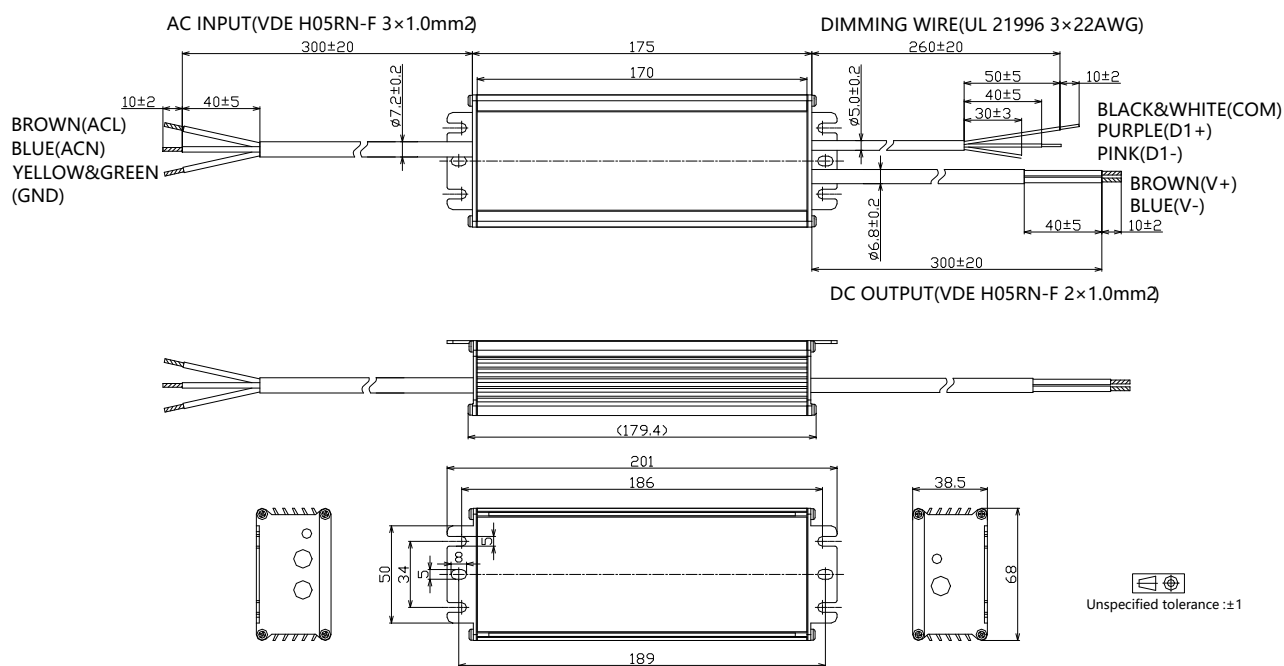

■ Revision History

Revision	Date	Contents
A	2024-4-11	1. Initial Release