
## LED - Lighting and connection technology

Spotlight connectors for COB LED modules

47.319.2030



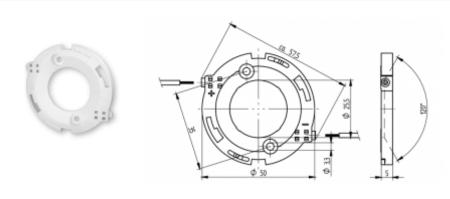

pkg. wt. part no.504 5 g 47.319.2030.50

## Connector for COBs

Suitable for the following LED models:

ManufacturerLED modelCitizenCL-L040/042LextarNimbus 2000/3000Seoul SemiconductorZC25/40

Sunpu G7

Approval: additional cULus (75W /250V)

With integrated reflector interface Easy pre-assembly by LED fixing lugs Screw fixing

Housing: PBT Contacts: CuSn

Rating: 3A / 150 VDC

- Screw fixing: for screws M3 and locking washer
- Max. torque for screw fixing 0.5 Nm
- Strip length: 6+1 mm
- Polarity of LED must be observed
- Specifications of LED manufacturer must be observed
- VDE-Reg. No. E289

LEP-Q-LINE	T 110	<u>_</u>		
			0.25 - 0.5 mm²	0.5 mm <sup>2</sup>

Dokument generiert am: 27.02.14 - 15:21 Uhr