
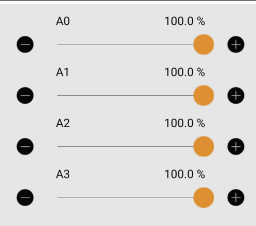

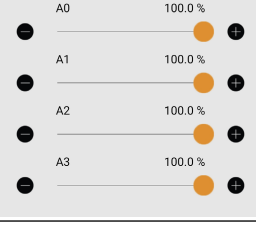

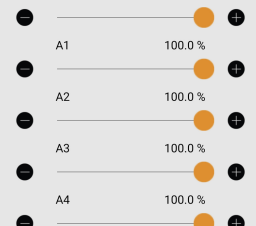

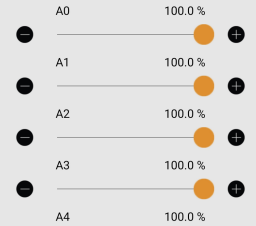

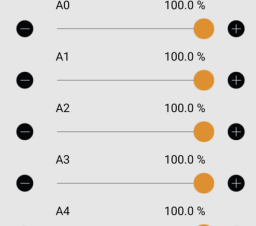

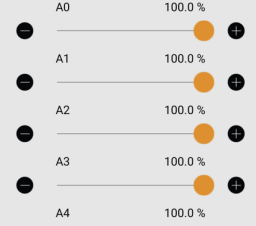




Type	Profile				Description	Manual App Control	
	Fixture ID	Model / Name	Icon	Fixture mode			
DALI	33477**	DALI Lin* Broadcast		DALI/BC/Dim{OHI,H WTemp}	DALI Broadcast. Linear dimming curve. Factory default profile.	Dimmer: BC	
	33478	DALI Log Broadcast		DALI/BC/Dim{OHI,H WTemp}	DALI Broadcast. Logarithmic dimming curve.	Dimmer: BC	
	33479	DALI Lin* BC + Ext. Presence		DALI/BC/Dim{OHI,H WTemp,Presence}	DALI Broadcast. Linear dimming curve. A DALI-2 motion sensor connected to the DALI bus will appear as a Casambi sensor in the App.	Dimmer: BC	
	34854	DALI Log BC + Ext. Presence		DALI/BC/Dim{OHI,H WTemp,Presence}	DALI Broadcast. Logarithmic dimming curve. A DALI-2 motion sensor connected to the DALI bus will appear as a Casambi sensor in the App.	Dimmer: BC	
	33480	DALI Lin* BC + Ext. Light		DALI/BC/Dim{OHI,H WTemp,Daylight}	DALI Broadcast. Linear dimming curve. A DALI-2 light sensor connected to the DALI bus will appear as a Casambi sensor in the App.	Dimmer: BC	
	34855	DALI Log BC + Ext. Light		DALI/BC/Dim{OHI,H WTemp,Daylight}	DALI Broadcast. Logarithmic dimming curve. A DALI-2 light sensor connected to the DALI bus will appear as a Casambi sensor in the App.	Dimmer: BC	
	33481	DALI Lin* BC + Ext. Sensors		DALI/BC/Dim{OHI,H WTemp,Presence,Daylight}	DALI Broadcast. Linear dimming curve. A DALI-2 motion and light sensor connected to the DALI bus will appear as a Casambi sensor in the App.	Dimmer: BC	
	34856	DALI Log BC + Ext. Sensors		DALI/BC/Dim{OHI,H WTemp,Presence,Daylight}	DALI Broadcast. Logarithmic dimming curve. A DALI-2 motion and light sensor connected to the DALI bus will appear as a Casambi sensor in the App.	Dimmer: BC	
	33482	DALI Lin* 1xDIM SA		DALI/Elements{OHI, HWTemp}	DALI DT6 1xDimmer. Linear dimming curve. Automatic DALI addressing.	Dimmer: A0	
	34857	DALI Log 1xDIM SA		DALI/Elements{OHI, HWTemp}	DALI DT6 1xDimmer. Logarithmic dimming curve. Automatic DALI addressing.	Dimmer: A0	
	33483	DALI Lin* 2xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 2xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1	
	34859	DALI Log 2xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 2xDimmers. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1	
	33484	DALI Lin* 3xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 3xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2	
	34860	DALI Log 3xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 3xDimmers. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2	








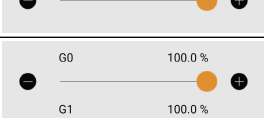



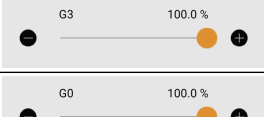



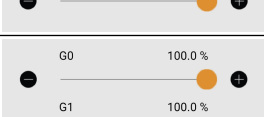


	33485	<b>DALI Lin* 4xDIM SA</b>		DALI/Elements{OHI,H WTemp}	DALI DT6 4xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Dimmer 4:</b> A3	
	34861	<b>DALI Log 4xDIM SA</b>		DALI/Elements{OHI,H WTemp}	DALI DT6 4xDimmers. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Dimmer 4:</b> A3	
	33486	<b>DALI Lin* 5xDIM SA</b>		DALI/Elements{OHI,H WTemp}	DALI DT6 5xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Dimmer 4:</b> A3 <b>Dimmer 5:</b> A4	
	34862	<b>DALI Log 5xDIM SA</b>		DALI/Elements{OHI,H WTemp}	DALI DT6 5xDimmers. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Dimmer 4:</b> A3 <b>Dimmer 5:</b> A4	
	33487	<b>DALI Lin* 6xDIM SA</b>		DALI/Elements{OHI,H WTemp}	DALI DT6 6xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Dimmer 4:</b> A3 <b>Dimmer 5:</b> A4 <b>Dimmer 6:</b> A5	
	34863	<b>DALI Log 6xDIM SA</b>		DALI/Elements{OHI,H WTemp}	DALI DT6 6xDimmers. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Dimmer 4:</b> A3 <b>Dimmer 5:</b> A4 <b>Dimmer 6:</b> A5	








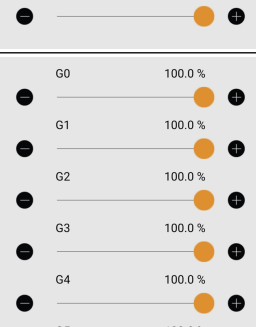




	33488	DALI Lin* 7xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 7xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<p><b>Dimmer 1:</b> A0  <b>Dimmer 2:</b> A1  <b>Dimmer 3:</b> A2  <b>Dimmer 4:</b> A3  <b>Dimmer 5:</b> A4  <b>Dimmer 6:</b> A5  <b>Dimmer 7:</b> A6</p>	
	34864	DALI Log 7xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 7xDimmers. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<p><b>Dimmer 1:</b> A0  <b>Dimmer 2:</b> A1  <b>Dimmer 3:</b> A2  <b>Dimmer 4:</b> A3  <b>Dimmer 5:</b> A4  <b>Dimmer 6:</b> A5  <b>Dimmer 7:</b> A6</p>	
	33489	DALI Lin* 8xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 8xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<p><b>Dimmer 1:</b> A0  <b>Dimmer 2:</b> A1  <b>Dimmer 3:</b> A2  <b>Dimmer 4:</b> A3  <b>Dimmer 5:</b> A4  <b>Dimmer 6:</b> A5  <b>Dimmer 7:</b> A6  <b>Dimmer 8:</b> A7</p>	
	34865	DALI Log 8xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 8xDimmers. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	<p><b>Dimmer 1:</b> A0  <b>Dimmer 2:</b> A1  <b>Dimmer 3:</b> A2  <b>Dimmer 4:</b> A3  <b>Dimmer 5:</b> A4  <b>Dimmer 6:</b> A5  <b>Dimmer 7:</b> A6  <b>Dimmer 8:</b> A7</p>	
	33490	DALI Lin* (1xGroup)		DALI/Elements{OHI,H WTemp}	DALI 1xGroup. Linear dimming curve. Controls DALI groups.	<b>Dimmer:</b> G0	
	34866	DALI Log (1xGroup)		DALI/Elements{OHI,H WTemp}	DALI 1xGroup. Logarithmic dimming curve. Controls DALI groups.	<b>Dimmer:</b> G0	


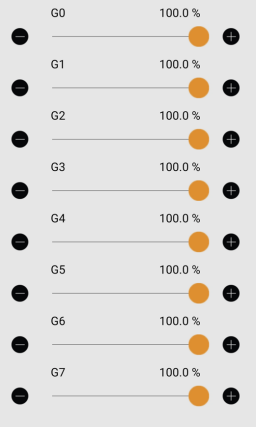

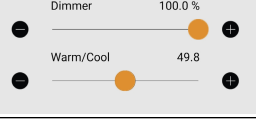

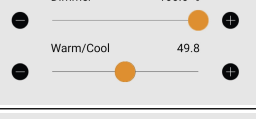

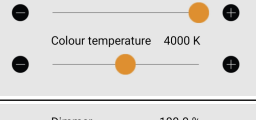

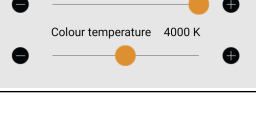

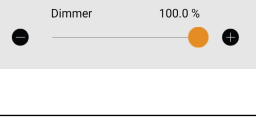

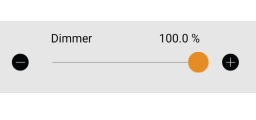

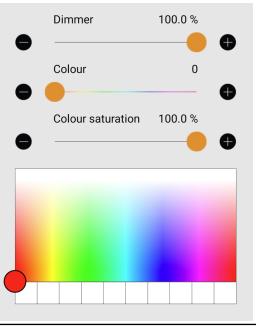

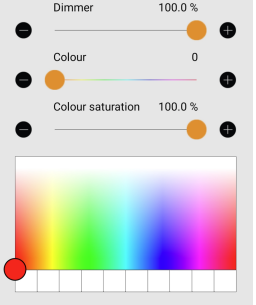


	33491	<b>DALI Lin* (2xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 2xGroup. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1	
	34867	<b>DALI Log (2xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 2xGroup. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1	
	33492	<b>DALI Lin* (3xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 3xGroup. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Dimmer 3:</b> G2	
	34868	<b>DALI Log (3xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 3xGroup. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Dimmer 3:</b> G2	
	33493	<b>DALI Lin* (4xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 4xGroup. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Dimmer 3:</b> G2 <b>Dimmer 4:</b> G3	
	34869	<b>DALI Log (4xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 4xGroup. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Dimmer 3:</b> G2 <b>Dimmer 4:</b> G3	
	33494	<b>DALI Lin* (5xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 5xGroup. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Dimmer 3:</b> G2 <b>Dimmer 4:</b> G3 <b>Dimmer 5:</b> G4	
	34870	<b>DALI Log (5xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 5xGroup. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Dimmer 3:</b> G2 <b>Dimmer 4:</b> G3 <b>Dimmer 5:</b> G4	



	33495	<b>DALI Lin* (6xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 6xGroup. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<p><b>Dimmer 1:</b> G0  <b>Dimmer 2:</b> G1  <b>Dimmer 3:</b> G2  <b>Dimmer 4:</b> G3  <b>Dimmer 5:</b> G4  <b>Dimmer 6:</b> G5</p> 
	34871	<b>DALI Log (6xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 6xGroup. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<p><b>Dimmer 1:</b> G0  <b>Dimmer 2:</b> G1  <b>Dimmer 3:</b> G2  <b>Dimmer 4:</b> G3  <b>Dimmer 5:</b> G4  <b>Dimmer 6:</b> G5</p> 
	33496	<b>DALI Lin* (7xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 7xGroup. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<p><b>Dimmer 1:</b> G0  <b>Dimmer 2:</b> G1  <b>Dimmer 3:</b> G2  <b>Dimmer 4:</b> G3  <b>Dimmer 5:</b> G4  <b>Dimmer 6:</b> G5  <b>Dimmer 7:</b> G6</p> 
	34872	<b>DALI Log (7xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 7xGroup. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<p><b>Dimmer 1:</b> G0  <b>Dimmer 2:</b> G1  <b>Dimmer 3:</b> G2  <b>Dimmer 4:</b> G3  <b>Dimmer 5:</b> G4  <b>Dimmer 6:</b> G5  <b>Dimmer 7:</b> G6</p> 
	33497	<b>DALI Lin* (8xGroup)</b>		DALI/Elements{OHI,H WTemp}	DALI 8xGroup. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<p><b>Dimmer 1:</b> G0  <b>Dimmer 2:</b> G1  <b>Dimmer 3:</b> G2  <b>Dimmer 4:</b> G3  <b>Dimmer 5:</b> G4  <b>Dimmer 6:</b> G5  <b>Dimmer 7:</b> G6  <b>Dimmer 8:</b> G7</p> 



34873	<b>DALI Log (8xGroup)</b>		DALI/Elements{OHI,HWTemp}	DALI 8xGroup. Logarithmic dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Controls DALI groups.	<p><b>Dimmer 1:</b> G0  <b>Dimmer 2:</b> G1  <b>Dimmer 3:</b> G2  <b>Dimmer 4:</b> G3  <b>Dimmer 5:</b> G4  <b>Dimmer 6:</b> G5  <b>Dimmer 7:</b> G6  <b>Dimmer 8:</b> G7</p>	
33498	<b>DALI Lin* DT6 TW Warm-Cool SA</b>		DALI/2ch/Dim,Vertical{OHI,HWTemp}	DALI DT6 Tunable white. Generic Warm / Cool slider (no CCT value data). Linear dimming curve. Automatic DALI addressing. Warm: address A0 Cool: address A1	<p><b>Dimmer:</b> A0+A1  <b>Warm/Cool:</b> Colour temperature mixer</p>	
34874	<b>DALI Log DT6 TW Warm-Cool SA</b>		DALI/2ch/Dim,Vertical{OHI,HWTemp}	DALI DT6 Tunable white. Generic Warm / Cool slider (no CCT value data). Logarithmic dimming curve. Automatic DALI addressing. Warm: address A0 Cool: address A1	<p><b>Dimmer:</b> A0+A1  <b>Warm/Cool:</b> Colour temperature mixer</p>	
33499	<b>DALI Lin* DT6 TW 3-5K SA</b>		DALI/2ch/Dim,TW{OHI,HWTemp}	DALI DT6 Tunable white. Linear dimming curve. Automatic DALI addressing. Warm: address A0 Cool: address A1	<p><b>Dimmer:</b> A0+A1  <b>Colour temperature:</b> Warm (3000K) / cool (5000k) mixer</p>	
34875	<b>DALI Log DT6 TW 3-5K SA</b>		DALI/2ch/Dim,TW{OHI,HWTemp}	DALI DT6 Tunable white. Logarithmic dimming curve. Automatic DALI addressing. Warm: address A0 Cool: address A1	<p><b>Dimmer:</b> A0+A1  <b>Colour temperature:</b> Warm (3000K) / cool (5000k) mixer</p>	
33500	<b>DALI Lin* DT6 Dim to Warm SA</b>		DALI/2ch/Dim{Warm Cool}{OHI,HWTemp}	DALI DT6 Dim to Warm. Single dimmer controlling both light intensity and color temperature. Light is warmer at low dimming levels and cooler at higher brightness levels. Linear dimming curve. Automatic DALI addressing. Warm: address A0 Cool: address A1	<p><b>Dimmer:</b> A0+A1</p>	
34876	<b>DALI Log DT6 Dim to Warm SA</b>		DALI/2ch/Dim{Warm Cool}{OHI,HWTemp}	DALI DT6 Dim to Warm. Single dimmer controlling both light intensity and color temperature. Light is warmer at low dimming levels and cooler at higher brightness levels. Logarithmic dimming curve. Automatic DALI addressing. Warm: address A0 Cool: address A1	<p><b>Dimmer:</b> A0+A1</p>	
33501	<b>DALI Lin* DT6 RGB SA</b>		DALI/3ch/Dim,RGB{OHI,HWTemp}	DALI DT6 RGB. Linear dimming curve. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2	<p><b>Dimmer:</b> Red/green/blue/dimming control  <b>Colour:</b> Red/green/blue mixer  <b>Colour saturation:</b> Grade of purity of the current color  <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)  <b>Saved colours:</b> Up to 10</p>	
34877	<b>DALI Log DT6 RGB SA</b>		DALI/3ch/Dim,RGB{OHI,HWTemp}	DALI DT6 RGB. Logarithmic dimming curve. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2	<p><b>Dimmer:</b> Red/green/blue/dimming control  <b>Colour:</b> Red/green/blue mixer  <b>Colour saturation:</b> Grade of purity of the current color  <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)  <b>Saved colours:</b> Up to 10</p>	



33502	<b>DALI Lin* DT6 RGBW SA</b>		DALI/4ch/Dim,RGBW {OHI,HWTemp}	DALI DT6 RGBW. Linear dimming curve. Dedicated slider for White. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White: address A3	<p><b>Dimmer:</b> Red/green/blue/white dimming control</p> <p><b>White:</b> White channel dimming control</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
34878	<b>DALI Log DT6 RGBW SA</b>		DALI/4ch/Dim,RGBW {OHI,HWTemp}	DALI DT6 RGBW. Logarithmic dimming curve. Dedicated slider for White. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White: address A3	<p><b>Dimmer:</b> Red/green/blue/white dimming control</p> <p><b>White:</b> White channel dimming control</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
33503	<b>DALI Lin* DT6 RGB/W SA</b>		DALI/4ch/Dim,RGB/White{OHI,HWTemp}	DALI DT6 RGB/W. Linear dimming curve. White/Colour balance control. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White: address A3	<p><b>Dimmer:</b> Red/green/blue/white dimming control</p> <p><b>White/Colour:</b> Balance between the white channel and the RGB mix</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
34879	<b>DALI Log DT6 RGB/W SA</b>		DALI/4ch/Dim,RGB/White{OHI,HWTemp}	DALI DT6 RGB/W. Logarithmic dimming curve. White/Colour balance control. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White: address A3	<p><b>Dimmer:</b> Red/green/blue/white dimming control</p> <p><b>White/Colour:</b> Balance between the white channel and the RGB mix</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
33504	<b>DALI Lin* DT6 RGB/W+dW SA</b>		DALI/4ch/Dim,RGB/White{OHI,HWTemp}	DALI DT6 RGB/W with additional White2 channel. Linear dimming curve. White1/Colour balance slider + Dedicated slider for additional White2 channel. White2 channel control won't be affected by top Dimmer slider, but it's level will be overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White1 (White/colour slider): address A3 White2 (semi-independent slider): address A4	<p><b>Dimmer:</b> Red/green/blue/white 1 dimming control (doesn't affect white2 channel)</p> <p><b>White1/Colour:</b> Balance between the white1 channel and the RGB mix</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect white1 or white2 channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p> <p><b>White2:</b> White 2 channel dimming control</p>	



	34880	<b>DALI Log DT6 RGB/W+dW SA</b>		DALI/4ch/Dim,RGB/White{OHI,HWTemp}	DALI DT6 RGB/W with additional White2 channel. Logarithmic dimming curve. White1/Colour balance slider + Dedicated slider for additional White2 channel. White2 channel control won't be affected by top Dimmer slider, but it's level will be overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White1 (White/colour slider): address A3 White2 (semi-independent slider): address A4	<b>Dimmer:</b> Red/green/blue/white 1 dimming control (doesn't affect white2 channel) <b>White1/Colour:</b> Balance between the white1 channel and the RGB mix <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color (doesn't affect white1 or white2 channel) <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10 <b>White2:</b> White 2 channel dimming control	
	33505	<b>DALI Lin* DT6 RGB/W+W SA</b>		DALI/5ch/Dim,RGB/W+W{Evolution}{OHI,HWTemp}	DALI DT6 RGB/W with additional White channel. Linear dimming curve. White/Colour balance slider + Dedicated slider for additional White channel. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White (White/colour slider): address A3 White (independent slider): address A4	<b>Dimmer:</b> Red/green/blue/2whites dimming control <b>White:</b> White channel dimming control (A4) <b>White/Colour:</b> Balance between the white channel (A3) and the RGB mix <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channels) <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10	
	34881	<b>DALI Log DT6 RGB/W+W SA</b>		DALI/5ch/Dim,RGB/W+W{Evolution}{OHI,HWTemp}	DALI DT6 RGB/W with additional White channel. Logarithmic dimming curve. White/Colour balance slider + Dedicated slider for additional White channel. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White (White/colour slider): address A3 White (independent slider): address A4	<b>Dimmer:</b> Red/green/blue/2whites dimming control <b>White:</b> White channel dimming control (A4) <b>White/Colour:</b> Balance between the white channel (A3) and the RGB mix <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channels) <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10	
DALI DT8	33506	<b>DALI Lin* DT8 TW 3-5K BC</b>		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Broadcast. Linear dimming curve.	<b>Dimmer:</b> BC <b>Colour temperature:</b> Warm (3000K) / cool (5000K) mixer	
	34883	<b>DALI Log DT8 TW 3-5K BC</b>		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Broadcast. Logarithmic dimming curve.	<b>Dimmer:</b> BC <b>Colour temperature:</b> Warm (3000K) / cool (5000K) mixer	
	33507	<b>DALI Lin* DT8 TW 2.7-6K BC</b>		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Broadcast. Linear dimming curve.	<b>Dimmer:</b> BC <b>Colour temperature:</b> Warm (2700K) / cool (6000K) mixer	
	34884	<b>DALI Log DT8 TW 2.7-6K BC</b>		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Broadcast. Logarithmic dimming curve.	<b>Dimmer:</b> BC <b>Colour temperature:</b> Warm (2700K) / cool (6000K) mixer	





33508	<b>DALI Lin* DT8 TW 2.2-7K BC</b>		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Broadcast. Linear dimming curve.	<b>Dimmer:</b> BC <b>Colour temperature:</b> Warm (2200K) / cool (7000K) mixer	
34885	<b>DALI Log DT8 TW 2.2-7K BC</b>		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Broadcast. Logarithmic dimming curve.	<b>Dimmer:</b> BC <b>Colour temperature:</b> Warm (2200K) / cool (7000K) mixer	
33509	<b>DALI Lin* DT8 TW 2.7-6.5K (2xSA)</b>		DALI/DT8/2x{Dim,TW}[Evolution]{OHI,HWT emp}	DALI DT8 Tunable white. 2x Short address. Individual sliders for controlling dimmer and colour temperature of each address. Individual slider levels are overwritten when dimmed by sliding on the App icon. Linear dimming curve. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Colour temperature 1:</b> A0 warm (2700K) / cool (6500K) mixer <b>Colour temperature 2:</b> A1 warm (2700K) / cool (6500K) mixer	
34886	<b>DALI Log DT8 TW 2.7-6.5K (2xSA)</b>		DALI/DT8/2x{Dim,TW}[Evolution]{OHI,HWT emp}	DALI DT8 Tunable white. 2x Short address. Individual sliders for controlling dimmer and colour temperature of each address. Individual slider levels are overwritten when dimmed by sliding on the App icon. Logarithmic dimming curve. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Colour temperature 1:</b> A0 warm (2700K) / cool (6500K) mixer <b>Colour temperature 2:</b> A1 warm (2700K) / cool (6500K) mixer	
33510	<b>DALI Lin* DT8 TW 2.7-6.5K (3xSA)</b>		DALI/DT8/Dim,Dim,Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. 3x Short address. Individual sliders for controlling dimmer level of each address. Common colour temperature slider for all addresses. Individual slider levels are overwritten when dimmed by sliding on the App icon. Linear dimming curve. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Colour temperature:</b> A0+A1+A2 warm (2700K) / cool (6500K) mixer	
34887	<b>DALI Log DT8 TW 2.7-6.5K (3xSA)</b>		DALI/DT8/Dim,Dim,Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. 3x Short address. Individual sliders for controlling dimmer level of each address. Common colour temperature slider for all addresses. Individual slider levels are overwritten when dimmed by sliding on the App icon. Logarithmic dimming curve. Automatic DALI addressing.	<b>Dimmer 1:</b> A0 <b>Dimmer 2:</b> A1 <b>Dimmer 3:</b> A2 <b>Colour temperature:</b> A0+A1+A2 warm (2700K) / cool (6500K) mixer	
33511	<b>DALI Lin* DT8 TW 2.7-6.5K (2xGroup)</b>		DALI/DT8/2x{Dim,TW}[Evolution]{OHI,HWT emp}	DALI DT8 Tunable white. 2x Group. Individual sliders for controlling dimmer and colour temperature of each group. Individual slider levels are overwritten when dimmed by sliding on the App icon. Linear dimming curve. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Colour temperature 1:</b> G0 warm (2700K) / cool (6500K) mixer <b>Colour temperature 2:</b> G1 warm (2700K) / cool (6500K) mixer	
34888	<b>DALI Log DT8 TW 2.7-6.5K (2xGroup)</b>		DALI/DT8/2x{Dim,TW}[Evolution]{OHI,HWT emp}	DALI DT8 Tunable white. 2x Group. Individual sliders for controlling dimmer and colour temperature of each group. Individual slider levels are overwritten when dimmed by sliding on the App icon. Logarithmic dimming curve. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Colour temperature 1:</b> G0 warm (2700K) / cool (6500K) mixer <b>Colour temperature 2:</b> G1 warm (2700K) / cool (6500K) mixer	
33512	<b>DALI Lin* DT8 TW 2.7-6.5K (3xGroup)</b>		DALI/DT8/Dim,Dim,Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. 3x Group. Individual sliders for controlling dimmer level of each group. Common colour temperature slider for all groups. Individual slider levels are overwritten when dimmed by sliding on the App icon. Linear dimming curve. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Dimmer 3:</b> G2 <b>Colour temperature:</b> G0+G1+G2 warm (2700K) / cool (6500K) mixer	


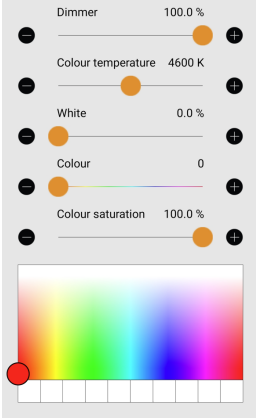

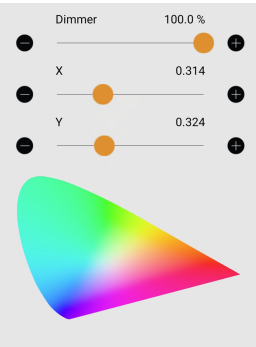

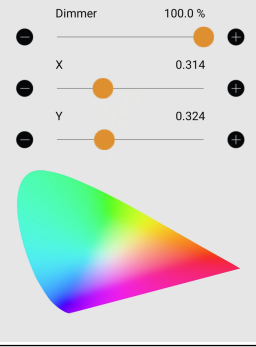

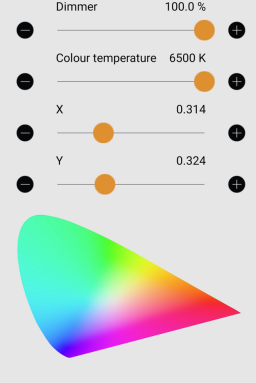




34889	<b>DALI Log DT8 TW 2.7-6.5K (3xGroup)</b>		DALI/DT8/Dim,Dim,Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. 3x Group. Individual sliders for controlling dimmer level of each group. Common colour temperature slider for all groups. Individual slider levels are overwritten when dimmed by sliding on the App icon. Logarithmic dimming curve. Controls DALI groups.	<b>Dimmer 1:</b> G0 <b>Dimmer 2:</b> G1 <b>Dimmer 3:</b> G2 <b>Colour temperature:</b> G0+G1+G2 warm (2700K) / cool (6500K) mixer	
33513	<b>DALI Lin* DT8 Dim to Warm BC</b>		DALI/DT8/Dim{Warm Cool}{OHI,HWTemp}	DALI DT8 Dim to Warm. Broadcast. Single dimmer controlling both light intensity and color temperature. Light is warmer at low dimming levels and cooler at higher brightness levels. Linear dimming curve.	<b>Dimmer:</b> BC	
34890	<b>DALI Log DT8 Dim to Warm BC</b>		DALI/DT8/Dim{Warm Cool}{OHI,HWTemp}	DALI DT8 Dim to Warm. Broadcast. Single dimmer controlling both light intensity and color temperature. Light is warmer at low dimming levels and cooler at higher brightness levels. Logarithmic dimming curve.	<b>Dimmer:</b> BC	
33514	<b>DALI Lin* DT8 RGB BC</b>		DALI/DT8/Dim,RGB{OHI,HWTemp}	DALI DT8 RGB. Broadcast. Linear dimming curve.	<b>Dimmer:</b> Red/green/blue dimming control <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10	
34891	<b>DALI Log DT8 RGB BC</b>		DALI/DT8/Dim,RGB{OHI,HWTemp}	DALI DT8 RGB. Broadcast. Logarithmic dimming curve.	<b>Dimmer:</b> Red/green/blue dimming control <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10	
33515	<b>DALI Lin* DT8 RGBW BC</b>		DALI/DT8/Dim,RGBW{OHI,HWTemp}	DALI DT8 RGBW. Broadcast. Linear dimming curve.	<b>Dimmer:</b> Red/green/blue/white dimming control <b>White:</b> White channel dimming control <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel) <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10	
34892	<b>DALI Log DT8 RGBW BC</b>		DALI/DT8/Dim,RGBW{OHI,HWTemp}	DALI DT8 RGBW. Broadcast. Logarithmic dimming curve.	<b>Dimmer:</b> Red/green/blue/white dimming control <b>White:</b> White channel dimming control <b>Colour:</b> Red/green/blue mixer <b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel) <b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical) <b>Saved colours:</b> Up to 10	






33516	<b>DALI Lin* DT8 RGB/W BC</b>		DALI/DT8/Dim,RGB/White[Evolution]{OHi,HWTemp}	DALI DT8 RGB/W. Broadcast. Linear dimming curve. White/Colour balance slider.	<p><b>Dimmer:</b> Red/green/blue/white dimming control</p> <p><b>White/Colour:</b> Balance between the white channel and the RGB mix</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
34893	<b>DALI Log DT8 RGB/W BC</b>		DALI/DT8/Dim,RGB/White[Evolution]{OHi,HWTemp}	DALI DT8 RGB/W. Broadcast. Logarithmic dimming curve. White/Colour balance slider.	<p><b>Dimmer:</b> Red/green/blue/white dimming control</p> <p><b>White/Colour:</b> Balance between the white channel and the RGB mix</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect the white channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
33517	<b>DALI Lin* DT8 RGB/TW BC</b>		DALI/DT8/Dim,RGB,TW{OHi,HWTemp}	DALI DT8 RGB/TW. Broadcast. Linear dimming curve.	<p><b>Dimmer:</b> Red/green/blue/warm/cool dimming control</p> <p><b>Colour temperature:</b> Warm (2700K) / cool (6500K) mixer</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect warm or cool channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
34894	<b>DALI Log DT8 RGB/TW BC</b>		DALI/DT8/Dim,RGB,TW{OHi,HWTemp}	DALI DT8 RGB/TW. Broadcast. Logarithmic dimming curve.	<p><b>Dimmer:</b> Red/green/blue/warm/cool dimming control</p> <p><b>Colour temperature:</b> Warm (2700K) / cool (6500K) mixer</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect warm or cool channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
33518	<b>DALI Lin* DT8 RGBW/TW BC</b>		DALI/DT8/Dim,RGBW,TW[Evolution]{OHi,HWTemp}	DALI DT8 RGBW/TW. Broadcast. Linear dimming curve.	<p><b>Dimmer:</b> Red/green/blue/white/warm/cool dimming control</p> <p><b>Colour temperature:</b> Warm (2700K) / cool (6500K) mixer</p> <p><b>White:</b> White channel dimming control</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect white, warm or cool channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	



34895	<b>DALI Log DT8 RGBW/TW BC</b>		DALI/DT8/Dim,RGBW ,TW[Evolution]{OHI,H WTemp}	DALI DT8 RGBW/TC. Broadcast. Logarithmic dimming curve.	<p><b>Dimmer:</b> Red/green/blue/white /warm/cool dimming control</p> <p><b>Colour temperature:</b> Warm (2700K) / cool (6500K) mixer</p> <p><b>White:</b> White channel dimming control</p> <p><b>Colour:</b> Red/green/blue mixer</p> <p><b>Colour saturation:</b> Grade of purity of the current color (doesn't affect white, warm or cool channel)</p> <p><b>Palette:</b> Red/green/blue mix (horizontal) + saturation (vertical)</p> <p><b>Saved colours:</b> Up to 10</p>	
33519	<b>DALI Lin* DT8 XY BC</b>		DALI/DT8/Dim,XY [Evolution]{OHI,HWT emp}	DALI DT8 XY. Broadcast. Linear dimming curve.	<p><b>Dimmer:</b> BC</p> <p><b>X:</b> Colour based on "x" coordinate</p> <p><b>Y:</b> Colour based on "y" coordinate</p> <p><b>XY Palette:</b> Red/green/blue mix based on "x, y" coordinates</p>	
34896	<b>DALI Log DT8 XY BC</b>		DALI/DT8/Dim,XY [Evolution]{OHI,HWT emp}	DALI DT8 XY. Broadcast. Logarithmic dimming curve.	<p><b>Dimmer:</b> BC</p> <p><b>X:</b> Colour based on "x" coordinate</p> <p><b>Y:</b> Colour based on "y" coordinate</p> <p><b>XY Palette:</b> Red/green/blue mix based on "x, y" coordinates</p>	
33520	<b>DALI Lin* DT8 XY/TW BC</b>		DALI/DT8/Dim,XY,TW [Evolution]{OHI,HWT emp}	DALI DT8 XY/TC. Broadcast. Linear dimming curve.	<p><b>Dimmer:</b> BC</p> <p><b>Colour temperature:</b> Warm (2700K) / cool (6500K) mixer</p> <p><b>X:</b> Colour based on "x" coordinate</p> <p><b>Y:</b> Colour based on "y" coordinate</p> <p><b>XY Palette:</b> Red/green/blue mix based on "x, y" coordinates</p>	
34897	<b>DALI Log DT8 XY/TW BC</b>		DALI/DT8/Dim,XY,TW [Evolution]{OHI,HWT emp}	DALI DT8 XY/TC. Broadcast. Logarithmic dimming curve.	<p><b>Dimmer:</b> BC</p> <p><b>Colour temperature:</b> Warm (2700K) / cool (6500K) mixer</p> <p><b>X:</b> Colour based on "x" coordinate</p> <p><b>Y:</b> Colour based on "y" coordinate</p> <p><b>XY Palette:</b> Red/green/blue mix based on "x, y" coordinates</p>	



<b>Misc.</b>	33521	<b>DALI Gateway</b>		DALI Gateway{OHl,HWTemp,DALIPB}	Gateway between a wired DALI line and a wireless Casambi network.	-	It appears under "Gateways" tab.
	33522	<b>Push Button</b>		PushButton{OHl,HWTemp}	Push button fixture. It doesn't appear under Lamps tab. A single low voltage push button should be wired to the <b>PUSH</b> terminals.	-	It appears under "Switches" tab.  <div style="border: 1px solid #ccc; padding: 5px; margin: 5px 0;">                     PUSH BUTTONS  <span style="display: inline-block; width: 15px; height: 10px; background-color: #8bc34a; margin-right: 5px;"></span> PUSH    Not in use    &gt;                 </div> Controls what happens when a push button is used.
	33523	<b>Push Button x2</b>		PushButton{OHl,HWTemp}	2xPush button fixture. It doesn't appear under Lamps tab. Two low voltage push buttons can be connected. First push button should be wired to the <b>PUSH</b> terminals. Second push button should be wired to the DALI ( <b>DA+</b> / <b>DA-</b> ) terminals.	-	It appears under "Switches" tab.  <div style="border: 1px solid #ccc; padding: 5px; margin: 5px 0;">                     PUSH BUTTONS  <span style="display: inline-block; width: 15px; height: 10px; background-color: #8bc34a; margin-right: 5px;"></span> PUSH    Not in use    &gt;                 </div> <div style="border: 1px solid #ccc; padding: 5px; margin: 5px 0;"> <span style="display: inline-block; width: 15px; height: 10px; background-color: #9c27b0; margin-right: 5px;"></span> DALI    Not in use    &gt;                 </div> Controls what happens when a push button is used.

\*\* Default profile

### Additional information

Summary of some terms and abbreviations that have been used throughout the document.

Abbreviation:	Description:
A0, A1, A2, ...	DALI short address.
G0, G1, G2, ...	DALI group address.
BC	Broadcast.
SA	Short Address.
Lin*	Optimized linear dimming curve.
Log	Logarithmic dimming curve.



**Revision history**

Date:	Version:	Description:
16/01/2024	1.0	Initial release.
19/03/2024	1.1	Added logarithmic fixtures.