



P-DUKE
POWER



DOS16-12T • DOH16-12T Series

DC-DC Converter
Up to 16 Amps

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

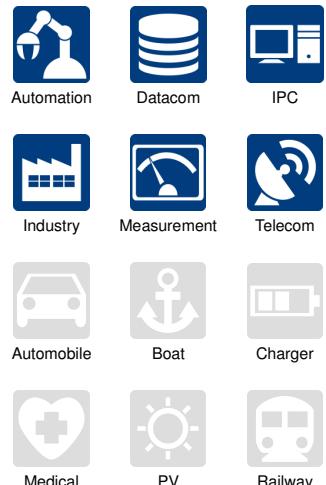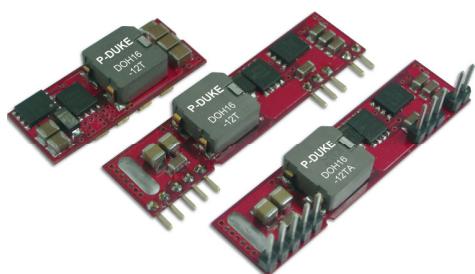

cUL[®] us CB CE



PART NUMBER STRUCTURE

DOS16 -	12	T	-	P
Series Name	Input Voltage (VDC)	Package		Remote Control Option
DOS16: SMD TYPE DOH16: SIP TYPE	12: 8.3~14	SMD TYPE SIP TYPE TA: Horizontal Mounting SIP	T: No Assembly T: Vertical Mounting SIP	N: Negative Logic P: Positive Logic

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current Vin(nom) @ No Load	Efficiency Vin(nom),3.3VDC @Full Load	Maximum Capacitor Load
	VDC	VDC	A	mA	%	ESR \geq 1mΩ / ESR \geq 10mΩ μF
DOS16-12T						
DOS16-12T-P	Vout(set) \leq 3.63					
DOH16-12T	Vin = 8.3 ~ 14					
DOH16-12T-P		0.75 ~ 5	16	40 / 100	92	1000 / 5000
DOH16-12TA	Vout(set) $>$ 3.63					
DOH16-12TA-P	Vin = 8.3 ~ 13.2					

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	Vout(set) \leq 3.63VDC Vout(set) $>$ 3.63VDC	8.3	12	14	VDC
Maximum input current	Vin=8.3 to 14VDC, Io=Io(max.)	8.3	12	13.2	A
Start up voltage			10		8.3 VDC
Shutdown voltage		6.5	7.5	8	VDC
Input filter	*It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C _{in} is 6pcs of 47μF ceramic capacitors at least.				Capacitor type

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy	% of Vout(set)	-2.0	+2.0	%	
Line regulation	Vin=Vin(min.) to Vin(max.) at Full Load	-0.3	+0.3	%	
Load regulation	No Load to Full Load	-0.4	+0.4	%	
Voltage adjustability		0.7525	5	VDC	
Ripple and noise	Measured by 20MHz bandwidth,with a 1μF MLCC & a 10μF T/C		30 75	mVrms mVp-p	
Temperature coefficient		-0.4	+0.4	%/°C	
Dynamic load response	With a 1μF MLCC & a 10μF T/C △Io/△t=2.5A/μs,Vin(nom) 50% load step change Peak deviation Setting time(Vout<10%peak deviation)		200 25	mV μs	
	With 2pcs of 150μF polymer capacitors △Io/△t=2.5A/μs,Vin(nom) 50% load step change Peak deviation Setting time(Vout<10%peak deviation)		100 50	mV μs	
Over load protection	% of Iout rated		180	%	
Short circuit protection			Continuous, automatics recovery		
Output voltage overshoot-startup	Vin= Vin(min.) to Vin(max.) at Full Load		1.0	%	

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage				None	
Switching frequency		270	300	330	kHz
Safety approvals	IEC/ UL/ EN60950-1			UL:E193009 CB:UL(Demko)	
Weight				6.0g (0.21oz)	
MTBF	MIL-HDBK-217F, Full load			3.416 x 10 ⁶ hrs	

ENVIRONMENTAL SPECIFICATIONS




Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40	+85		°C
Over temperature protection			125		°C
Storage temperature range		-55	+125		°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity(non-condensing)				5% to 95% RH	
Lead-free reflow solder process				IPC J-STD-020D	
Moisture sensitivity level(MSL)				IPC J-STD-033B Level 2a	

FEATURE SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Remote ON/OFF	Referred to GND pin Negative logic (Standard) DC-DC ON Positive logic (Option) DC-DC ON Input current of Ctrl pin Remote off input current	0.01	Open or 0 ~ 0.3VDC 2.5VDC ~ Vin(max.) Open or (Vin-4) ~ Vin(max.) 0 ~ 0.3VDC 2.0	0.5 1.0	mA mA
	*Positive logic:ON/OFF is open collector/drain logic input Negative logic:ON/OFF pin is open collector/drain logic input with external pull –up resistor				
Remote sense range				0.5	VDC
Rise time	Time for Vout to rise from 10% to 90%of Vout(set)			6	ms
Turn-on delay time	Case 1, Case 2 *Case 1: ON/OFF input is set to logic low (module on) and then input power is applied (delay from instant at which Vin=Vin(min.) until Vout=10% of Vout(set)) *Case 2:Input power is applied for at least one second and then the ON/OFF input is set to logic low (delay form instant at which Von/off=0.3VDC until Vout=10% of Vout(set))			3	ms

CAUTION: This power module is not internally fused. An input line fuse must always be used.

CHARACTERISTIC CURVE

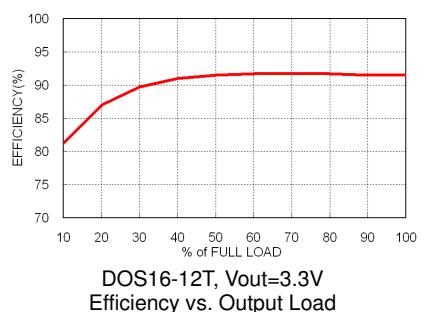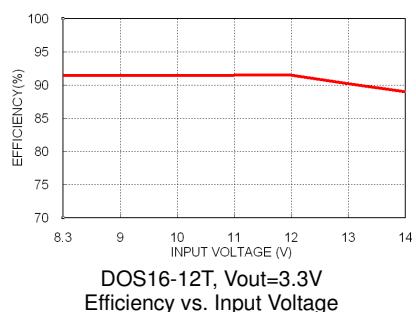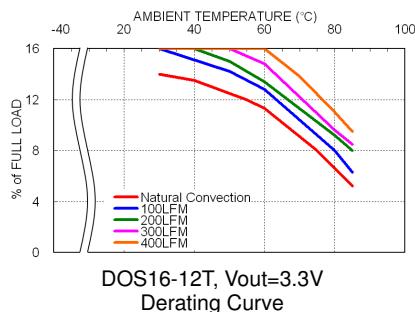

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The input line fuse suggest as below :


Model	Fuse Rating (A)	Fuse Type
DOS16-12T□□□	15	Fast-Acting
DOH16-12T□□□	15	Fast-Acting

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.



MECHANICAL DRAWING

DOS16-12T

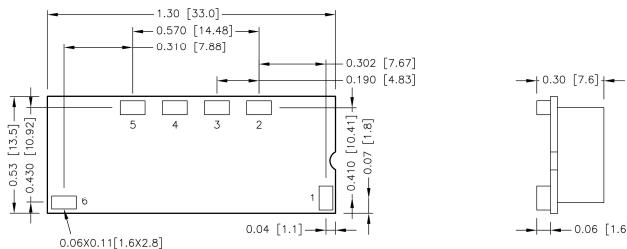


BOTTOM VIEW

PIN CONNECTION

PIN	DEFINE
1	Ctrl
2	+Sense
3	Trim
4	+Vout
5	GND
6	+Vin

DOH16-12T

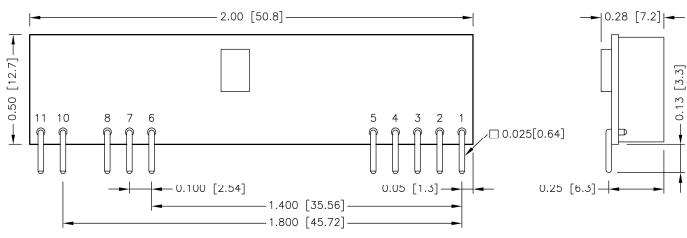


BOTTOM VIEW

PIN CONNECTION

PIN	DEFINE
1	+Vout
2	+Vout
3	+Sense
4	+Vout
5	GND
6	GND
7	+Vin
8	+Vin
10	Trim
11	Ctrl

DOH16-12TA

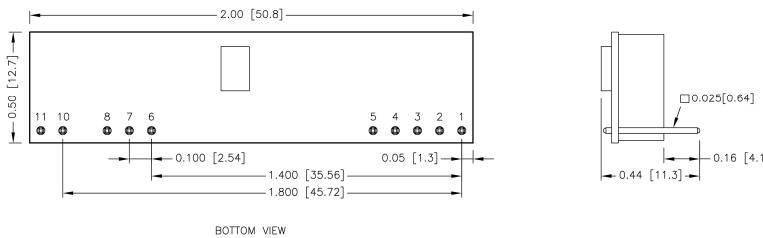

BOTTOM VIEW

PIN CONNECTION


PIN	DEFINE
1	+Vout
2	+Vout
3	+Sense
4	+Vout
5	GND
6	GND
7	+Vin
8	+Vin
10	Trim
11	Ctrl

1. All dimensions in inch [mm]
2. Tolerance $x.x\pm 0.02$ [$x.x\pm 0.5$]
 $x.x\pm 0.01$ [$x.x\pm 0.25$]
3. Pin pitch tolerance ± 0.01 [0.25]
4. Pin dimension tolerance ± 0.004 [0.10]




RECOMMENDED PAD LAYOUT

DOS16-12T

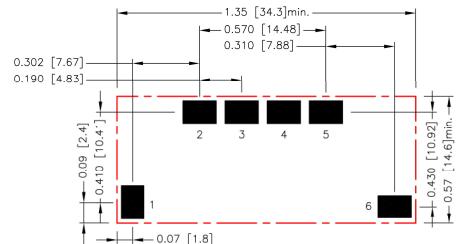


All dimensions in inch[mm]
Pad size(lead free recommended)
Top view pad 1.2.3.4.5.6:0.150x0.102[3.80x2.60]

DOH16-12T

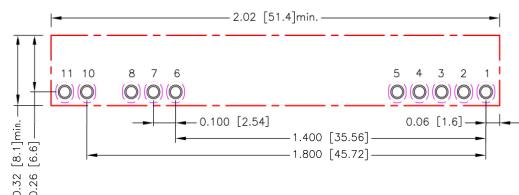

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.4.5.6.7.8.10.11: $\Phi 0.047$ [1.20]
Top view pad 1.2.3.4.5.6.7.8.10.11: $\Phi 0.059$ [1.50]
Bottom view pad 1.2.3.4.5.6.7.8.10.11:
Groove R0.040[1.02]L-0.094[2.40]

DOH16-12TA

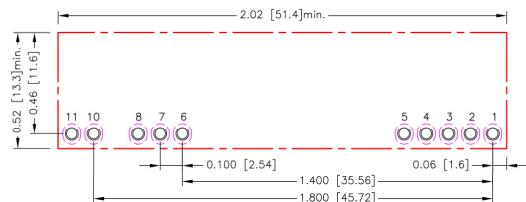

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.4.5.6.7.8.10.11: $\Phi 0.047$ [1.20]
Top view pad 1.2.3.4.5.6.7.8.10.11: $\Phi 0.059$ [1.50]
Bottom view pad 1.2.3.4.5.6.7.8.10.11:
Groove R0.040[1.02]L-0.094[2.40]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.

Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed 115°C.


When Operating, adequate cooling must be provided to maintain the test point temperature at or below 115°C.

Although the maximum point Temperature of the power modules is 115°C, you can limit this Temperature to a lower value for extremely high reliability. The unit will shutdown if the thermal reference point exceeds 125°C (typical), but the thermal shutdown is not intended as a guarantee that the unit will survive temperature beyond its rating.

The module will automatically restart after it cools down.


- Thermal test condition with vertical direction by natural convection (20LFM).

DOS16-12T

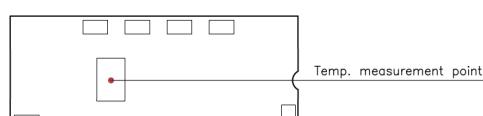

BOTTOM VIEW

DOH16-12T

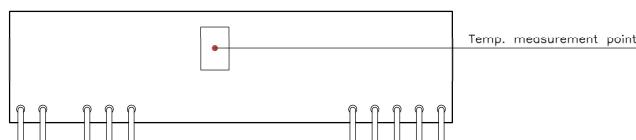

BOTTOM VIEW

DOH16-12TA




BOTTOM VIEW

OUTPUT VOLTAGE PROGRAMMING

Output voltage programmable from 0.7525V to 5V by connecting a single resistor (shown as Trim Table) between the Trim and GND pins of the module. To calculate the value of the resistor Rtrim for a particular output voltage Vout, use the following equation:

■ **Rtrim Equation :** $R_{trim} = \left[\frac{10500}{V_{out} - 0.7525} - 1000 \right] \Omega$

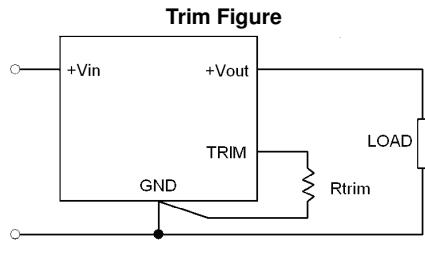

Trim Table

Vout(set) (VDC)	Rtrim (kΩ)
0.7525	Open
1.2	22.46
1.5	13.05
1.8	9.024
2.5	5.009
3.3	3.122
5	1.472