



P-DUKE
POWER



DOS06-05T • DOH06-05T Series

DC-DC Converter
Up to 6 Amps

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

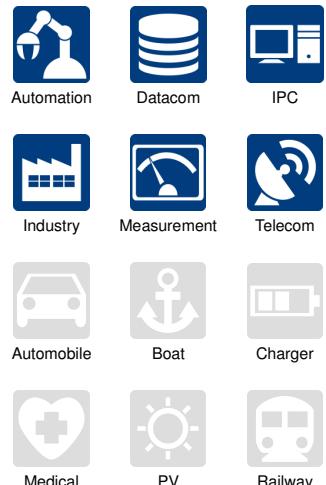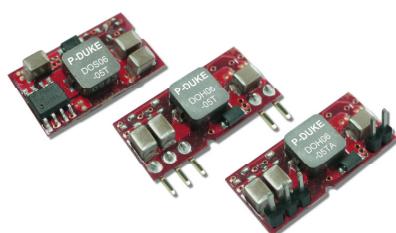

cUL[®] us CB CE



PART NUMBER STRUCTURE

DOS06	05	T	P
Series Name	Input Voltage (VDC)	Package	Remote Control Option
DOS06: SMD TYPE DOH06: SIP TYPE	05: 2.4~5.5 SMD TYPE SIP TYPE	T: No Assembly T: Vertical Mounting SIP TA: Horizontal Mounting SIP	□: Negative Logic P: Positive Logic

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current Vin(nom) @ No Load	Efficiency Vin(nom),3.3VDC @Full Load	Maximum Capacitor Load
	VDC	VDC	A	mA	%	μF
DOS06-05T						
DOS06-05T-P						
DOH06-05T	2.4 ~ 5.5	0.75 ~ 3.3	6	20 / 45	94	1000 / 3000
DOH06-05T-P	Vin(min.)=Vout(set)+0.5					
DOH06-05TA						
DOH06-05TA-P						

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	Vout(set) < Vin-0.5VDC	2.4	5	5.5	VDC
Maximum input current	Vin=Vin(min.), Vout(set)=3.3VDC, Io=Io(max.)		6		A
Start up voltage				2.4	VDC
Shutdown voltage		1.6	2.0	2.2	VDC
Input filter	*It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C _{in} is 2pcs of 150μF low-ESR polymer capacitors // 2pcs of 47μF ceramic capacitors at least.				Capacitor type

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy	% of Vout(set)	-2.0	+2.0	%	
Line regulation	Vin=Vout(set)+0.5VDC to Vin(max.) at Full Load	-0.3	+0.3	%	
Load regulation	No Load to Full Load	-0.4	+0.4	%	
Voltage adjustability		0.7525	3.63	VDC	
Ripple and noise	Measured by 20MHz bandwidth, with a 1μF MLCC & a 10μF T/C		20 50	mVrms mVp-p	
Temperature coefficient		-0.4	+0.4	%/°C	
Dynamic load response	With a 1μF MLCC & a 10μF T/C △ Io/△t=2.5A/μs,Vin(nom) 50% load step change Peak deviation Setting time(Vout<10%peak deviation)		130 25	mV μs	
	With 2pcs of 150μF polymer capacitors △ Io/△t=2.5A/μs,Vin(nom) 50% load step change Peak deviation Setting time(Vout<10%peak deviation)		50 50	mV μs	
Over load protection	% of Iout rated		220	%	
Short circuit protection				Continuous, automatics recovery	
Output voltage overshoot-startup	Vin=2.4~5.5VDC at Full Load		1.0	%	

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage				None	
Switching frequency		270	300	330	kHz
Safety approvals	IEC/ UL/ EN60950-1			UL:E193009 CB:UL(Demko)	
Weight				2.8g (0.1oz)	
MTBF	MIL-HDBK-217F, Full load			9.398 x 10 ⁶ hrs	




ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+85	°C
Over temperature protection				135	°C
Storage temperature range		-55		+125	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity(non-condensing)				5% to 95% RH	
Lead-free reflow solder process				IPC J-STD-020D	
Moisture sensitivity level(MSL)				IPC J-STD-033B Level 2a	

FEATURE SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Remote ON/OFF	Referred to GND pin Negative logic DC-DC ON (Standard) DC-DC OFF Positive logic DC-DC ON (Option) DC-DC OFF Input current of Ctrl pin Remote off input current	0.01	0.6	1.0	mA mA
	*Positive logic:ON/OFF is open collector/drain logic input Negative logic:ON/OFF pin is open collector/drain logic input with external pull-up resistor				
Rise time	Time for Vout to rise from 10% to 90% of Vout(set)			6	ms
Turn-on delay time	Case 1, Case 2 *Case 1: ON/OFF input is set to logic low (module on) and then input power is applied (delay from instant at which Vin=Vin(min.) until Vout=10% of Vout(set)) *Case 2: Input power is applied for at least one second and then the ON/OFF input is set to logic low (delay from instant at which Von/off=0.3VDC until Vout=10% of Vout(set))			1	ms

CAUTION: This power module is not internally fused. An input line fuse must always be used.

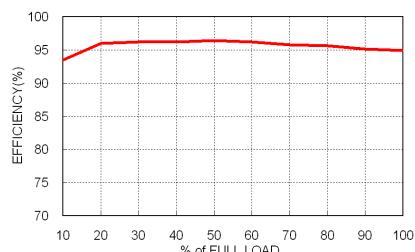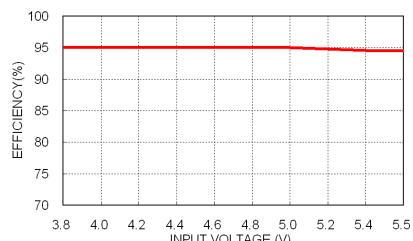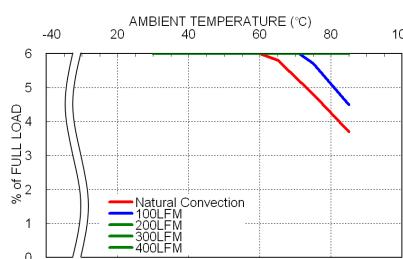CHARACTERISTIC CURVE


FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
DOS06-05T□□□	8	Fast-Acting
DOH06-05T□□□	8	Fast-Acting

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

DOS06-05T

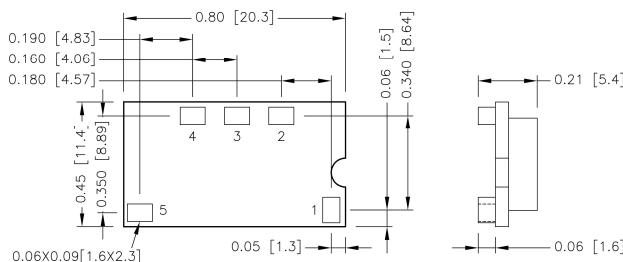


BOTTOM VIEW

PIN CONNECTION

PIN	DEFINE
1	Ctrl
2	+Vout
3	Trim
4	GND
5	+Vin

DOH06-05T

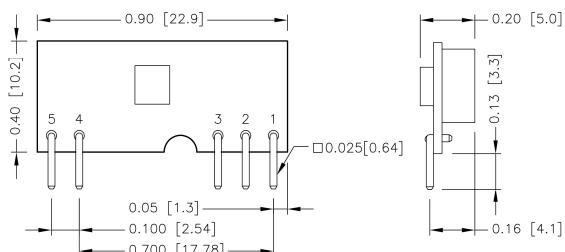


BOTTOM VIEW

PIN CONNECTION

PIN	DEFINE
1	+Vout
2	Trim
3	GND
4	+Vin
5	Ctrl

DOH06-05TA

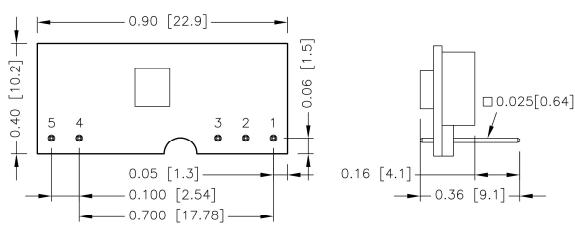

BOTTOM VIEW

PIN CONNECTION


PIN	DEFINE
1	+Vout
2	Trim
3	GND
4	+Vin
5	Ctrl

1. All dimensions in inch [mm]
2. Tolerance : $x.x\pm 0.02$ [$x.x\pm 0.5$]
 $x.x\pm 0.01$ [$x.x\pm 0.25$]
3. Pin pitch tolerance ± 0.01 [0.25]
4. Pin dimension tolerance ± 0.004 [0.10]




RECOMMENDED PAD LAYOUT

DOS06-05T

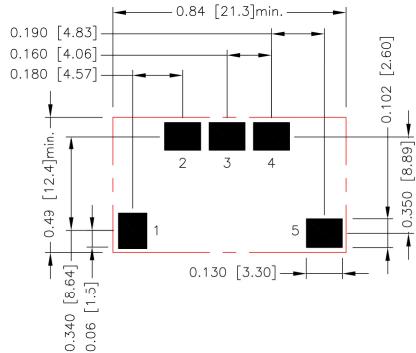


All dimensions in inch[mm]
Pad size(lead free recommended)
Top view pad 1.2.3.4.5: 0.130x0.102[3.30x2.60]

DOH06-05T

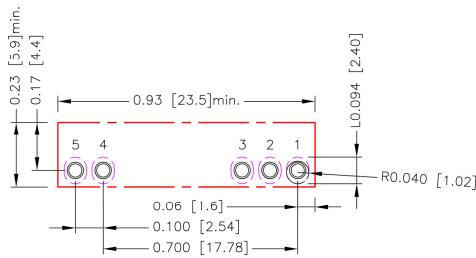

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.4.5: Φ 0.047[1.20]
Top view pad 1.2.3.4.5: Φ 0.059[1.50]
Bottom view pad 1.2.3.4.5:
Groove R0.040[1.02]L-0.094[2.40]

DOH06-05TA




All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.4.5: Φ 0.047[1.20]
Top view pad 1.2.3.4.5: Φ 0.059[1.50]
Bottom view pad 1.2.3.4.5:
Groove R0.040[1.02]L-0.094[2.40]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed 125°C. When Operating, adequate cooling must be provided to maintain the test point temperature at or below 125°C. Although the maximum point Temperature of the power modules is 125°C, you can limit this Temperature to a lower value for extremely high reliability. The unit will shutdown if the thermal reference point exceeds 135°C (typical), but the thermal shutdown is not intended as a guarantee that the unit will survive temperature beyond its rating. The module will automatically restarts after it cools down.


- Thermal test condition with vertical direction by natural convection (20LFM).

DOS06-05T

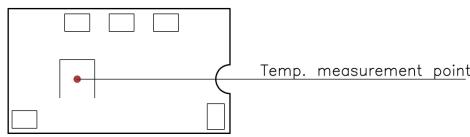


BOTTOM VIEW

DOH06-05T

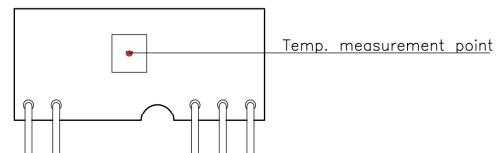

BOTTOM VIEW

DOH06-05TA




BOTTOM VIEW

OUTPUT VOLTAGE PROGRAMMING

Output voltage programmable from 0.75V to 3.3V by connecting a single resistor (shown as Trim Table) between the Trim and GND pins of the module. To calculate the value of the resistor Rtrim for a particular output voltage Vout, use the following equation:

■ **Rtrim Equation :** $R_{trim} = \left[\frac{21070}{V_{out} - 0.7525} - 5110 \right] \Omega$

Trim Figure

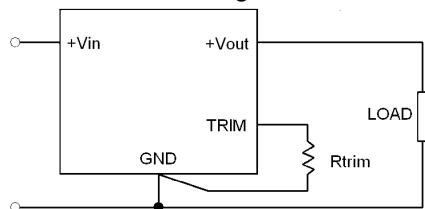

Trim Table

Vout(set) (VDC)	Rtrim (kΩ)
0.7525	Open
1.2	41.973
1.5	23.077
1.8	15.004
2.5	6.974
3.3	3.160