




■ Description

Sealed enclosure with two M20 cable glands for input and output.
Optional accessory for the Casambi/DALI controller: CBU-DA-1P and other Casambi White products.

■ Specifications

Rated voltage	400Vac
Isolation	2500Vac
Working temperature range	-40°C to +105°C
IP Protection level	IP66. (IP68 not permanent)
Cable diameter	9-12mm
Building material	PA66 with anti UV treatment
Fire resistance, flammability	UL-94 V-0
Dimensions (Length x Width x Height)	131 x 68 x 37mm
Certificates	CE / TUV / RCM

■ External dimensions

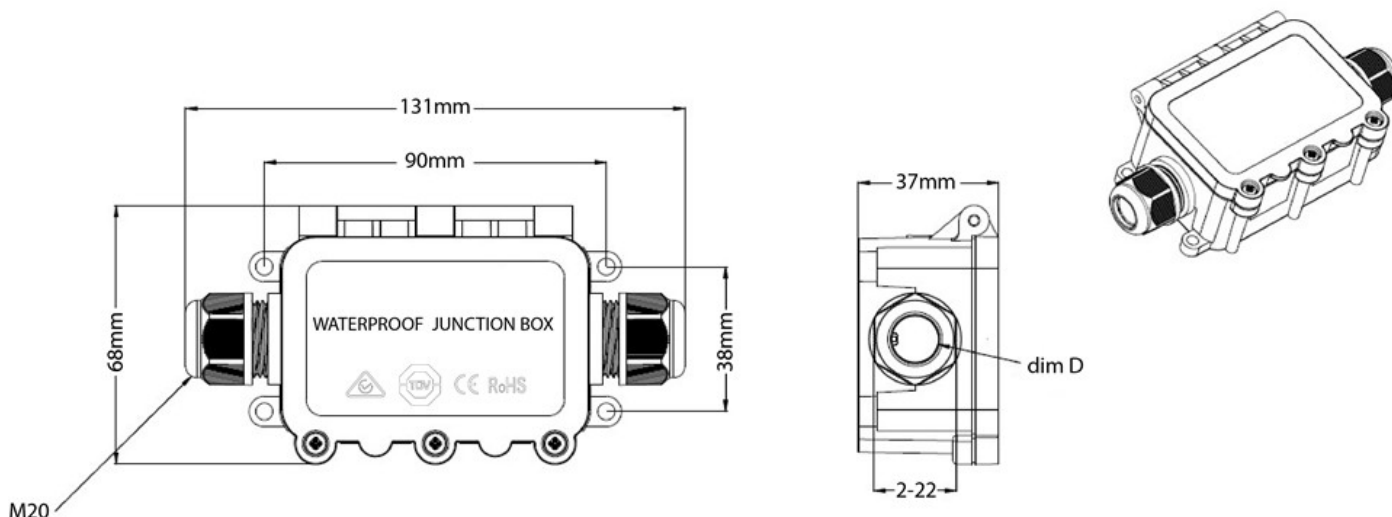

- **Internal dimensions**



Note: For use with the CBU-DA-1P and other similar devices, the center pin on the housing must be cut off. This pin is used to secure a standard terminal block, which is not included.