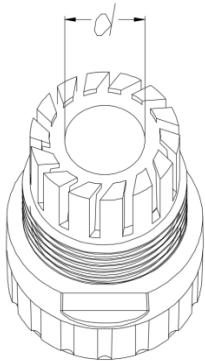
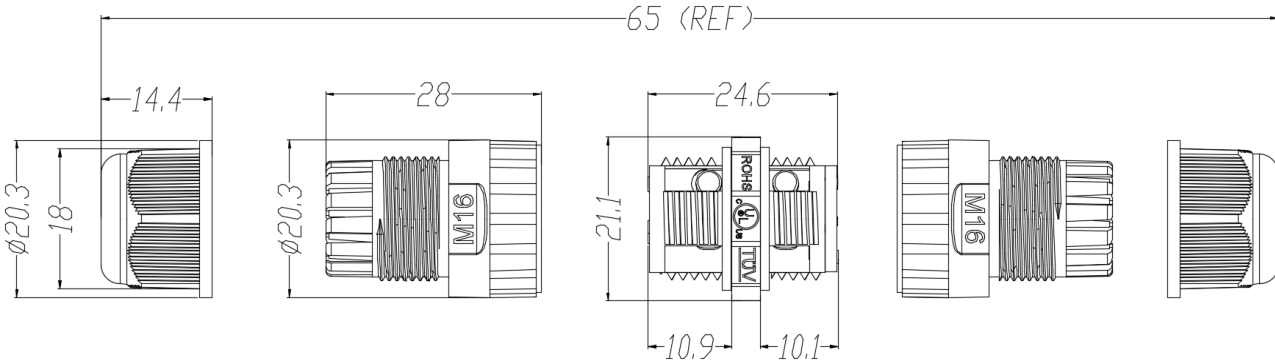
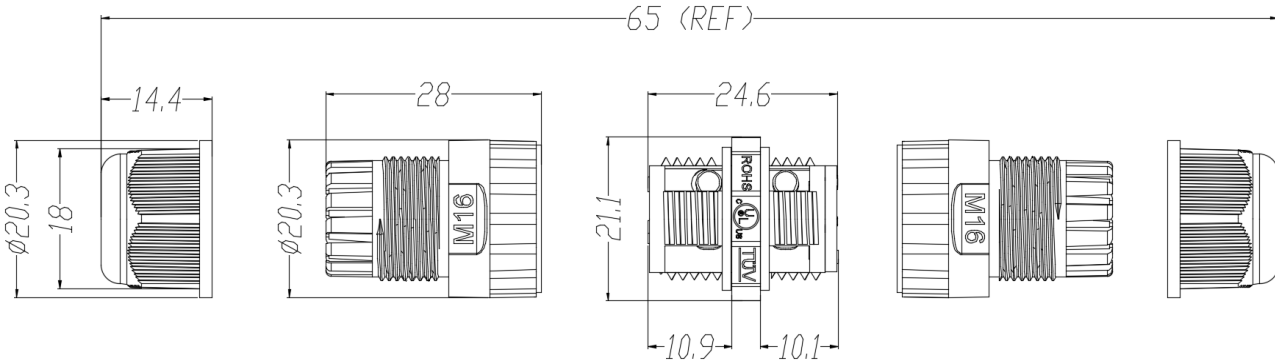
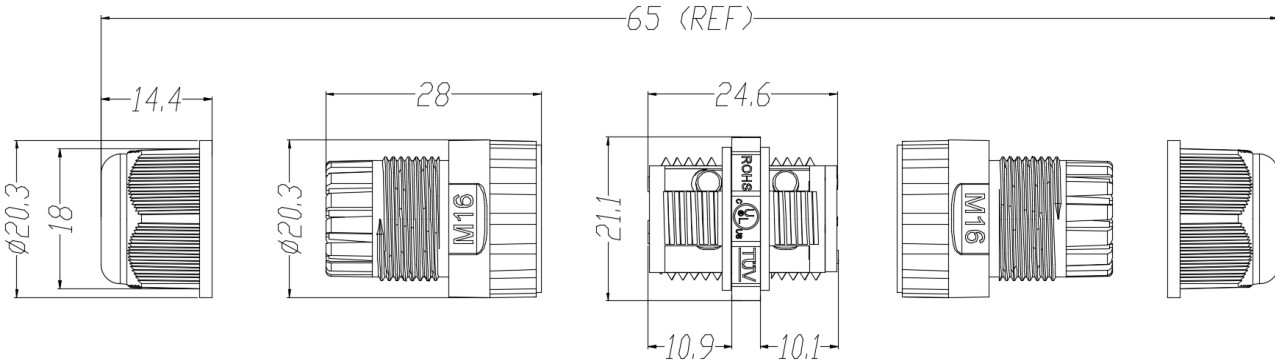


1		2		3		4		5		6		7		8				
A	Raw Material		PA66、SILICONE、 COPPER ALLOY		2 PIN 								REV	DESCRIPTION	DESIGN	DATE		
	Certification		CQC/SAA/UL/TUV/RoHS/CE										A0	NEW DRAWING	MYJ	2022/4/8		
	Flame-resistant rating		UL94 V-2															
	Level of protection		IP68															
	Voltage rating/Current rating		450 V / 17.5 A															
B	Withstanding voltage		2500 V															
	Cable gauge		0.5~1.5mm²															
	Operating temperature		-40~105 ℃															
C	Part Number		Rubbers Diameter(d)		Outer Cable Diameter													
	EW-M16-02101YG9		φ 9.8 mm		φ 7~10 mm													
	EW-M16-02101YG8		φ 8.1 mm		φ 5~8 mm													
	EW-M16-02101YG6		φ 6.5 mm		φ 3.5~7 mm													
	EW-M16-02101YG5		φ 5 mm		φ 3~5 mm													
D	Rubbers Diameter																	
E																		
F																		
16 g		42x30x34 cm	1000 PCS	17 Kg	TOLERANCE UNSPECIFIED			UNIT	mm	DRAW		P/N	EW-M16-02101YG##					
Weight		MEAS	Each carton number	G. W.	X. ±0.35	X.XX ±0.10	X.° ±3°	SCALE	1:1	CHKD		D/N	EW-M16-02101YG##					
					X.X ±0.20	X.XXX ±0.05	X.X° ±2°	SHEET	1/1	APPD		TITLE	EW-M16-2P WATERPROOF CONNECTOR					
							X.XX° ±1°											
1		2		3		4		5		6		7		8				