



IP68 Waterproof Connector

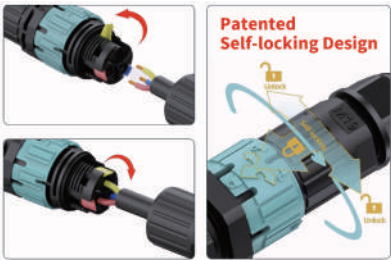

Screw Free

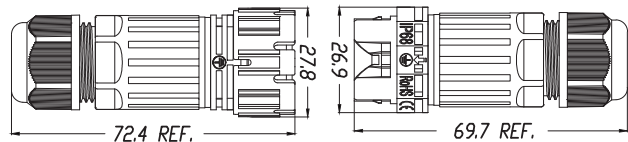

Options

Number of Poles	 2Pin	 3Pin
Seal ring		
Cable range	5~9mm	9~12mm
Stripping length	11~14 mm	

EW-P23MF-XP

Male & Female Self-locking Screwless Fast Wiring Connector
(X can be 2/3, denoting the number of poles)

Wiring Method:

Screwless fast wiring

Housing Material: PA66

Seal Ring Material: Silicone Rubber

Terminal Material: Copper alloy

IP Rating: IP68

Fire Rating: UL94 V-0

Rated Voltage: 450V

Rated Current: 16A

Wire Section: 0.5~2.5mm²

Outer Cable Diameter: 5-9mm, 9-12mm

Pluggable Life: 1,500 times

Ambient Temperature: -40°C~105°C

Warranty: 3 Years

Packaging

Export Carton (L*W*H): 42*30*26cm

Quantity: 50pcs / PE PACK (Male & Female packed separately)

250 sets / CTN

Gross Weight: EW-P23MF-2P --- 13.3KGs

EW-P23MF-3P --- 13.8KGs



Installation Illustration

