



P-DUKE
POWER

HSR01 Series

Non-Isolation DC-DC Converter

3
YEARS
WARRANTY

RoHS COMPLIANT

REACH COMPLIANT



Automobile



Automation



Datacom



IPC



Industry



Measurement



Telecom



Boat



Charger



Medical



PV



Railway

CE



PART NUMBER STRUCTURE

HSR01 -	48	S	05	-	A
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)		Mounting Options

* See table as below

S:Single


3P3:3.3
05:5
6P5:6.5
09:9
12:12
15:15
24:24

: Vertical Mounting
: Horizontal Mounting

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load A	Input Current @ No Load mA	Efficiency %		Maximum Capacitor Load μF
					24Vin	48Vin	
HSR01-48S3P3	9 ~ 72	3.3	1	10	82.5	78.0	2400
HSR01-48S05	9 ~ 72	5	1	10	86.5	82.5	1580
HSR01-48S6P5	9 ~ 72	6.5	1	10	88.0	85.0	1200
HSR01-48S09	14 ~ 72	9	1	10	90.0	87.5	880
HSR01-48S12	17 ~ 72	12	1	15	92.5	90.5	660
HSR01-48S15	21 ~ 72	15	1	15	93.0	90.0	530
HSR01-48S24	33 ~ 72	24	0.7	15	—	92.0	330

INPUT SPECIFICATIONS

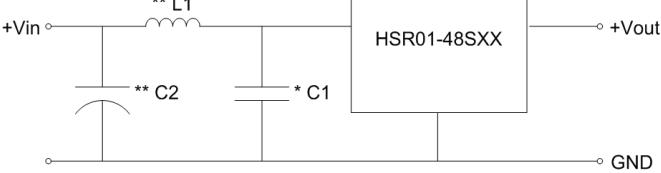Parameter	Conditions	Min.	Typ.	Max.	Unit						
Operating input voltage range	HSR01-48S3P3 HSR01-48S05 HSR01-48S6P5 HSR01-48S09 HSR01-48S12 HSR01-48S15 HSR01-48S24	9	48	72	VDC						
Start up time	Constant resistive load With maximum capacitor	Power up	25		ms						
Input filter	 <p>* It's recommended to equip the external input capacitors at the input of the module. Typical value is 2.2μF/100V. ** If the input will be switched electromechanically, the input should install an external C2 and L1 to avoid voltage transient.</p> <table border="1"> <tr> <td>C1</td> <td>2.2μF/100V</td> </tr> <tr> <td>C2</td> <td>33μF/100V E/C</td> </tr> <tr> <td>L1</td> <td>4.7μH</td> </tr> </table>	C1	2.2μF/100V	C2	33μF/100V E/C	L1	4.7μH				Capacitor type
C1	2.2μF/100V										
C2	33μF/100V E/C										
L1	4.7μH										

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-2.0	+2.0		%
Line regulation	Low Line to High Line at Full Load	-0.5	+0.5		%
Load regulation	0% to 100% of Full Load	-0.6	+0.6		%
Ripple and noise	Measured by 20MHz bandwidth With a 10μF/25V X7R MLCC With a 4.7μF/50V X7R MLCC	Vout≤15VDC Vout=24VDC	50 75		mVp-p
Temperature coefficient		-0.02	+0.02		%/°C
Dynamic load response	50% load step change With a 10μF/25V X7R MLCC With a 4.7μF/50V X7R MLCC	Peak deviation Vout≤15VDC Vout=24VDC Recovery time	90 125 150	180 250 250	mV us
Over load protection	% of Iout rated		180		%
Short circuit protection				Continuous, automatics recovery	

GENERAL SPECIFICATIONS







Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input (Output) to Case	500			VDC
Switching frequency	Nominal input, Full Load	48S3P3 48S05 48S6P5 48S09 48S12 48S15 48S24	143 150 188 225 263 300 413	190 200 250 300 350 400 550	238 250 313 375 438 500 688	kHz
Safety meets						IEC/ EN/ UL 60950-1, 62368-1
Case material						Metal
Potting material						Epoxy (UL94 V-0)
Weight						5.5g (0.194oz)
MTBF	MIL-HDBK-217F, Full load					8.215 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+105	°C
Maximum case temperature				105	°C
Over temperature protection	Internal IC junction			165	°C
Storage temperature range		-55		+125	°C
Thermal impedance	*Thermal test condition with vertical direction mounted on a PCB with 1oz copper and 0.8mm thickness.			35	°C/W
Thermal shock					MIL-STD-810F
Shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH

CAUTION: This power module is not internally fused. An input line fuse must always be used.

CHARACTERISTIC CURVE

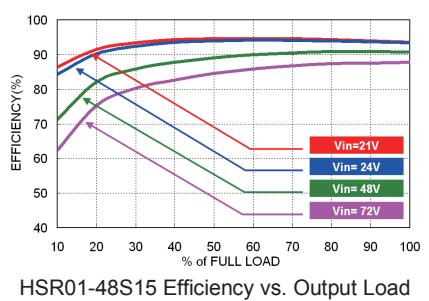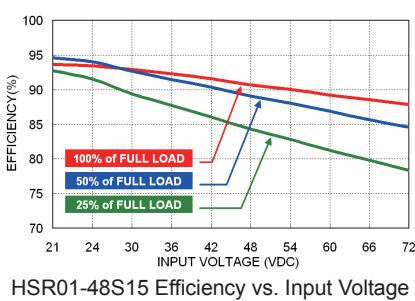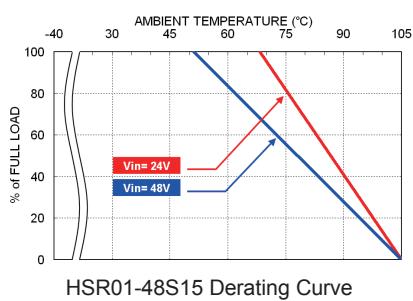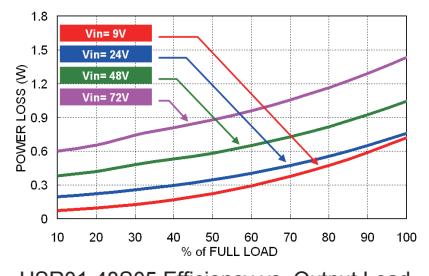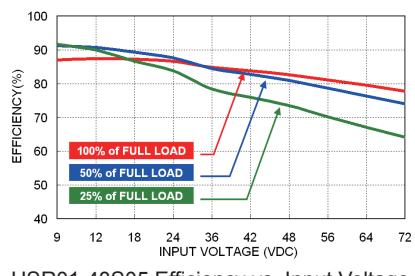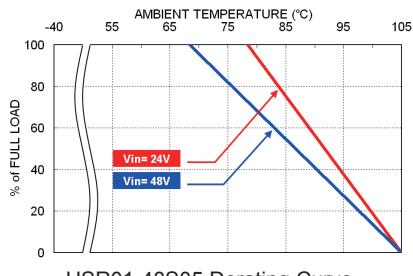

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The input line fuse suggest as below :


Model	Fuse Rating (A)	Fuse Type
HSR01-48S3P3	1.0	Slow-Blow
HSR01-48S05、HSR01-48S24	1.25	Slow-Blow
HSR01-48S6P5、HSR01-48S09、HSR01-48S12、HSR01-48S15	1.6	Slow-Blow

The table based on the information provided in this datasheet on inrush energy and maximum DC input current at low Vin.



MECHANICAL DRAWING

Standard type: Vertical mounting

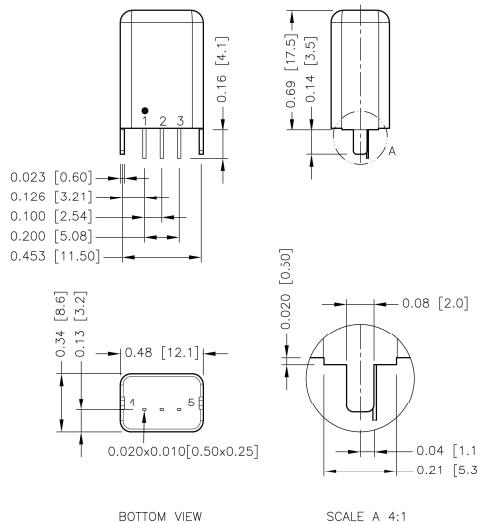


PIN CONNECTION

PIN	DEFINITION
1	+Vin
2	GND
3	+Vout
4	CASE PIN
5	CASE PIN

1. All dimensions in inch [mm]
2. Tolerance $x.x\pm 0.02$ [$x\pm 0.5$]
 $x.x\pm 0.010$ [$x.x\pm 0.25$]
3. Pin dimension tolerance ± 0.004 [0.10]

Suffix-A: Horizontal mounting

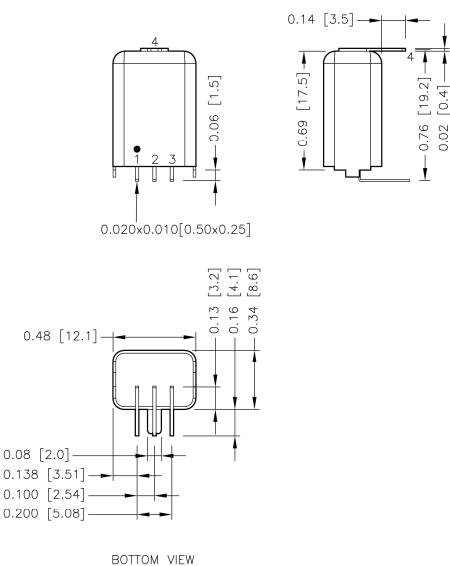


PIN CONNECTION

PIN	DEFINITION
1	+Vin
2	GND
3	+Vout
4	CASE PIN

1. All dimensions in inch [mm]
2. Tolerance $x.x\pm 0.02$ [$x\pm 0.5$]
 $x.x\pm 0.010$ [$x.x\pm 0.25$]
3. Pin dimension tolerance ± 0.004 [0.10]


RECOMMENDED PAD LAYOUT

Standard type

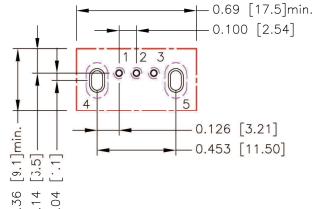

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3: \varnothing 0.031[0.80]
Through hole 4.5:Groove R0.031[0.80]L0.110[2.80]
Top view pad 1.2.3: \varnothing 0.039[1.00]
Top view pad 4.5:Groove R0.043[1.10]L0.134[3.40]
Bottom view pad 1.2.3: \varnothing 0.063[1.60]
Bottom view pad 4.5:Groove R0.063[1.60]L0.201[5.10]

Suffix-A:

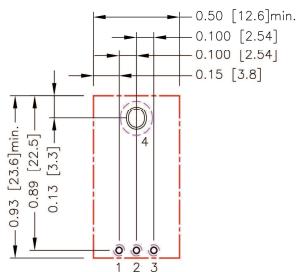

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3: \varnothing 0.031[0.80]
Through hole 4:Groove R0.045[1.15]L0.106[2.70]
Top view pad 1.2.3: \varnothing 0.039[1.00]
Top view pad 4:Groove R0.057[1.45]L0.130[3.30]
Bottom view pad 1.2.3: \varnothing 0.063[1.60]
Bottom view pad 4:Groove R0.091[2.3]L0.197[5.00]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.

Proper cooling can be verified by measuring the point as the figure below.


The temperature at this location should not exceed "Maximum case temperature".

When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".

You can limit this Temperature to a lower value for extremely high reliability.

The unit will shutdown if the internal IC junction exceeds 165°C (typical), but the thermal shutdown is not intended as a guarantee that the unit will survive temperature beyond its rating. The module will automatically restarts after it cools down.

- Thermal test condition with vertical direction by natural convection (20LFM) and mounted on a PCB with 1oz copper and 0.8mm thickness.

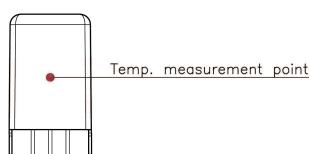

FRONT VIEW