



P-DUKE POWER

HSRP6 Series

Non-Isolation DC-DC Converter

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Automobile



Automation



Datacom



IPC



Industry



Measurement



Telecom



Boat



Charger



Medical



PV



Railway



NON
-isolation

NO
Min. Load
Required

OCP

OTP

SCP

PART NUMBER STRUCTURE

HSRP6

-

48

Input
Voltage
(VDC)

S

Output
Quantity

05

Output
Voltage
(VDC)

-

A

Mounting
Options

* See table as below


S:Single

3P3:3.3
05:5
6P5:6.5
09:9
12:12
15:15
24:24

□: Vertical Mounting
A: Horizontal Mounting

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency		Maximum Capacitor Load
	VDC	VDC	mA	mA	24V _{in} %	48V _{in}	μF
HSRP6-48S3P3	9 ~ 72	3.3	600	3	85.0	81.0	1920
HSRP6-48S05	9 ~ 72	5	600	3	89.0	85.0	1260
HSRP6-48S6P5	9 ~ 72	6.5	600	3	90.5	87.5	960
HSRP6-48S09	14 ~ 72	9	600	3	92.0	89.0	700
HSRP6-48S12	17 ~ 72	12	600	3	92.5	91.0	530
HSRP6-48S15	20 ~ 72	15	600	3	94.0	92.0	420
HSRP6-48S24	33 ~ 72	24	400	3	—	93.5	330

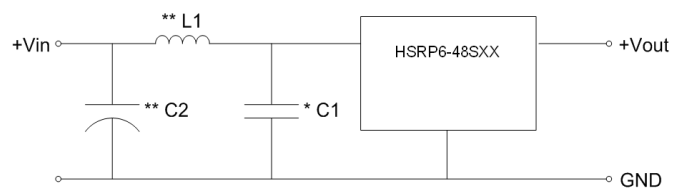INPUT SPECIFICATIONS												
Parameter	Conditions	Min.	Typ.	Max.	Unit							
Operating input voltage range	HSRP6-48S3P3	9	48	72	VDC							
	HSRP6-48S05	9	48	72								
	HSRP6-48S6P5	9	48	72								
	HSRP6-48S09	14	48	72								
	HSRP6-48S12	17	48	72								
	HSRP6-48S15	20	48	72								
	HSRP6-48S24	33	48	72								
Start up time	Constant resistive load Power up With maximum capacitor V _{out} ≤ 15VDC V _{out} = 24VDC		25 50		ms							
Input filter	 <p>* It's recommended to equip the external input capacitors at the input of the module. Typical value is 2.2μF/100V. ** If the input will be switched electromechanically, the input should install an external C2 and L1 to avoid voltage transient.</p> <table border="1"> <tr> <td>C1</td> <td>2.2μF/100V</td> </tr> <tr> <td>C2</td> <td>33μF/100V E/C</td> </tr> <tr> <td>L1</td> <td>4.7μH</td> </tr> </table>	C1	2.2μF/100V	C2	33μF/100V E/C	L1	4.7μH	Capacitor type				
C1	2.2μF/100V											
C2	33μF/100V E/C											
L1	4.7μH											

OUTPUT SPECIFICATIONS						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Voltage accuracy		-2.5		+2.5	%	
Line regulation	Low Line to High Line at Full Load	-0.9		+0.9	%	
Load regulation	10% to 100% of Full Load	-0.6		+0.6	%	
Ripple and noise	Measured by 20MHz bandwidth V _{out} ≤ 15VDC V _{out} = 24VDC		50		mVp-p	
			75			
Temperature coefficient		-0.02		+0.02	%/°C	
Dynamic load response	50% load step change	Peak deviation	90	180	mV	
		Recovery time	150	250	us	
Over load protection	% of I _{out} rated		200		%	
Short circuit protection		Continuous, automatic recovery				

GENERAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit	
Switching frequency	Nominal input, Full Load	48S3P3	117	180	243	kHz
		48S05	130	200	270	
		48S6P5	130	200	270	
		48S09	195	300	405	
		48S12	247	380	513	
		48S15	293	450	608	
		48S24	416	640	864	
Safety meets		IEC/ EN/ UL 60950-1, 62368-1				
Case material		Non-conducted black plastic				
Potting material		Epoxy (UL94 V-0)				
Weight		3.0g (0.106oz)				
MTBF	MIL-HDBK-217F, Full load	1.816 x 10 ⁷ hrs				

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+105	°C
Maximum case temperature				105	°C
Over temperature protection	Internal IC junction		165		°C
Storage temperature range		-55		+125	°C
Thermal shock					MIL-STD-810F
Shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

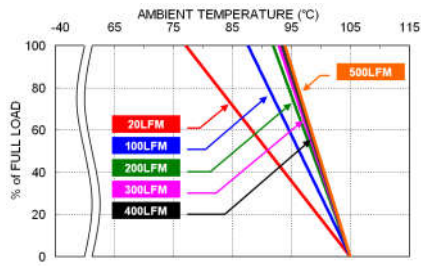

HSRP6-48S24 Derating Curve

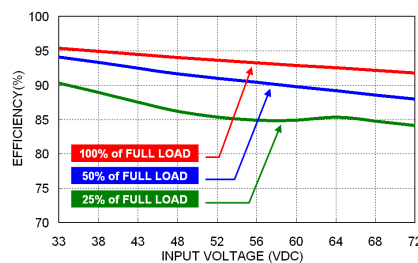

HSRP6-48S24 Efficiency vs. Input Voltage

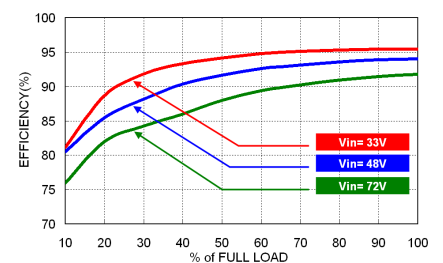

HSRP6-48S24 Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
HSRP6-48S3P3、HSRP6-48S05、HSRP6-48S24	0.8	Slow-Blow
HSRP6-48S6P5、HSRP6-48S09、HSRP6-48S12、HSRP6-48S15	1.0	Slow-Blow


The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

Standard: Vertical mounting

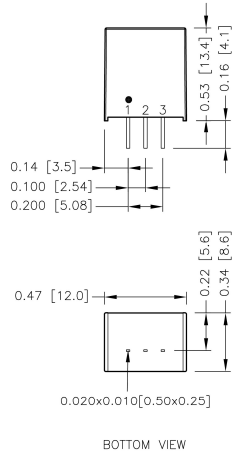

Suffix-A: Horizontal mounting

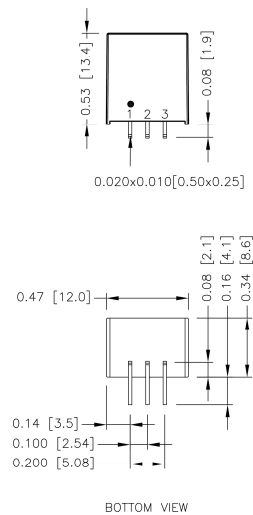

PIN CONNECTION

PIN	DEFINITION
1	+Vin
2	GND
3	+Vout

1. All dimensions in inch [mm]
2. Tolerance :x.xxx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]


PIN CONNECTION

PIN	DEFINITION
1	+Vin
2	GND
3	+Vout

1. All dimensions in inch [mm]
2. Tolerance :x.xxx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]


RECOMMENDED PAD LAYOUT

Standard:



All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3:∅0.031[0.80]
 Top view pad 1.2.3:∅0.039[1.00]
 Bottom view pad 1.2.3:∅0.063[1.60]

Suffix-A:



All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3:∅0.031[0.80]
 Top view pad 1.2.3:∅0.039[1.00]
 Bottom view pad 1.2.3: ∅0.063[1.60]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.

Proper cooling can be verified by measuring the point as the figure below.


The temperature at this location should not exceed “Maximum case temperature”.

When Operating, adequate cooling must be provided to maintain the test point temperature at or below “Maximum case temperature”.

You can limit this Temperature to a lower value for extremely high reliability.

The unit will shutdown if the internal IC junction exceeds 165°C (typical), but the thermal shutdown is not intended as a guarantee that the unit will survive temperature beyond its rating. The module will automatically restarts after it cools down.

- Thermal test condition with vertical direction by natural convection (20LFM) and mounted on a PCB with 1oz copper and 0.8mm thickness.



FRONT VIEW