

# DC/DC Converter

K78UXX-500R3 (L) Series

# MORNSUN®

Wide input voltage non-isolated and regulated single output

## FEATURES



Patent Protection RoHS

- High efficiency up to 93%
- No-load input current as low as 1.5 mA
- Operating ambient temperature range: -40°C to 85°C
- Output short-circuit protection
- Input voltage range up to 10:1
- Pin compatible with K78XX series
- International standard pin package

K78Uxx-500R3(L) series are high efficiency switching regulators. The converters feature high efficiency, low loss and short-circuit protection in a compact DFN package. These products are widely used in applications such as industrial control, instrumentation and electric power.

## Selection Guide

Certification	Part No.	Input Voltage (VDC)*	Output		Full Load Efficiency (%) Typ. Vin Min./Vin Max.	Capacitive Load (µF) Max.
		Nominal (Range)	Voltage (VDC)	Current (mA) Max.		
--	K78U03-500R3 (L)	48 (9-90)	3.3	500	82/69	100
	K78U05-500R3 (L)	48 (9-90)	5	500	87/75	
	K78UX6-500R3 (L)	48 (9-90)	6.5	500	91/78	
	K78U09-500R3 (L)	48 (14-90)	9	500	91/80	
	K78U12-500R3 (L)	48 (18-90)	12	500	91/83	
	K78U15-500R3 (L)	48 (20-90)	15	500	93/84	
	K78U24-300R3 (L)	48 (36-90)	24	300	93/85	

Note: \* For input voltage exceeding 80 VDC, an input capacitor of 22µF/100V is required.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
No-load Input Current	Nominal input voltage	--	--	1.5	mA
Reverse Polarity at Input		Avoid / Not protected			
Input Filter		Capacitance filter			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy	10%-100%, input voltage range	3.3V output	--	±3.5	±4.5	%
		Others	--	±2	±3	
Linear Regulation	Full load, input voltage range	3.3V output	--	±0.6	±1.5	
		Others	--	±0.6	±1.2	
Load Regulation	Nominal input voltage, 10% -100% load	--	±1.0	±2.0		
Ripple & Noise*	20MHz bandwidth, nominal input voltage, full load	--	40	80	mVp-p	
Temperature Coefficient	Operating temperature -40°C to +85°C	--	--	±0.03	%/°C	
Transient Response Deviation	Nominal input voltage, 25% load step change	--	±0.4	±1.5	%	

# MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2020.11.26-A/0

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

# DC/DC Converter

K78UXX-500R3 (L) Series

MORNSUN®

Transient Recovery Time	Nominal input voltage, 25% load step change	--	0.2	1	ms
Short-circuit Protection	Nominal input voltage	Continuous, self-recovery			
Note: * The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information;					

## General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature	See Fig.1, Fig.2.	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency*	Full load, nominal input voltage	--	300	--	kHz
MTBF	MIL-HDBK-217F@25°C	2000	--	--	k hours

Note: \*Different output voltage with different switching frequency.

## Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)	
Dimensions	K78U-500R3 /K78U24-300R3	11.50 x 9.00 x 17.50 mm
	K78U-500R3L/K78U24-300R3L	19.00 x 11.50 x 9.00 mm
Weight	3.8g(typ.)	
Cooling Method	Free air convection	

## Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 6-② for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig. 6-② for recommended circuit)	
Immunity	ESD*	IEC/EN 61000-4-2	Contact ±4KV	perf. Criteria B
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria B
	CS	IEC/EN 61000-4-6	3Vr.m.s	perf. Criteria B
	EFT	IEC/EN 61000-4-4	100KHz ± 1KV (see Fig. 6-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN 61000-4-5	line to line ± 1KV (see Fig. 6-① for recommended circuit)	perf. Criteria B

## Typical Characteristic Curves

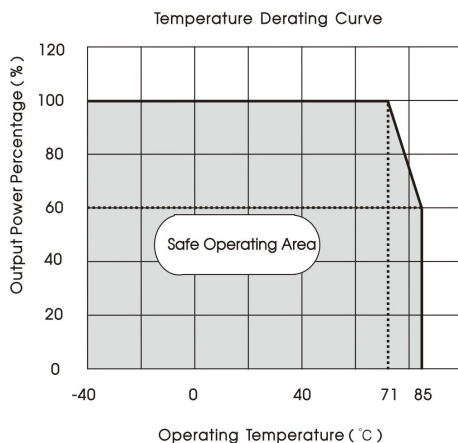


Fig.1 K78UXX-500R3(L)  
K78U24-300R3(L) (Vin=24V~60V)

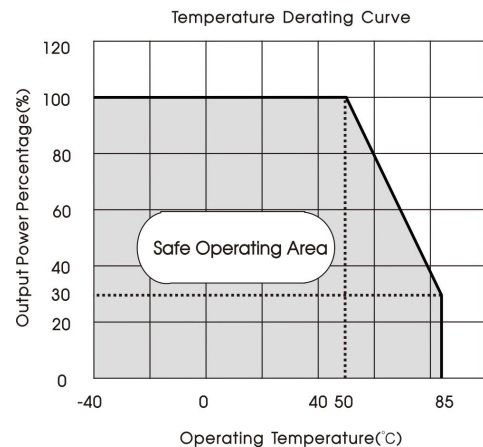


Fig.2 K78U24-300R3(L) (Vin≥60V)

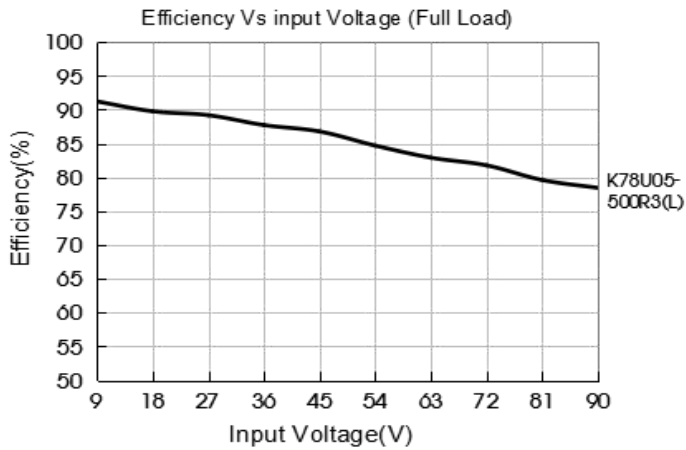


Fig.3

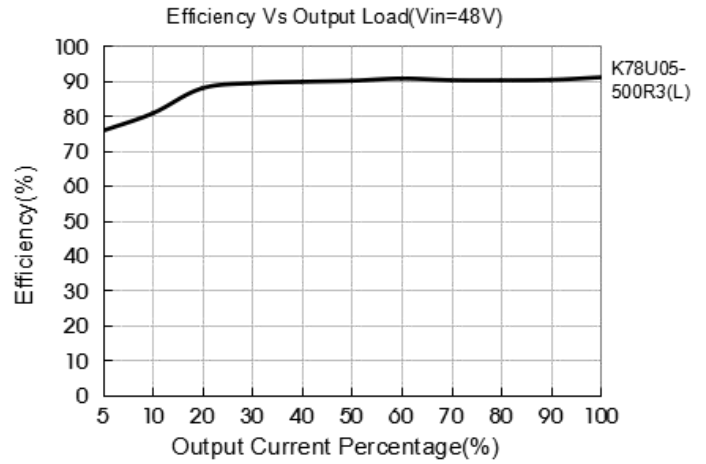


Fig.4

Design Reference

1. Typical application

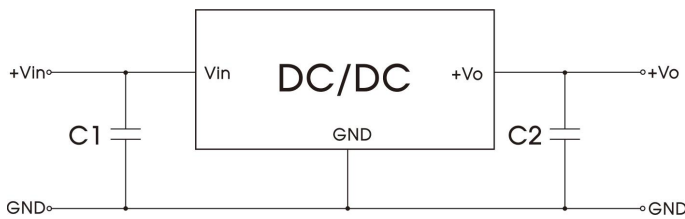


Fig. 5

Part No.	C1 (ceramic capacitor)	C2 (ceramic capacitor)
K78U03-500R3 (L)	10μF/100V	22μF/10V
K78U05-500R3 (L)		22μF/10V
K78UX6-500R3 (L)		22μF/10V
K78U09-500R3 (L)		22μF/16V
K78U12-500R3 (L)		22μF/25V
K78U15-500R3 (L)		22μF/25V
K78U24-300R3 (L)		10μF/50V

Table 1

Notes:

- The required C1 and C2 capacitors must be connected as close as possible to the terminals of the module;
- Refer to Table 1 for C1 and C2 capacitor values. For certain applications, increased values and/or tantalum or low ESR electrolytic capacitors may also be used instead;
- Converter cannot be used for hot swap and with output in parallel.

2. EMC compliance circuit

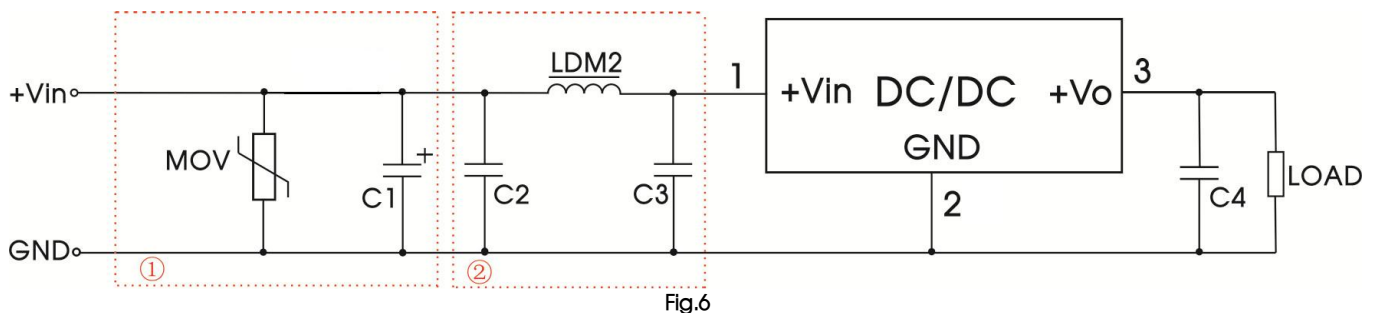






Fig.6

Part No.	MOV	C1	C2	LDM2	C3	C4
K78UXX-500R3(L)	S20K30	680μF / 100V	4.7μF/100V	120μH	4.7μF/100V	10μF/50V

Table.2

3. For additional information please refer to DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

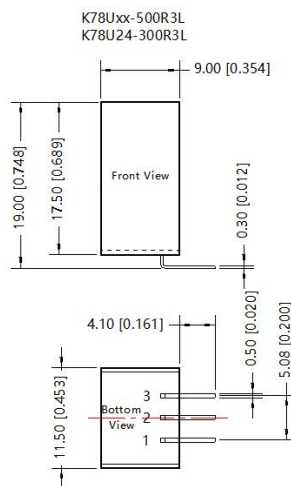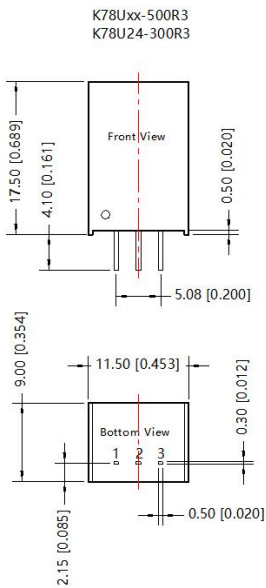

Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Function
1	Vin
2	GND
3	+Vo

Note:  
Unit: mm [inches]  
Pin diameter tolerances:  $\pm 0.10 [\pm 0.004]$   
General tolerances:  $\pm 0.50 [\pm 0.020]$

Notes:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Tape/Reel packaging bag number: 58210021(K78UXX-500R3, K78U24-300R3); 58210027(K78U-500R3L, K78U24-300R3L);
- The maximum capacitive load offered were tested at nominal input voltage and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)