

MechaTronix in LED

ModuLED Giga-HBG Star LED Cooler ø152mm for MEAN WELL HBG Driver



Features & Benefits

- The ModuLED Giga HBG modular passive LED coolers are specifically designed for Low Bay, Mid Bay and High Bay luminaries with the driver mounted on the LED cooler.
- Cooling performance 8,000 to 16,000 lumen.
- Thermal resistance range R_{th} 0.46 - 0.52°C/W.
- Modular design with mounting holes foreseen for direct mounting of various brands LED modules and COB's, MEAN WELL HBG-160 LED drivers and driver box.
- Diameter 152mm - Standard height 100 / 150mm. Other heights on request.
- Extruded from highly conductive aluminum.



Order Information



Example : ModuLED Giga 152100-B-HBG

ModuLED Giga 152 **1** - **2** -HBG

- 1** Height (mm)
- 2** Anodising Color
B - Black
C - Clear

ModuLED Giga-HBG is designed in this way that you can mount LED modules from various manufacturers on the same LED cooler

Simple mounting with self tapping screws

Recommended screw force 6lb/in

Screws are available from MechaTronix

MechaTronix in LED

ModuLED Giga-HBG Star LED Cooler ø152mm for MEAN WELL HBG Driver



Product Details

Model n°	ModuLED Giga 152100-HBG	ModuLED Giga 152150-HBG
Dimension (mm)* ¹	ø152 x h100	ø152 x h150
Volume (mm ³)	566553	857898
Cooling Surface (mm ²)	363547	541592
Weight (gr)	1530	2316
Thermal Resistance (°C/W)* ²	0.52	0.46
Power Pd (W)* ³	95	110
Heat Sink Material	AL6063-T5	AL6063-T5

*¹ 3D files are available in ParaSolid, STP and IGS on request

*² The thermal resistance Rth is determined with a calibrated heat source of 30mm x 30mm central placed on the heat sink, Tamb 40° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C
The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

*³ Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C
The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed
Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module

To calculate the dissipated power please use the following formula: $P_d = P_e \times (1 - \eta_L)$

Pd - Dissipated power

Pe - Electrical power

η_L = Light efficiency of the LED module

Notes:

- MechaTronix reserves the right to change products or specifications without prior notice.
- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MechaTronix.

No.818, Dashun 2nd Rd., Sanmin Dist., Kaohsiung City 80787, Taiwan

sales@mechatronix-asia.com www.led-heatsink.com www.mechatronix-asia.com

Tel: +886-7-381-5892 Fax: +886-7-383-9293 VAT: 28600841

MX
MechaTronix

MechaTronix in LED

ModuLED Giga-HBG Star LED Cooler ø152mm for MEAN WELL HBG Driver



Mounting Options

The ModuLED Giga-HBG modular passive LED coolers are standard foreseen from a variety of mounting holes which allow direct mounting of LED engines, COB's and secondary optics on the LED heat sink.

In this way mechanical afterwork and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED coolers.

For a detailed overview please see ModuLED Giga datasheet under standard products or the brand specific datasheet per LED brand. Below you find an overview of MEAN WELL HBG series LED drivers which standard fit on the ModuLED Giga HBG LED cooler.

MEAN WELL HBG series LED Drivers



The Mean Well HBG LED drivers are specifically developed for mid bay and high bay applications. The round shape of the HBG LED drivers gives an ergonomic fitting with the ModuLED high bay cooler. Thermally this driver is specific designed to sit on top of a LED cooler, with the critical components thermally coupled to the top of the driver so free air convection can be optimal. In combination with the MechaTronix ModuLED Mega HBG this makes your ideal LED engine up to 10,000 lumen.

Mounting indicator marks overview

Keep in mind to keep a gap at least 10mm between the LED cooler and the driver to allow free air convection - this can be obtained with spacers or with the MTX dedicated mounting options.



MEAN WELL HBG-160 series LED driver

Model Names

- HBG-160-24
- HBG-160-36
- HBG-160-48
- HBG-160-60

Driver mounting

- Direct mounting with 4 spacers + (4x) M5 screws
keep minimal 10mm gap between the LED cooler
Red indicator marks
- With Connector set for HBG-160 + (4x) M5 x 20mm screws
Red indicator marks

Model Names

- Connector set for HBG-160

Connector set mounting

- Direct mounting on the LED cooler with 4 screws M5 x 12mm
Orange indicator marks



MechaTronix in LED

ModuLED Giga-HBG Star LED Cooler ø152mm for MEAN WELL HBG Driver



Mounting Options


MechaTronix High Bay LED accessories



With regards to reflectors we have equipped our high bay with the most common high bay reflector standard, the 143mm pitch. For the lenses the standard mounting pattern is foreseen for all 100mm lenses with or without rubber gasket. Although we don't produce our own lenses and reflectors, we keep a limited number of models from stock available for your urgent needs. Below you can find an overview of these models as well as the mounting patterns which go along.

Mounting indicator marks overview

ModuLED Giga
Optics adaptor



Adaptor plate for connection of reflector & lens

With the ModuLED Giga optics adaptor you get an unprecedented flexibility in choices of optics. Equipping your high bays with a wide variety of reflectors in metal or plastic, adding lenses for a controlled light image,... it all becomes plug-and-play.

Model Names

- ModuLED Giga optics adaptor

Mounting

- Direct mounting on the LED cooler with 4 screws M5 x 6mm
- Red indicator marks

CoolBay® Lens

A wide variety of diameter 100mm lenses made out of glass with beam angles 60 degrees, 90 degrees or 120 degrees - Comes together with a high quality rubber gasket. Plastic varieties in clear and milk colored are also available on request.

Model names

- CoolBay® Lens 60
- CoolBay® Lens 90
- CoolBay® Lens 120

Mounting

- With optics adaptor + (4x) screws M5 x 6mm
- Red indicator marks



Dust Protection Plate

When you are using lenses on the ModuLED high bay coolers, the open structure of the cooling fins might lead to dust accumulation in the lens. To avoid this MechaTronix has developed a range of dust protection plates (DPP) which go along with various COB sizes and LED holders. This option is of course not needed when you equip your high bay with a reflector only.

Example DPP-Giga-2828 :

28mm x 28mm COB, Cable hole position for HBG-160 LED driver

DPP-Giga- **1**

1 COB dimension (mm)

Model Names

- DPP-Giga-2828
- DPP-Giga-3838
- DPP-Giga-ZHAGA3

Mounting

- Direct mounting on the LED cooler with 4 screws M5 x 6mm
- Red indicator marks

MechaTronix in LED

ModuLED Giga-HBG Star LED Cooler $\varnothing 152\text{mm}$ for MEAN WELL HBG Driver



Mounting Options



CoolBay® Reflector

A limited range of high-end off-the-shelf available high bay reflectors in high transfective coated aluminium or polycarbonate. All our reflectors follow the most common mounting standard with a pitch of 143mm and can be fixed with the ModuLED Giga optics adaptor towards the LED cooler. All our reflectors are transported in a special adapted packaging for damage prevention.

Model names

- CoolBay® Reflector 45
- CoolBay® Reflector 45 PC
- CoolBay® Reflector 90
- CoolBay® Reflector 120

Mounting

- Direct mounting on optics adaptor with 4 screws M5 x 6mm
Blue indicator marks

MechaTronix in LED


ModuLED Giga-HBG Star LED Cooler $\phi 152\text{mm}$ for MEAN WELL HBG Driver






Drawings & Dimensions

Example: ModuLED Giga 152150-HBG

Bottom - LED & optics side

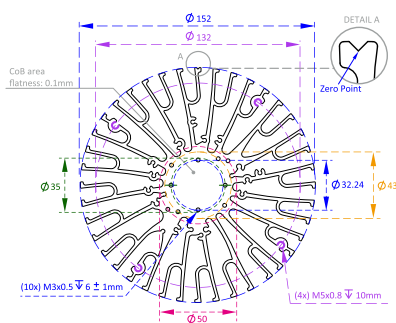


Top - Driver side

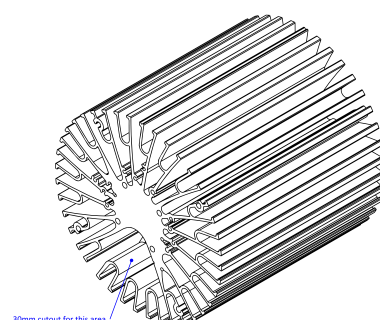

Thermal Data


Dissipated Power Pd(W)	Pd = Pe x (1-ηL)	Heat sink to ambient thermal resistance R _{hs-amb} (°C/W)		Heat sink to ambient temperature rise T _{hs-amb} (°C)	
		ModuLED Giga 152100-HBG	ModuLED Giga 152150-HBG	ModuLED Giga 152100-HBG	ModuLED Giga 152150-HBG
20		0.69	0.60	14	12
40		0.61	0.55	25	22
60		0.57	0.51	34	31
80		0.54	0.48	43	39
100		0.52	0.46	52	46
120		0.51	0.45	61	54
140		-	0.44	-	61
160		-	0.43	-	69

ModuLED Giga performance data at a heat sink to ambient temperature difference, ΔT_{hs-amb} , of 50 °C

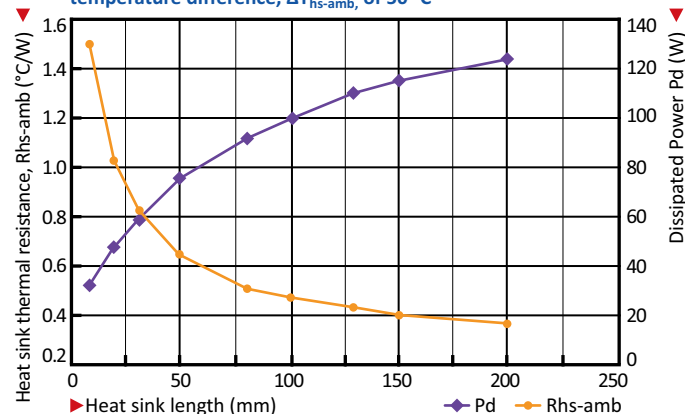

Heat sink to ambient temperature rise T_{hs-amb} (°C)

ModuLED Giga 152100-HBG ModuLED Giga 152150-HBG

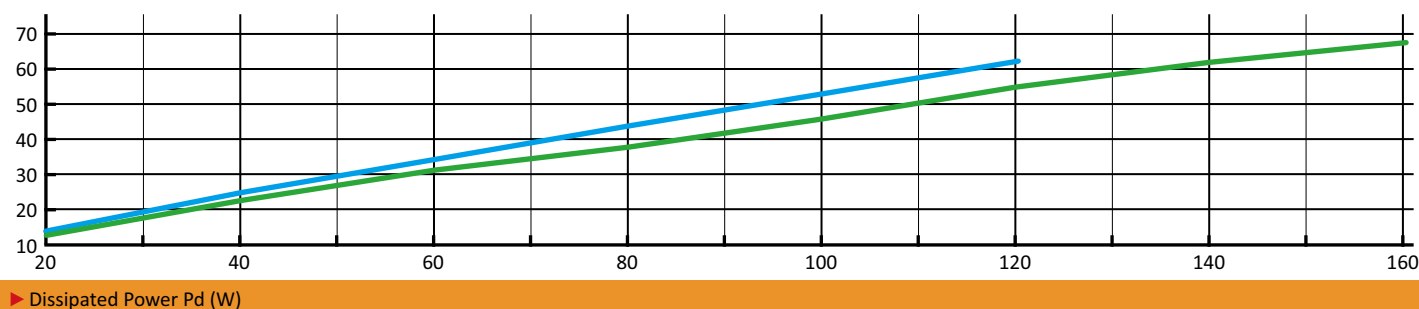

Dissipated Power Pd (W)

No.818, Dashun 2nd Rd., Sanmin Dist., Kaohsiung City 80787, Taiwan

sales@mechatronix-asia.com www.led-heatsink.com www.mechatronix-asia.com

Tel: +886-7-381-5892 Fax: +886-7-383-9293 VAT: 28600841