



P-DUKE POWER

PDS03 • PDH03 Series


DC-DC Converter
Up to 3 Watts

3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

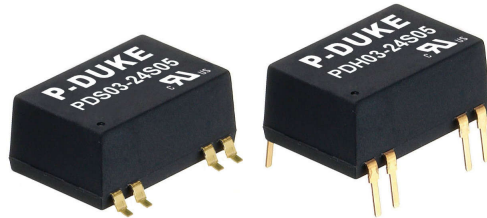

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

UL US CB CE

3000
VDC
Isolation
Voltage

1600
VDC
Isolation
Voltage

2 : 1
Input
Range

TINY
Output
Ripple

NO
Min. Load
Required

REMOTE
ON
OFF

SCP



PART NUMBER STRUCTURE

PDS03 -	48	S	05	H
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Isolation Option

PDS : SMD type PDH : DIP type	05:4.5~9	S:Single	3P3:3.3	<input type="checkbox"/> :Standard type <input type="checkbox"/> :1600VDC isolation <input type="checkbox"/> :3000VDC isolation
	12:9~18 24:18~36 48:36~75		05:5 09:9 12:12 15:15	
		D: Dual	05:±5 12:±12 15:±15	

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
PDS(H)03-05S3P3	4.5 ~ 9	3.3	700	40	75	3300
PDS(H)03-05S05	4.5 ~ 9	5	600	40	79	1680
PDS(H)03-05S09	4.5 ~ 9	9	333	40	79	1000
PDS(H)03-05S12	4.5 ~ 9	12	250	40	80	820
PDS(H)03-05S15	4.5 ~ 9	15	200	50	81	680
PDS(H)03-05D05	4.5 ~ 9	±5	±300	50	80	±1000
PDS(H)03-05D12	4.5 ~ 9	±12	±125	50	80	±470
PDS(H)03-05D15	4.5 ~ 9	±15	±100	55	81	±330
PDS(H)03-12S3P3	9 ~ 18	3.3	700	30	76	3300
PDS(H)03-12S05	9 ~ 18	5	600	30	81	1680
PDS(H)03-12S09	9 ~ 18	9	333	30	80	1000
PDS(H)03-12S12	9 ~ 18	12	250	30	82	820
PDS(H)03-12S15	9 ~ 18	15	200	30	82	680
PDS(H)03-12D05	9 ~ 18	±5	±300	30	80	±1000
PDS(H)03-12D12	9 ~ 18	±12	±125	30	82	±470
PDS(H)03-12D15	9 ~ 18	±15	±100	30	83	±330
PDS(H)03-24S3P3	18 ~ 36	3.3	700	13	76	3300
PDS(H)03-24S05	18 ~ 36	5	600	13	81	1680
PDS(H)03-24S09	18 ~ 36	9	333	13	82	1000
PDS(H)03-24S12	18 ~ 36	12	250	13	82	820
PDS(H)03-24S15	18 ~ 36	15	200	13	83	680
PDS(H)03-24D05	18 ~ 36	±5	±300	13	80	±1000
PDS(H)03-24D12	18 ~ 36	±12	±125	13	83	±470
PDS(H)03-24D15	18 ~ 36	±15	±100	13	83	±330
PDS(H)03-48S3P3	36 ~ 75	3.3	700	10	76	3300
PDS(H)03-48S05	36 ~ 75	5	600	10	81	1680
PDS(H)03-48S09	36 ~ 75	9	333	10	80	1000
PDS(H)03-48S12	36 ~ 75	12	250	10	82	820
PDS(H)03-48S15	36 ~ 75	15	200	10	82	680
PDS(H)03-48D05	36 ~ 75	±5	±300	10	81	±1000
PDS(H)03-48D12	36 ~ 75	±12	±125	10	83	±470
PDS(H)03-48D15	36 ~ 75	±15	±100	10	83	±330

INPUT SPECIFICATIONS						
Parameter	Conditions			Min.	Typ.	Max. Unit
Operating input voltage range	05Vin(nom)			4.5	5	9
	12Vin(nom)			9	12	18
	24Vin(nom)			18	24	36
	48Vin(nom)			36	48	75
Start up time	Constant resistive load	Power up	5			ms
Input surge voltage	1 second, max.	DC-DC ON			15	
		DC-DC OFF			25	
		Remote ON/OFF			50	
					100	
Input filter	Capacitor type					
Remote ON/OFF	Ctrl pin applied current via 1kΩ	DC-DC ON	Open or high impedance			
		DC-DC OFF	2	3	4	mA
		Remote off input current	2.5			mA
Application circuit						
DC-DC ON						
DC-DC OFF						

OUTPUT SPECIFICATIONS							
Parameter	Conditions			Min.	Typ.	Max. Unit	
Voltage accuracy				-1.0		+1.0 %	
Line regulation	Low Line to High Line at Full Load			-0.2		+0.2 %	
Load regulation	No Load to Full Load	Single	-1.0			+1.0	
		Dual	-1.0			+1.0	
	10% Load to 100% Full Load	Single	-0.5			+0.5	
		Dual	-0.8			+0.8	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0			+5.0 %	
Ripple and noise	20MHz bandwidth			30		mVp-p	
Temperature coefficient				-0.02		+0.02 %/°C	
Transient response recovery time	25% load step change			250			μs
Short circuit protection						Continuous, automatic recovery	

GENERAL SPECIFICATIONS						
Parameter	Conditions			Min.	Typ.	Max. Unit
Isolation voltage	1 minute	Input to Output	Standard Type	1600		VDC
			Suffix "H"	3000		
Isolation resistance	500VDC			1		GΩ
Isolation capacitance				Standard Type		50
				Suffix "H"		50
Switching frequency	Full load to minimum load			100		kHz
Safety approvals	IEC /UL/ EN60950-1			UL:E193009 CB:UL(Demko)		
Weight				4.5g (0.16oz)		
MTBF	MIL-HDBK-217F			6.263 x 10 ⁶ hrs		

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating	-40		+71	°C
	With derating	+71		+85	
Maximum case temperature				+100	°C
Storage temperature range		-55		+125	°C
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH
Lead-free reflow solder process					IPC J-STD-020D
Moisture sensitivity level(MSL)					IPC J-STD-033C Level 2a

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55032 With external components	Class A · Class B
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge	EN61000-4-5 ±1kV With an external input filter capacitor (Nippon chemi-con KY series, 220µF/100V)	Perf. Criteria A
	EN61000-4-5 ±1kV With an external input filter capacitor (Nippon chemi-con KY series, 220µF/100V)	
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

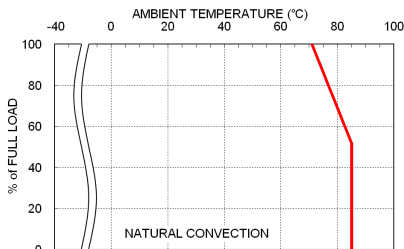

PDS03-48S05 Derating Curve

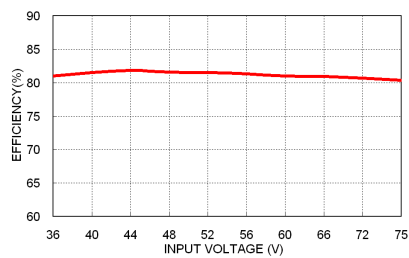


PDS03-48S05 Efficiency vs. Input Voltage

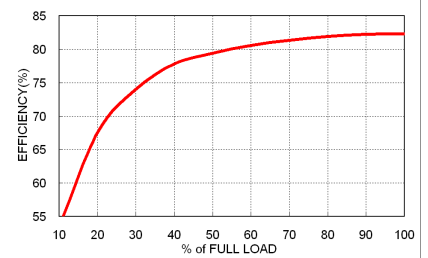

PDS03-48S05 Efficiency vs. Output Load


RECOMMENDED PAD LAYOUT

PDS03



All dimensions in inch[mm]
Pad size(lead free recommended)
Top view pad:0.080x0.070[2.00x1.80]

PDH03

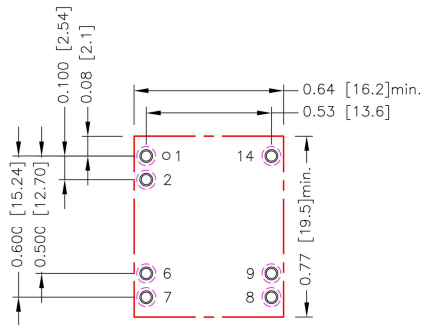

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.6.7.8.9.14: $\Phi 0.043$ [1.10]
Top view pad 1.2.6.7.8.9.14: $\Phi 0.055$ [1.40]
Bottom view pad 1.2.6.7.8.9.14: $\Phi 0.080$ [2.04]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".

You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).



TOP VIEW