
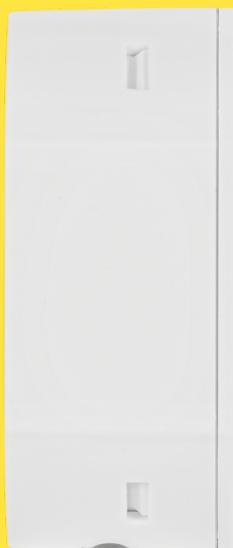


# RELAY R3000WCM

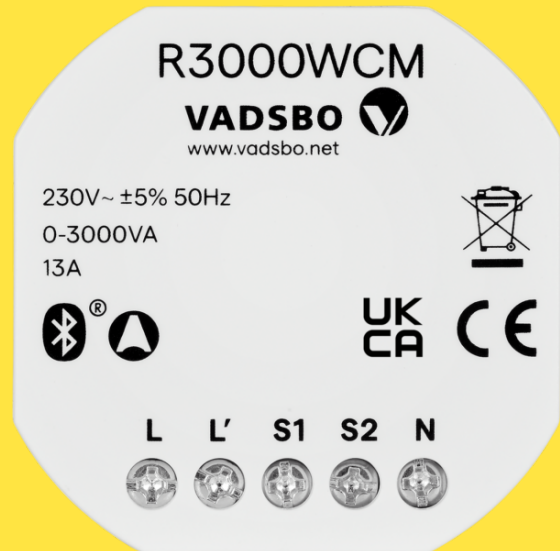

Designation	R3000WCM
Power	0-3000VA
E-number	13 013 45
Art.number	V-42B0106-001Y
Input voltage	220-240V
Frequency	50Hz
Frequency band	2402MHz-2480MHz
Maximum radio-frequency power	4dBm
Standby power	<0,5W
Maximum interrupt rating	13A (cos $\varphi$ =1)
Control signals (ON/OFF)	Can be controlled with one or multiple retractive switches or via Casambi
Remembers the last set state	Yes, even after power outage
Overheat-protection	Yes
Mounting	Wall mount box
Operating humidity	0...80% non-condensing
Operating temperature	-20°C + 30°C
Dimensions LxWxH	47,5x47,5x20mm
Weight	45g
Cable area	2,5mm <sup>2</sup> (AWG 22)
Housing material	Polycarbonate (PC)
Usage areas	Control non-dimmable loads up to an interrupting rating of 13A (cos $\varphi$ =1)
Insulation class	IP20
Cladding class	II
Authorizations	CE