

2328118-1 ✓ ACTIVE

LUMAWISE | LUMAWISE Endurance N

TE Internal #: 2328118-1

TE Internal Description: LUMAWISE ENDURANCE N SHORTING

CAP

[View on TE.com >](#)



Connectors > Lighting Connectors > Street Lighting Controls > Street Lighting Open & Shorting Caps



Lighting Product Type: **Shorting Cap**

Surge Protection: **None**

Primary Product Color: **Black**

Operating Voltage Range: **600 VAC**

Product Diameter: **82.1 mm [3.23 in]**

Features

Product Type Features

Lighting Product Type	Shorting Cap
Sealable	Yes

Configuration Features

Number of Positions	3
---------------------	---

Electrical Characteristics

Surge Protection	None
Operating Voltage Range	600 VAC

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Current Rating (Max)	15 A
------------------------------	------

Dimensions

Product Diameter	82.1 mm[3.23 in]
------------------	------------------

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts





Also in the Series | LUMAWISE Endurance N

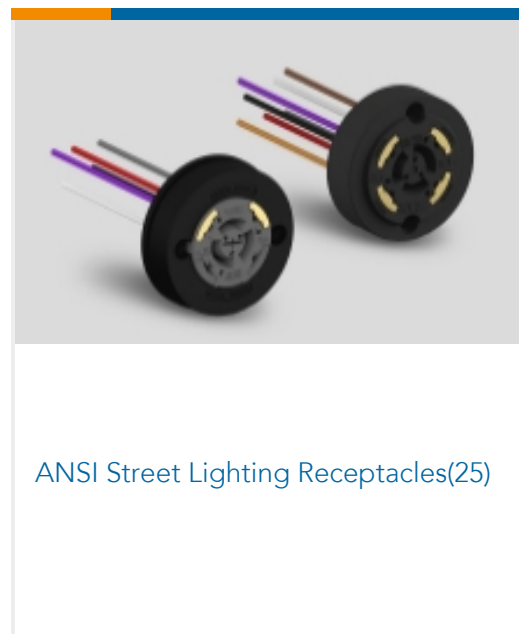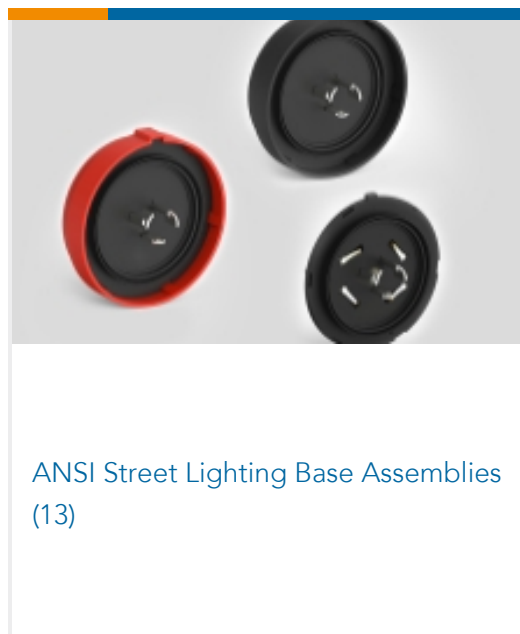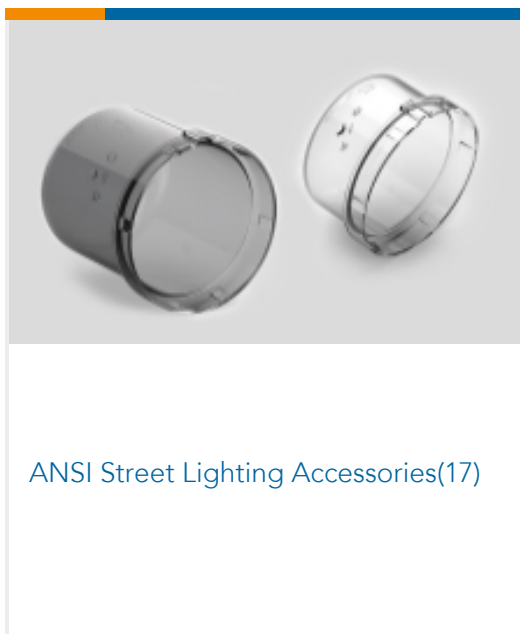

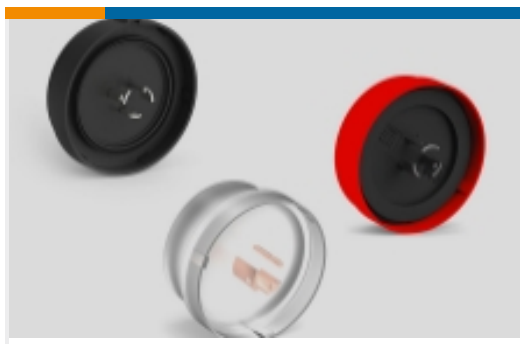

Street Lighting Open & Shorting Caps
(3)

Customers Also Bought



TE Part #2213254-1
LUMAWISE LED HOLDER Z50 LOW
PROFILE 1919



TE Part #2213362-4
RCPT ASSY, DIMMABLE
PHOTOCONTROL, 105C, 3/4



TE Part #1-2834049-2
REC MOD, 2P LATCHED POKE-IN
WTW CONN. BK



TE Part #2213626-1
GASKET, SEALING ROT DIM RECEPT




TE Part #1-480319-9
02P CMNL CAP HSG F/H BLK



TE Part #2213469-1
GASKET, PHOTOCELL RECEPTACLE



TE Part #152301-2
RING TONGUE 5.2MM DIA 20-15 TPST

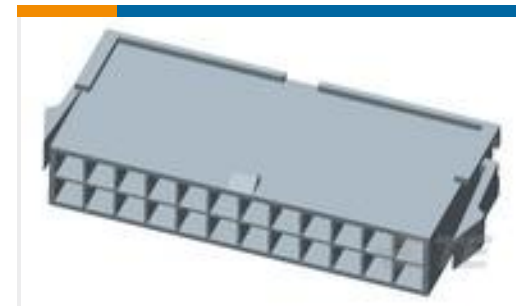

TE Part #1969613-2
2P PM PLUG VAL-U-LOK V0



TE Part #1651813-1
705-0073-01100=SA ADAPTER, SKT



TE Part #1478771-3
ANTI-VIB NYLON GLD 20MM WHT

Documents

Product Drawings

LUMAWISE ENDURANCE N SHORTING CAP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2328118-1_1.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_2328118-1_1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2328118-1_1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[LUMAWISE STREET LIGHT DIMMING AND CONTROL QUICK REFERENCE GUIDE](#)

English

[LUMAWISE ENDURANCE N SHORTING CAPS](#)

English

Product Specifications

[Product Specification](#)

English

Product Environmental Compliance

[Product Compliance](#)

English

[Product Compliance](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

Agency Approvals

[UL Report](#)

English