

# WAF150W WAD150W SERIES

DC-DC CONVERTER



WAF150W



WAD150W

4:1 ULTRA WIDE INPUT RANGE  
UP TO 200Watts



## FEATURES

- NO MINIMUM LOAD REQUIRED
- 2250VDC INPUT TO OUTPUT INSULATION
- WAF150:3.86X2.560X0.67 INCH / WAD150:3.86X2.067X0.67 INCH
- CV+CC MODE
- BUILT-IN EN55011 & EN55022 CLASS A FILTER
- SIX-SIDED CONTINUOUS SHIELD
- WALL MOUNT APPLICATION
- TOP SIDE AND BOTTOM SIDE HEAT DISSIPATION
- ADJUSTABLE OUTPUT VOLTAGE
- INPUT REVERSE PROTECTION
- UL60950-1, EN60950-1, & IEC60950-1 SAFETY APPROVALS
- COMPLIANCE TO EN50155 AND EN45545-2 RAILWAY STANDARD
- CE MARKED
- COMPLIANT TO RoHS II & REACH

## APPLICATIONS

- RAILWAY SYSTEM
- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT
- BATTERY CHARGER

2250VDC  
ISOLATION

REMOTE  
CONTROL

UVP

OCP

SCP

OVP

OTP

## TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	A	mA		
WAF(D)150-24S12W	9 ~ 36	12	12.5	70	86	40000
WAF(D)150-24S15W	9 ~ 36	15	10	80	86	26000
WAF(D)150-24S24W	9 ~ 36	24	6.3	95	87	10000
WAF(D)150-24S28W	9 ~ 36	28	5.4	120	87	7600
WAF(D)150-24S48W	9 ~ 36	48	3.2	130	86	2600
WAF(D)150-48S12W	18 ~ 75	12	12.5	50	88	40000
WAF(D)150-48S15W	18 ~ 75	15	10	60	89	26000
WAF(D)150-48S24W	18 ~ 75	24	6.3	60	89	10000
WAF(D)150-48S28W	18 ~ 75	28	5.4	70	89	7600
WAF(D)150-48S48W	18 ~ 75	48	3.2	70	88	2600
WAF(D)150-110S12W	43 ~ 160	12	12.5	25	88	40000
WAF(D)150-110S15W	43 ~ 160	15	10	25	89	26000
WAF(D)150-110S24W	43 ~ 160	24	6.3	25	89	10000
WAF(D)150-110S28W	43 ~ 160	28	5.4	25	89	7600
WAF(D)150-110S48W	43 ~ 160	48	3.2	35	88	2600

## PART NUMBER STRUCTURE

WAF150	-	24	S	12	W	-	N	F	HC
WAD150	-								
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Remote Control Option	Filter Option	Assembly Option		
	24:9-36 48:16.5-75 110:43-160	S:Single	12:12 15:15 24:24 28:28 48:48	4:1	□:Positive logic N:Negative logic	□:NC F:With EMI filter module	□:None HC: H=0.670" Horizontal, 7G-0058A-F		

(1) EMI filter meet EN55022 Class B.  
This EMI filter is used for WAD150-24S□□W and WAD150-48S□□W only, not for other items. (Ex: WAD150-24S24W-F)

**INPUT SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit	
Operating input voltage range	24Vin(nom)		9	24	36	VDC	
	48Vin(nom)		18	48	75		
	110Vin(nom)		43	110	160		
Start-up voltage	24Vin(nom)				9	VDC	
	48Vin(nom)				18		
	110Vin(nom)				43		
Shutdown voltage	24Vin(nom)		7.9		8.5	VDC	
	48Vin(nom)		15.6		16.8		
	110Vin(nom)		33.0		36.0		
Start up time	Constant resistive load	Power up Remote ON/OFF		35 35		ms	
Input surge voltage	1 second, max.	24Vin(nom)			50	VDC	
		48Vin(nom)			100		
		110Vin(nom)			185		
Input filter				Pi type			
Remote ON/OFF	Referred to –Vin pin	Positive logic (Standard)	DC-DC ON		Open or 3 ~ 12VDC		
			DC-DC OFF		Short or 0 ~ 1.2VDC		
		Negative logic (Option)	DC-DC ON		Short or 0 ~ 1.2VDC		
			DC-DC OFF		Open or 3 ~ 12VDC		
		Input current of Ctrl pin		-0.5		1	mA
		Remote off input current		3.5		mA	

**OUTPUT SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2	%
Load regulation	No Load to Full Load		-0.4		+0.4	%
Voltage adjustability	Use a resistor across on the Trim1 and Trim2 to adjust the output voltage.				+20	%
Ripple and noise	Measured by 20MHz bandwidth			100		mVp-p
		12Vout, 15Vout		200		
		24Vout, 28Vout		350		
		48Vout				
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			200		µs
Over voltage protection	% of Vout(nom); Hiccup mode		125		140	%
Over load protection	% of Iout rated; CC Mode		105		120	%
Short circuit protection			Continuous, automatic recovery			

**GENERAL SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	2250			VDC
		Input (Output) to Case	1600			
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					3500	pF
Switching frequency	24VDC input	48Vout	248	275	303	kHz
		Others	270	300	330	
	48VDC input	48Vout	248	275	303	
		Others	270	300	330	
	110VDC input	All	203	225	248	
Safety approvals						UL60950-1 EN60950-1 IEC60950-1
Case material						Aluminum
Base material						Aluminum
Potting material						Silicone (UL94 V-0)
Weight	WAF150					225g (7.94oz.)
	WAD150					220g (7.76oz.)
MTBF	MIL-HDBK-217F, Full load					4.954 x 10 <sup>5</sup> hrs

## ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating case temperature		-40		+100	°C
Maximum case temperature			+100		
Over temperature protection			+110		°C
Storage temperature range		-55		+125	°C
Thermal impedance <sup>(1)</sup>	Vertical direction by natural convection (20LFM) Only mount on the iron base-plate Mount on the iron base-plate and top side with 7G-0058A Heat-sink		2.55 2.0		°C/W
Thermal shock					MIL-STD-810F
Shock					EN61373, MIL-STD-810F
Vibration					EN61373, MIL-STD-810F
Relative humidity					5% to 95% RH

## EMC SPECIFICATIONS


Parameter	Conditions	Level	
EMI <sup>(2)</sup>	EN55011, EN55022	DC-DC module	Class A
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV		Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m		Perf. Criteria A
Fast transient <sup>(3)</sup>	EN61000-4-4 ± 2kV		Perf. Criteria A
Surge <sup>(3)</sup>	EN61000-4-5 EN55024 ±1kV and EN50155 ±2kV		Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s		Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second		Perf. Criteria A

### Note:


- (1)The iron base-plate dimension is 19" \* 3.5" \* 0.063" (The height is EIA standard 2U).  
(2)The heat-sink is optional and P/N is 7G-0058A-F.
- The standard module meets EMI Class A without external components.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
The filter capacitor Power Mate suggest: WAF(D)150-24S□□W : Nippon chemi-con KY series, 470μF/50V.  
WAF(D)150-24S□□W :: Nippon chemi-con KY series, 220μF/100V.  
WAF(D)150-110S□□W : Nippon chemi-con KXJ series, 150μF/200V.

**CAUTION:** This power module is not internally fused; an input line fuse must always be used. If the load was having sourcing capability (Ex: Battery or Super Capacitor), an output line fuse must always be used.


## CHARACTERISTIC CURVE

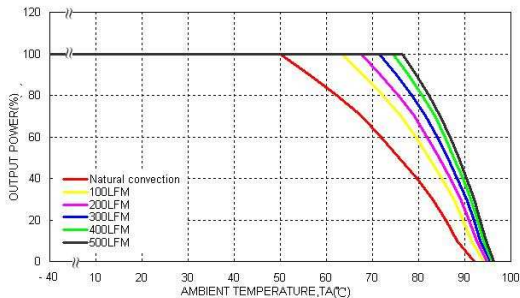


WAF(D)150-48S24W Derating Curve (Note 1)

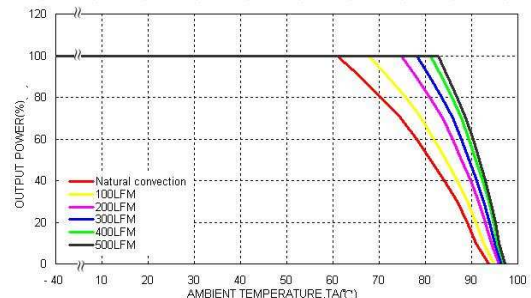

WAF(D)150-48S24W Derating Curve (Note 1)  
With Heat-sink





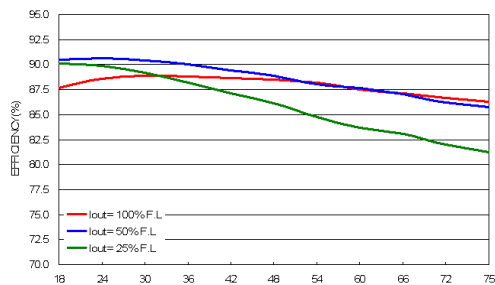


WAF(D)150-48S24W Efficiency vs. Input Voltage

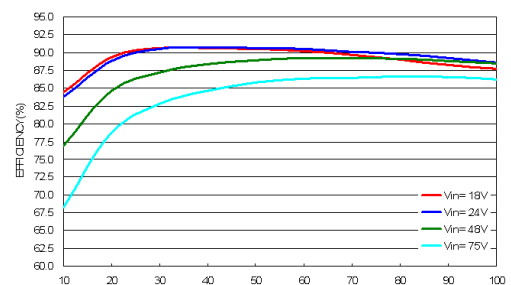

WAF(D)150-48S24W Efficiency vs. Output Load


**CHARACTERISTIC CURVE (CONTINUED)**

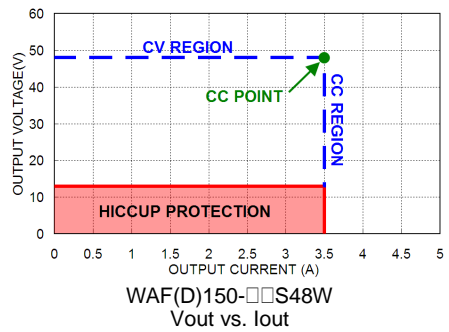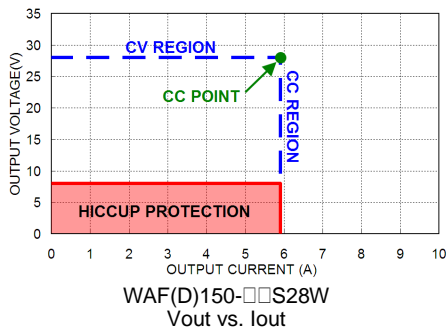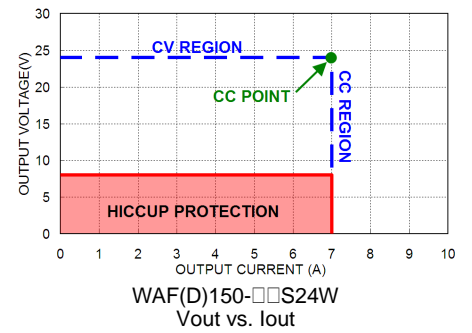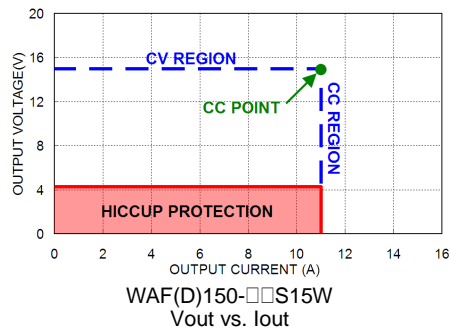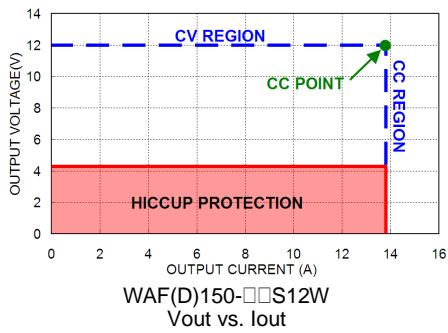


MODE	DESCRIPTION	CONDITION
CV Region	In normal operation. The output current in datasheet	Resistance Load > Vout / Iout (CC Point)
CC Region	If the output load current are over rating. The output current will keep in a constant value. And output voltage will fall.	Resistance Load < Vout / Iout (CC Point)
Hiccup Protection	If the output resistance is become short. It will operate in hiccup protection.	<p>WAF(D)150-□□S12W, WAF(D)150-□□S15W: Vout &lt; 4.3V (typ.) to Output Short.</p> <p>WAF(D)150-□□S24W, WAF(D)150-□□S28W: Vout &lt; 8.0V(typ.) to Output Short.</p> <p>WAF(D)150-□□S48W: Vout &lt; 13V(typ.) to Output Short.</p>

**MECHANICAL DRAWING**

**WAF**

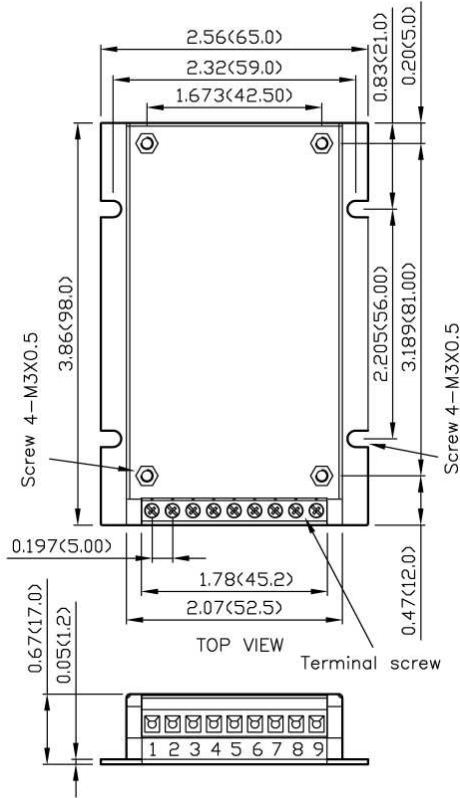

**WAD**

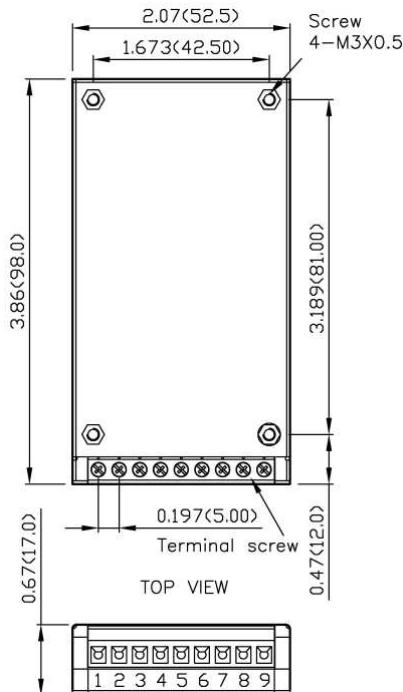


**TERMINAL CONNECTION**

PIN	DEFINE	WIRE GAUGE RECOMMENDATIONS
1	+Vin	14~16AWG
2	+Vin	14~16AWG
3	-Vin	14~16AWG
4	-Vin	14~16AWG
5	Ctrl	14~24AWG
6	+Vout	14~16AWG
7	-Vout	14~16AWG
8	Trim 1	14~24AWG
9	Trim 2	14~24AWG

**EXTERNAL OUTPUT TRIMMING**


Output can be externally trimmed by using the method shown below.



1. All dimensions in inch (mm)
2. Tolerance :x.xxx±0.02 (x.x±0.5)  
x.xxx±0.01 (x.xx±0.25)
3. Pole pitch tolerance ±0.01 (0.25)
4. Screw locked torque: MAX 5.0kgf-cm(0.49N-m)
5. Terminal screw locked torque:  
MAX 2.5kgf-cm(0.25N-m)

**MECHANICAL DRAWING (CONTINUED)**

WAD150-24S□□W-F  
WAD150-48S□□W-F

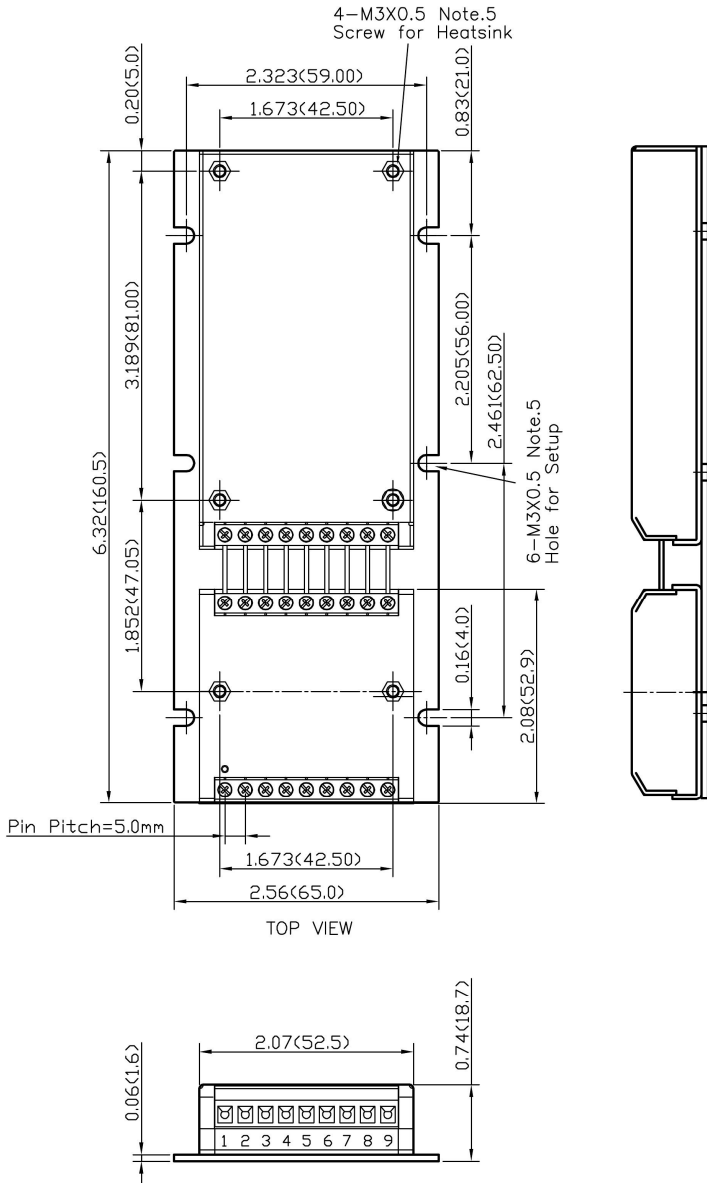


**TERMINAL CONNECTION**

PIN	DEFINE	WIRE GAUGE RECOMMENDATIONS
1	+Vin	14~16AWG
2	+Vin	14~16AWG
3	-Vin	14~16AWG
4	-Vin	14~16AWG
5	Ctrl	14~24AWG
6	+Vout	14~16AWG
7	-Vout	14~16AWG
8	Trim 1	14~24AWG
9	Trim 2	14~24AWG

**EXTERNAL OUTPUT TRIMMING**


Output can be externally trimmed by using the method shown below.



1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)  
x.xxx±0.01 (x.xx±0.25)
3. Pole pitch tolerance ±0.01 (0.25)
4. Screw locked torque: MAX 5.0kgf-cm(0.49N-m)
5. Terminal screw locked torque:  
MAX 2.5kgf-cm(0.25N-m)

**HEAT-SINK OPTION**

Heat-sink Part No: 7G-0058A-F, Suffix:-HC

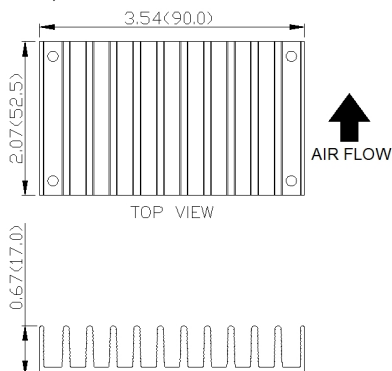

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)  
x.xxx±0.01 (x.xx±0.25)