
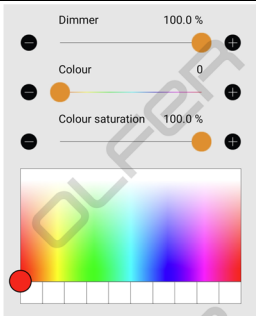

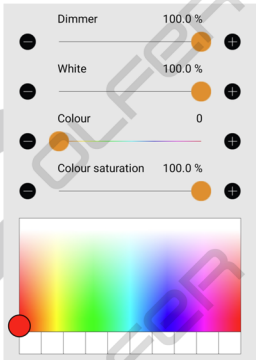

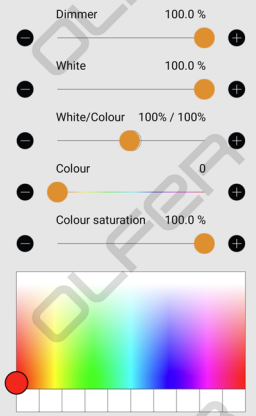

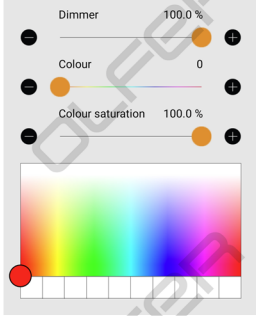

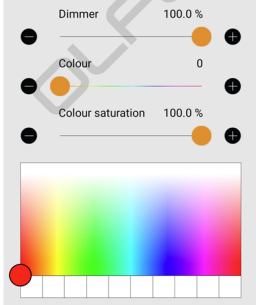




Type	Profile				Description	Manual App Control	
	Fixture ID	Model / Name	Icon	Fixture mode			
DALI	15037**	DALI Lin* Broadcast		DALI/BC/Dim{OHI,H WTemp}	DALI Broadcast. Linear dimming curve. DALI power-on level 0%.	Dimmer: BC	
	23670	DALI Lin* Broadcast (New)		DALI/BC/Dim{OHI,H WTemp}	DALI Broadcast. Linear dimming curve. Driver memory power-on level.	Dimmer: BC	
	23668	DALI Lin* BC +Ext.Sensors		DALI/BC/Dim{OHI,H WTemp,Presence,Da ylight}	DALI Broadcast. Linear dimming curve. External DALI-2 motion and light sensor connected to the DALI bus will appear as a Casambi sensor in the App.	Dimmer: BC	
	14935	DALI Log Broadcast		DALI/BC/Dim{OHI,H WTemp}	DALI Broadcast. Logarithmic dimming curve. DALI power-on level 0%.	Dimmer: BC	
	14933	DALI Lin* (4xGroup)		DALI/4ch/Dim,Dim,Dim,Dim{OHI,HWTemp }	DALI Broadcast 4xGroup. Linear dimming curve. Controls DALI groups. Driver power-on level 0%.	Dimmer 1: G0 Dimmer 2: G1 Dimmer 3: G2 Dimmer 4: G3	
	21717	DALI Lin* (6xGroup)		DALI/Elements{OHI,H WTemp}	DALI Broadcast 6xGroup. Linear dimming curve. Controls DALI groups. Driver memory power-on level.	GROUP#0: G0 GROUP#1: G1 GROUP#2: G2 GROUP#3: G3 GROUP#4: G4 GROUP#5: G5	
	14936	DALI Log (4xGroup)		DALI/4ch/Dim,Dim,Dim,Dim{OHI,HWTemp }	DALI Broadcast 4xGroup. Logarithmic dimming curve. Controls DALI groups.	Dimmer 1: G0 Dimmer 2: G1 Dimmer 3: G2 Dimmer 4: G3	
	19462	DALI Lin* DT6 TW 2.2-6K SA		DALI/2ch/Dim,TW{O HI,HWTemp}	DALI DT6 Tunable white. Linear dimming curve. Automatic DALI addressing. Driver power-on level 100%. Warm: address A0 Cool: address A1	Dimmer: A0+A1 Colour temperature: Warm (2200K) / cool (6000K) mixer	
	19869	DALI Lin* DT6 TW 2.2-3K SA		DALI/2ch/Dim,TW{O HI,HWTemp}	DALI DT6 Tunable white. Linear dimming curve. Automatic DALI addressing. Driver power-on level 100%. Warm: address A0 Cool: address A1	Dimmer: A0+A1 Colour temperature: Warm (2200K) / cool (3000K) mixer	
	17780	DALI Lin* DT6 RGB SA		DALI/3ch/Dim,RGB{ OHI,HWTemp}	DALI DT6 RGB. Linear dimming curve. Automatic DALI addressing. Driver power-on level 0%. Red: address A0 Green: address A1 Blue: address A2	Dimmer: Red/green/blue dimming control Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	


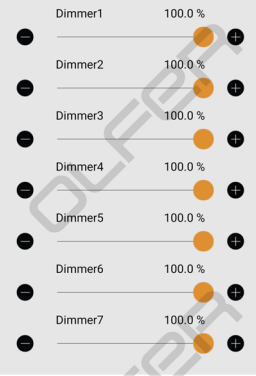

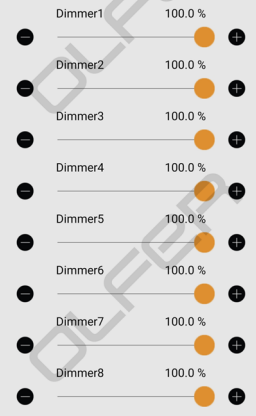



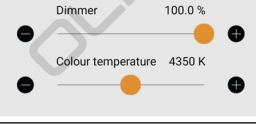

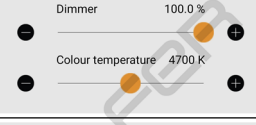

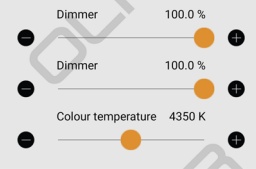

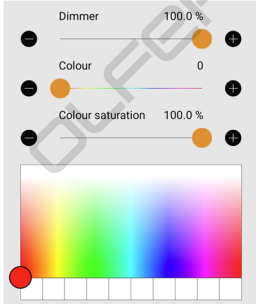


17781	DALI Log DT6 RGB SA		DALI/3ch/Dim,RGB{OHI,HWTemp}	DALI DT6 RGB. Logarithmic dimming curve. Automatic DALI addressing. Driver power-on level 0%. Red: address A0 Green: address A1 Blue: address A2	Dimmer: Red/green/blue dimming control Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	
21087	DALI Lin* DT6 RGBW SA		DALI/4ch/Dim,RGBW{OHI,HWTemp}	DALI DT6 RGBW. Linear dimming curve. Dedicated slider for White. Automatic DALI addressing. Driver power-on level 0%. Red: address A0 Green: address A1 Blue: address A2 White: address A3	Dimmer: Red/green/blue/white dimming control White: white channel dimming control Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color (doesn't affect the white channel) Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	
22239	DALI Lin* DT6 RGB/W+W SA		DALI/5ch/Dim,RGB/W+W [Evolution]{OHI,HWTemp}	DALI RGB/W+W Short Address. Linear dimming curve. White/Colour balance slider + Dedicated slider for additional White channel. Automatic DALI addressing. Driver memory power-on level. Red: address A0 Green: address A1 Blue: address A2 White (White/colour slider): address A3 White (independent slider): address A4	Dimmer: Red/green/blue/2whites dimming control White: white channel dimming control (A4) White/Colour: Balance between the white channel (A3) and the RGB mix Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color (doesn't affect the white channel) Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	
17782	DALI Lin* RGB (3xGroup)		DALI/3ch/Dim,RGB{OHI,HWTemp}	DALI DT6 RGB. Linear dimming curve. Each channel is controlled via DALI Group addresses. Driver power-on level 0%. Red: Group 0 Green: Group 1 Blue: Group 2	Dimmer: Red/green/blue dimming control Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	
17784	DALI Log RGB (3xGroup)		DALI/3ch/Dim,RGB{OHI,HWTemp}	DALI DT6 RGB. Logarithmic dimming curve. Each channel is controlled via DALI Group addresses. Driver power-on level 0%. Red: Group 0 Green: Group 1 Blue: Group 2	Dimmer: Red/green/blue dimming control Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	


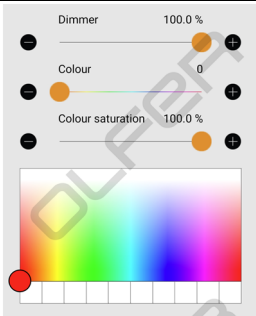

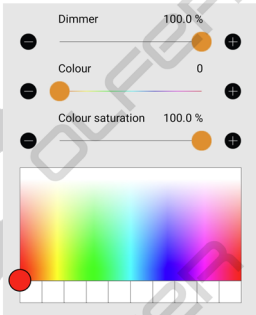

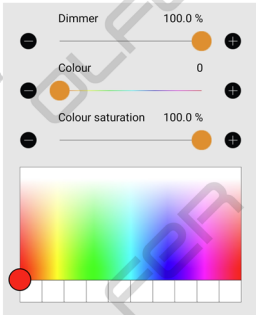

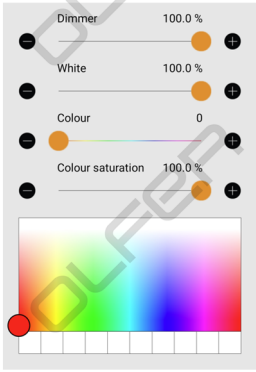

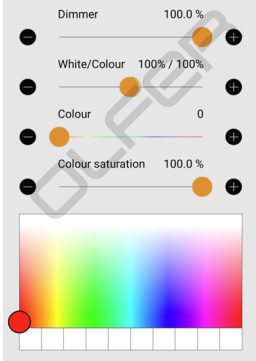


18726	DALI Lin* DT6 2x(R,G,B,W) SA		DALI/Elements{OHI,H WTemp}	DALI DT6 RGB, Linear dimming curve. Individual sliders for each colour of two RGBW sets. Driver power-on level 0%. Red 1: address A0 Green 1: address A1 Blue 1: address A2 White 1: address A3 Red 2: address A4 Green 2: address A5 Blue 2: address A6 White 2: address A7	RED 1: A0 GREEN 1: A1 BLUE 1: A2 WHITE 1: A3 RED 2: A4 GREEN 2: A5 BLUE 2: A6 WHITE 2: A7	
26196	DALI Lin* DT6 1xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 1xDimmer. Linear dimming curve. Automatic DALI addressing. Driver memory power-on level.	Dimmer: BC	
20323	DALI Lin* DT6 2xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 2xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Driver memory power-on level.	Dimmer 1: A0 Dimmer 2: A1	
22616	DALI Lin* DT6 2xDIM SA+ Ext. Presence		DALI/Elements{OHI,H WTemp,Presence}	DALI DT6 2xDimmers. Linear dimming curve. External DALI-2 motion sensor connected to the DALI bus will appear as a Casambi sensor in the App. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Driver memory power-on level.	Dimmer 1: A0 Dimmer 2: A1	
20325	DALI Lin* DT6 3xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 3xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Driver memory power-on level.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2	
20254	DALI Lin* DT6 4xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 4xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Driver memory power-on level.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3	
21367	DALI Lin* DT6 5xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 5xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Driver memory power-on level.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3 Dimmer 5: A4	
20322	DALI Lin* DT6 6xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 6xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Driver memory power-on level.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3 Dimmer 5: A4 Dimmer 6: A5	



	21936	DALI Lin* DT6 7xDIM SA		DALI/Elements{OHI,HWTemp}	DALI DT6 7xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Driver memory power-on level.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3 Dimmer 5: A4 Dimmer 6: A5 Dimmer 7: A6	
	20324	DALI Lin* DT6 8xDIM SA		DALI/Elements{OHI,HWTemp}	DALI DT6 8xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Driver memory power-on level.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3 Dimmer 5: A4 Dimmer 6: A5 Dimmer 7: A6 Dimmer 8: A7	
DALI DT8	21737	DALI Lin* DT8 TW 1.8-3K BC		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white, Broadcast. Linear dimming curve. Driver memory power-on level.	Dimmer: BC Colour temperature: warm (1800K) / cool (3000K) mixer	
	14934	DALI Lin* DT8 TW 2.7-6K BC		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Broadcast. Linear dimming curve. Driver power-on level 0%.	Dimmer: BC Colour temperature: warm (2700K) / cool (6000K) mixer	
	14937	DALI Log DT8 TW 1.5-7.9K BC		DALI/DT8/Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Broadcast. Logarithmic dimming curve. Driver power-on level 0%.	Dimmer: BC Colour temperature: warm (1500K) / cool (7900K) mixer	
	18626	DALI Lin* DT8 2xTW 2.7-6K SA		DALI/DT8/Dim,Dim,TW{OHI,HWTemp}	DALI DT8 Tunable white. Linear dimming curve. One CCT control. Two brightness controls. Driver power-on level 0%.	Dimmer 1: A0 Dimmer 2: A1 Colour temperature: warm (2700K) / cool (6000K) mixer	
	17777	DALI Lin* DT8 RGB BC		DALI/DT8/Dim,RGB{OHI,HWTemp}	DALI DT8 RGB Broadcast. Linear dimming curve. Driver power-on level 0%.	Dimmer: Red/green/blue dimming control Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	



17776	DALI Log DT8 RGB BC		DALI/DT8/Dim,RGB{OHI,HWTemp}	DALI DT8 RGB Broadcast. Logarithmic dimming curve. Driver power-on level 0%.	<p>Dimmer: Red/green/blue dimming control</p> <p>Colour: Red/green/blue mixer</p> <p>Colour saturation: Grade of purity of the current color</p> <p>Palette: Red/green/blue mix (horizontal) + saturation (vertical)</p> <p>Saved colours: Up to 10</p>	
17778	DALI Lin* DT8 RGB SA		DALI/DT8/Dim,RGB{OHI,HWTemp}	DALI DT8 RGB Short address. Linear dimming curve. Controls address A0. Driver power-on level 0%.	<p>Dimmer: Red/green/blue dimming control</p> <p>Colour: Red/green/blue mixer</p> <p>Colour saturation: Grade of purity of the current color</p> <p>Palette: Red/green/blue mix (horizontal) + saturation (vertical)</p> <p>Saved colours: Up to 10</p>	
17779	DALI Log DT8 RGB SA		DALI/DT8/Dim,RGB{OHI,HWTemp}	DALI DT8 RGB Short address. Logarithmic dimming curve. Controls address A0. Driver power-on level 0%.	<p>Dimmer: Red/green/blue/ dimming control</p> <p>Colour: Red/green/blue mixer</p> <p>Colour saturation: Grade of purity of the current color</p> <p>Palette: Red/green/blue mix (horizontal) + saturation (vertical)</p> <p>Saved colours: Up to 10</p>	
21105	DALI Lin* DT8 RGBW BC		DALI/DT8/Dim,RGBW {OHI,HWTemp}	DALI DT8 RGBW. Broadcast. Linear dimming curve. Dedicated slider for White colour. Driver memory power-on level.	<p>Dimmer: Red/green/blue/white dimming control</p> <p>White: white channel dimming control</p> <p>Colour: Red/green/blue mixer</p> <p>Colour saturation: Grade of purity of the current color (doesn't affect the white channel)</p> <p>Palette: Red/green/blue mix (horizontal) + saturation (vertical)</p> <p>Saved colours: Up to 10</p>	
22234	DALI Lin* DT8 RGB/W BC		DALI/DT8/Dim,RGB/White [Evolution]{OHI,HWTemp}	DALI DT8 RGB/W. Broadcast. Linear dimming curve. White/Colour balance slider. Driver memory power-on level.	<p>Dimmer: Red/green/blue/white dimming control</p> <p>White/Colour: Balance between the white channel and the RGB mix</p> <p>Colour: Red/green/blue mixer</p> <p>Colour saturation: Grade of purity of the current color (doesn't affect the white channel)</p> <p>Palette: Red/green/blue mix (horizontal) + saturation (vertical)</p> <p>Saved colours: Up to 10</p>	


** Default profile



Additional Information

Summary of some terms and abbreviations that have been used throughout the document.

Abbreviation:	Description:
A0, A1, A2, ...	DALI short address.
G0, G1, G2, ...	DALI group address.
BC	Broadcast.
SA	Short Address
Lin*	Optimized linear dimming curve.
Log	Logarithmic dimming curve.

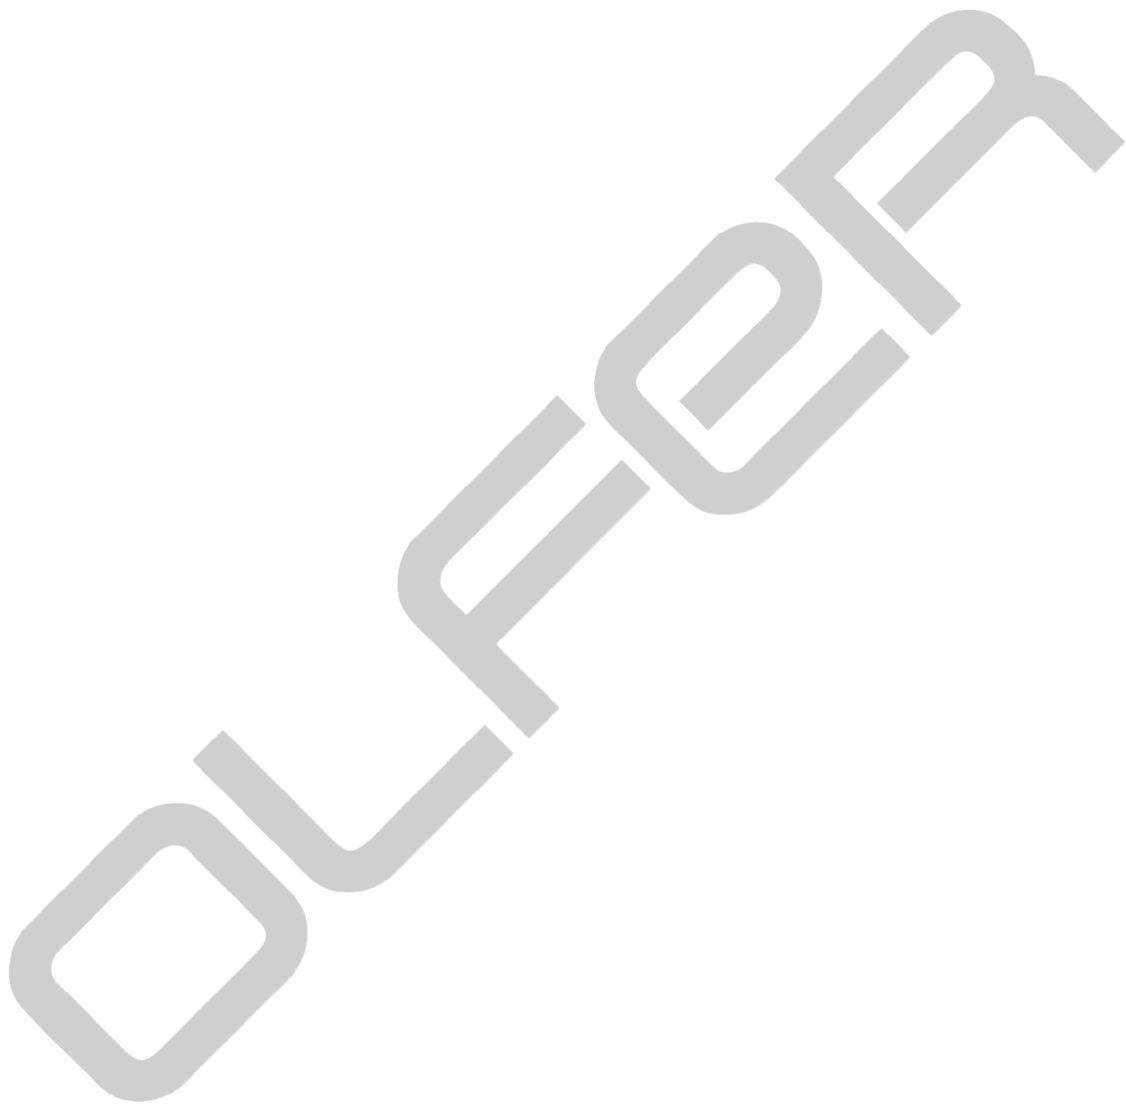



Revision history

Date:	Version:	Description:
26/09/2023	1.0	Initial release.

