





























- · Global certificates
- · 450W peak power(3 sec.)
- Universal AC input / Full range
- · 2 pole AC inlet IEC320-C18, Class II power unit
- · Built-in active PFC function
- No load power consumption<0.5W
- Energy efficiency Level VI
- · Comply with international energy-saving standards
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design with -30~+70°C working temperature
- · Fully enclosed plastic case
- · LED indicator for power on
- 3 years warranty













Applications

- · Consumer electronic devices
- Telecommunication devices
- · Office facilities
- Industrial equipments
- · 3D printer
- · Game console
- Vision mixer
- Power sourcing equipment of PoE

GTIN CODE


MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

GST360B is a highly reliable, 360W desktop style single-output green adaptor series. This product is a class II power unit (without FG), equipped with a standard IEC320-C18 AC inlet and adopting the input range from 85 VAC to 264VAC. The entire series supplies different models with output voltages ranging between 12VDC and 55VDC that can satisfy the demands for various types of consumer electronic devices.

With the efficiency up to 95.0% and the extremely low no-load power consumption below 0.5W, GST360B is compliant with USA EISA 2007/DoE, Canada NRCan. The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case. GST360B is certified for the international safety regulations.

Model Encoding

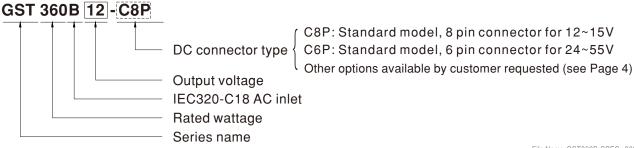



| ORDER NO | • | GST360B12-C8P | GST360B15-C8P | GST360B24-C6P | GST360B36-C6F | GST360B48-C6P | GST360B55-C6 | | |
|-----------------------------|---|--|--|---|-------------------|--|---|--|--|
| | SAFETY MODEL NO. | GST360B12 | GST360B15 | GST360B24 | GST360B36 | GST360B48 | GST360B55 | | |
| | DC VOLTAGE Note | | 15V | 24V | 36V | 48V | 55V | | |
| | RATED CURRENT | | 22.7A | 15A | 10A | 7.5A | 6.55A | | |
| ОИТРИТ | CURRENT RANGE | | 0 ~ 22.7A | 0 ~ 15A | 0 ~ 10A | 0 ~ 7.5A | 0 ~ 6.55A | | |
| | Rated (max.) | 330W | 340.5W | 360W | 360W | 360W | 360W | | |
| | POWER | 415W | 425W | 450W | 450W | 450W | 450W | | |
| | Peak (3sec.) RIPPLE & NOISE (max.) Note | | 120mVp-p | 200mVp-p | 200mVp-p | 200mVp-p | 200mVp-p | | |
| | VOLTAGE TOLERANCE Note | · · · · | ±5.0% | ±3.0% | ±2.0% | ±2.0% | ±2.0% | | |
| | | | | | | | | | |
| | LINE REGULATION Note | | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | | |
| | LOAD REGULATION | ±5.0% | ±5.0% | ±3.0% | ±2.0% | ±2.0% | ±2.0% | | |
| | - | 6 2000ms, 50ms / 230V/ | | ns / 115VAC at full loa | ad | | | | |
| | HOLD UP TIME (Typ.) | 8ms / 230VAC 8ms / 115VAC at full load | | | | | | | |
| | | 85 ~ 264VAC 120 ~ 370VDC | | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | |
| | POWER FACTOR (Typ.) | PF>0.95 / 230VAC | PF>0.98 / 115VAC | at full load | | | | | |
| NPUT | EFFICIENCY (Typ.) | 91% | 92% | 93% | 94% | 95% | 95% | | |
| | AC CURRENT (Typ.) | 3.8A / 115VAC 2 | A / 230VAC | | | | | | |
| | INRUSH CURRENT (max.) | Cold start 95A / 115V | AC 120A / 230VA | С | | | | | |
| | LEAKAGE CURRENT(max.) | 1.5mA / 240VAC | | | | | | | |
| | | 135 ~ 155% rated out | put power | | | | | | |
| | OVERLOAD | Protection type : Hiccup mode, recovers automatically after fault condition is removed for 12 ~ 36V | | | | | | | |
| | | | | e-power on to recove | r for 48V and 55V | | | | |
| PROTECTION | OVER VOLTAGE | | 105 ~ 135% rated output voltage | | | | | | |
| | | | Protection type : Shut down o/p voltage, re-power on to recover | | | | | | |
| | OVER TEMPERATURE | Shut down o/p voltage | • | over | | | | | |
| | WORKING TEMP. | -30 ~ +70°C (Refer to | -30 ~ +70°C (Refer to "Derating Curve") | | | | | | |
| | WORKING HUMIDITY | 20% ~ 90% RH non-condensing | | | | | | | |
| | STORAGE TEMP., HUMIDITY | $-40 \sim +85^{\circ}\text{C}$, $10 \sim 95\%$ RH non-condensing | | | | | | | |
| NVIRONMENT | TEMP. COEFFICIENT | ±0.03% / °C (0~35°C) | | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | | | | |
| | OPERATING ALTITUDE Note. | 5000 meters | | | | | | | |
| | OVER VOLTAGE CATEGORY | II; According to UL62368-1, BS EN/EN62368-1; altitude up to 5000 meters | | | | | | | |
| | SAFETY STANDARDS | UL62368-1, CSA C22.2 No.62368-1, Dekra BS EN/EN62368-1,IEC 61558-1,IEC 61558-2-16, AS/NZS 61558-1/-2-16, EAC TP TC 004 approved | | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P: 3KVAC | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / | 500VDC / 25°C / 70% | RH | | | | | |
| | | Parameter | Standard | | | Test Level / Note | | | |
| | EMC EMISSION | Conducted emission | | 55032(CISPR32),FCC 3(B)/NMB-3(B),EAC T | | PR22 Class B | | | |
| | | | BS EN/ENS | BS EN/EN55032(CISPR32),FCC PART 15 / CISPR22 Class B CAN ICES-3(B)/NMB-3(B),EAC TP TC 020 | | | | | |
| SAFFTY & | | Radiated emission | | 3(B)/NMB-3(B).EAC T | P TC 020 | | | | |
| SAFETY & | | Radiated emission Harmonic current | | . , . , . , | P TC 020 | Class A | | | |
| MC | | | CAN ICES- BS EN/EN6 | 61000-3-2 | P TC 020 | Class A | | | |
| MC | | Harmonic current Voltage flicker | CAN ICES- BS EN/EN6 BS EN/EN6 | 61000-3-2 | P TC 020 | | | | |
| MC | | Harmonic current Voltage flicker Parameter | BS EN/EN6 BS EN/EN6 Standard | 51000-3-2 51000-3-3 | P TC 020 | Test Level /Note | el 4. 8KV contact | | |
| SAFETY & EMC Note. 9) | | Harmonic current Voltage flicker Parameter ESD | CAN ICES- BS EN/EN6 BS EN/EN6 Standard BS EN/EN6 | 31000-3-2 31000-3-3 31000-4-2 | P TC 020 | Test Level /Note Level 4, 15KV air; Level | el 4, 8KV contact | | |
| MC | | Harmonic current Voltage flicker Parameter ESD RF field susceptibility | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG BS EN/ENG | 51000-3-2 51000-3-3 51000-4-2 51000-4-3 | P TC 020 | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m | el 4, 8KV contact | | |
| MC | EMC IMMUNITY | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts | CAN ICES- BS EN/EN6 BS EN/EN6 Standard BS EN/EN6 BS EN/EN6 | 51000-3-2 51000-3-3 51000-4-2 51000-4-3 51000-4-4 | P TC 020 | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV | | | |
| EMC | EMC IMMUNITY | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility | CAN ICES- BS EN/EN6 BS EN/EN6 Standard BS EN/EN6 BS EN/EN6 BS EN/EN6 BS EN/EN6 | \$1000-3-2 \$1000-3-3 \$1000-4-2 \$1000-4-3 \$1000-4-4 \$1000-4-5 | P TC 020 | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li | | | |
| MC | EMC IMMUNITY | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility Conducted susceptibility | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG BS EN/ENG BS EN/ENG BS EN/ENG BS EN/ENG BS EN/ENG | \$1000-3-2 \$1000-3-3 \$1000-4-2 \$1000-4-3 \$1000-4-4 \$1000-4-5 \$1000-4-6 | P TC 020 | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li Level 2, 3V | | | |
| MC | EMC IMMUNITY | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG BS EN/ENG BS EN/ENG BS EN/ENG BS EN/ENG BS EN/ENG | \$1000-3-2 \$1000-3-3 \$1000-4-2 \$1000-4-3 \$1000-4-4 \$1000-4-5 \$1000-4-6 | P TC 020 | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li Level 2, 3V Level 2, 3A/m | ne | | |
| MC | EMC IMMUNITY | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility Conducted susceptibil Magnetic field immuni Voltage dips , interrup | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG | \$1000-3-2 \$1000-3-3 \$1000-4-2 \$1000-4-3 \$1000-4-4 \$1000-4-5 \$1000-4-6 \$1000-4-8 | | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li Level 2, 3V Level 2, 3A/m >95% dip 0. 5 periods >95% interruptions 2 | ne s, 30% dip 25 perio 50 periods | | |
| MC | EMC IMMUNITY | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility Conducted susceptibil Magnetic field immuni | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG | \$1000-3-2 \$1000-3-3 \$1000-4-2 \$1000-4-3 \$1000-4-4 \$1000-4-5 \$1000-4-6 \$1000-4-8 | | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li Level 2, 3V Level 2, 3A/m >95% dip 0. 5 periods | ne s, 30% dip 25 perio 50 periods | | |
| MC Note. 9) | | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility Conducted susceptibil Magnetic field immuni Voltage dips , interrup | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG Telcordia SR-332 | \$1000-3-2 \$1000-3-3 \$1000-4-2 \$1000-4-3 \$1000-4-4 \$1000-4-5 \$1000-4-6 \$1000-4-8 | | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li Level 2, 3V Level 2, 3A/m >95% dip 0. 5 periods >95% interruptions 2 | ne s, 30% dip 25 perio 50 periods | | |
| MC Note. 9) | МТВБ | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility Conducted susceptibil Magnetic field immuni Voltage dips , interrup 3838.3K hrs min. | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG Telcordia SR-332 | \$1000-3-2 \$1000-3-3 \$1000-4-2 \$1000-4-3 \$1000-4-4 \$1000-4-5 \$1000-4-6 \$1000-4-8 | | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li Level 2, 3V Level 2, 3A/m >95% dip 0. 5 periods >95% interruptions 2 | ne s, 30% dip 25 perio 50 periods | | |
| EMC Note. 9) | MTBF DIMENSION | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility Conducted susceptibil Magnetic field immuni Voltage dips , interrup 3838.3K hrs min. 220*95*46mm (L*W*H | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG Telcordia SR-332 B) 2CUFT | 31000-3-2 31000-3-3 31000-4-2 31000-4-3 31000-4-4 31000-4-5 31000-4-6 31000-4-8 31000-4-11 | | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li Level 2, 3V Level 2, 3A/m >95% dip 0. 5 periods >95% interruptions 2 | ne s, 30% dip 25 perio 50 periods | | |
| MC Note. 9) | MTBF DIMENSION PACKING | Harmonic current Voltage flicker Parameter ESD RF field susceptibility EFT bursts Surge susceptibility Conducted susceptibil Magnetic field immuni Voltage dips , interrup 3838.3K hrs min. 220*95*46mm (L*W*H 1.4Kg; 8pcs/12Kg/0.8 | CAN ICES- BS EN/ENG BS EN/ENG Standard BS EN/ENG Telcordia SR-332 B) 2CUFT be available by custor | 51000-3-2 51000-3-3 51000-4-2 51000-4-3 51000-4-4 61000-4-5 51000-4-6 51000-4-8 51000-4-11 (Bellcore); 557 | | Test Level /Note Level 4, 15KV air; Level Level 2, 3V/m Level 2, 1KV Level 3, 1KV/Line-Li Level 2, 3V Level 2, 3A/m >95% dip 0. 5 periods >95% interruptions 2 | ne s, 30% dip 25 perio 50 periods | | |


- 4. Tolerance: includes set up tolerance, line regulation, load regulation.
- 5. Line regulation is measured from low line to high line at rated load.

NOTE

- 6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.
- 7. Derating may be needed under low input voltage. Please check the derating curve for more details.

 8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 9. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."
- (as available on http://www.meanwell.com) ** Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx



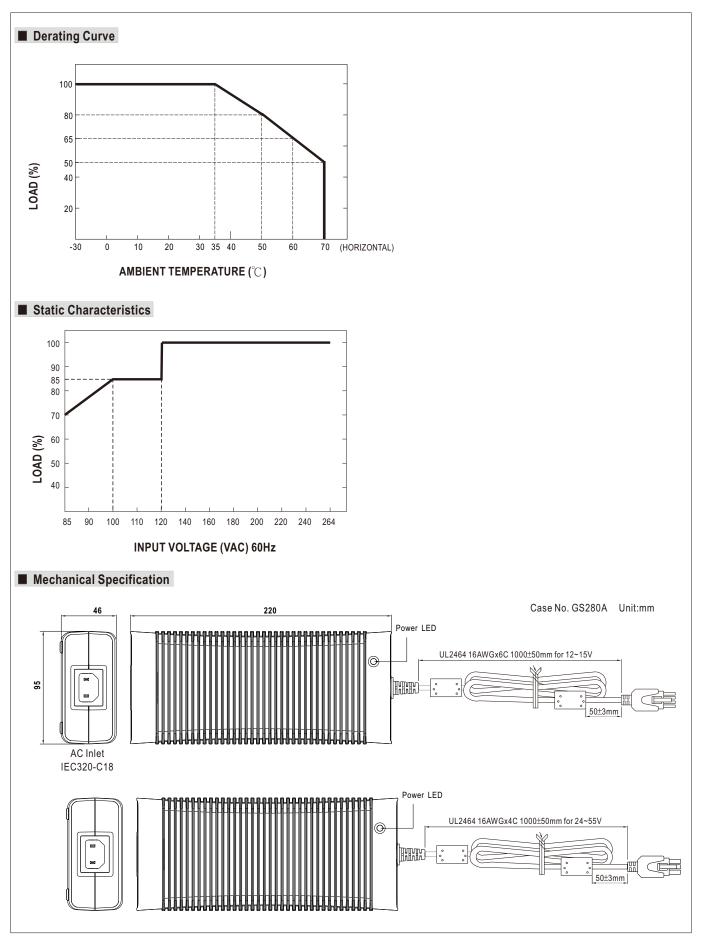



■ DC output plug

O Standard plug:

C8P: MOLEX 39-01-2080 equivalent for 12~15V

| C8P | Pin Assig | nment | |
|---------------------|--------------|---------|--------|
| | | PIN NO. | OUTPUT |
| 5678 | 5678 | 1,2,3,4 | +Vo |
| [1] [2] [3] [4] | [1][2][3][4] | 5,6,7,8 | -Vo |

C6P: MOLEX 39-01-2060 equivalent for 24~55V

| C6P | | | Pin Assignment | | | |
|-----|-------|--|----------------|---------|--------|--|
| | | | | PIN NO. | OUTPUT | |
| | 456 | | 456 | 1,2,3 | +Vo | |
| | 1 2 3 | | [1 2 3] | 4,5,6 | -Vo | |

Optional DC plug:

MIC4: NEUTRIK XLR NC4FX equivalen for 36~55V

| NIO 4 | | | Tuna Na | Pin Assignment | | |
|-------|---|----------|---------|----------------|-----|--|
| MIC4 | | Type No. | PIN No. | Output | | |
| | A | | | 1 | +Vo | |
| | | MIC4 | 2 | +Vo | | |
| | | | 3 | -Vo | | |
| | | | 4 | -Vo | | |

C4P: AMP 1-480702-0 (6.35mm) equivalent for 36~55V

| C4P | | | Type No | Pin Assignment | | |
|-----|------------------|-----|----------|----------------|--------|--|
| | | | Type No. | PIN No. | Output | |
| | | | | 1 | +Vo | |
| • | 4 3 2 1 | C4P | 2 | +Vo | | |
| | 2 1 | | U4F | 3 | -Vo | |
| | | | | 4 | -Vo | |

■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html