





























### Features

- Constant Voltage + Constant Current mode output
- Metal housing with class I design
- IP67 / IP65 rating for indoor or outdoor installations
- · Function options: output adjustable via potentiometer; 3 in 1 dimming
- Typical lifetime > 62000 hours
- 7 years warranty


# Applications

- LED street lighting
- LED high-bay lighting
- Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## Description

HLG-150H series is a 150W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-150H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for  $-40^{\circ}$ C  $\sim +90^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-150H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## Model Encoding

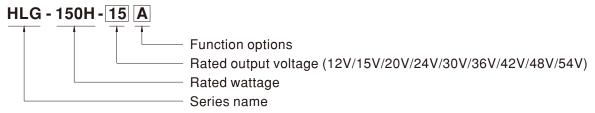

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request



#### **SPECIFICATION**


MODEL		HLG-150H-12	HLG-150H-15	HLG-150H-20	HLG-150H-24	HLG-150H-30	HLG-150H-36	HLG-150H-42	HLG-150H-48	HLG-150H-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
	RATED CURRENT	12.5A	10A	7.5A	6.3A	5A	4.2A	3.6A	3.2A	2.8A
	RATED POWER	150W	150W	150W	151.2W	150W	151.2W	151.2W	153.6W	151.2W
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
	() 10101	Adjustable for A/AB-Type only (via built-in potentiometer)								
ОИТРИТ	VOLTAGE ADJ. RANGE	10.8 ~ 13.5V		17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V
				nly (via built-ir			100	100 101	10 00 V	140 001
	CURRENT ADJ. RANGE	-	6 ~ 10A	4.5 ~ 7.5A	3.8 ~ 6.3A	3 ~ 5A	2.5 ~ 4.2A	2.16 ~ 3.6A	1.92 ~ 3.2A	1.68 ~ 2.8
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
				l .		⊥0.5%	⊥0.5/0		⊥0.5%	⊥0.5%
		1000ms,200n		500ms,200ms	/230VAC					
	HOLD UP TIME (Typ.)	16ms / 115VAC, 230VAC								
	VOLTAGE RANGE Note.5	90 ~ 305VAC	127 ~ 431							
		(Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR (Typ.)	PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC @ full load								
	TOWERTACTOR (Typ.)	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
INPUT	TOTAL HARMONIC DISTORTION	THD<20% (@ load≥60% / 115VAC,230VAC; @ load≥75% / 277VAC)								
	TOTAL HARMONIC DISTORTION	(Please refer	to "TOTAL HA	ARMONIC DIS	TORTION (TH	ID)" section)				
	EFFICIENCY (Typ.)	91.5%	92%	93%	93%	93.5%	93.5%	94%	94%	94%
	AC CURRENT (Typ.)	1.7A / 115VA	0.75A/	230VAC (	0.7A / 277VAC	1		·		'
	INRUSH CURRENT (Typ.)	COLD START 65A(twidth=425µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. No. of PSUs on 16A				. ,					
	CIRCUIT BREAKER	4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT	<0.75mA / 27	7VAC							
		95 ~ 108%								
	OVER CURRENT									
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed								
PROTECTION	SHOKT CIKCOTT	Constant current limiting, recovers automatically after fault condition is removed  14 ~ 17V								
	OVER VOLTAGE									
		Shut down o/p voltage with auto-recovery or re-power on to recovery								
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down  Tcase= -40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
	WORKING TEMP.			e refer to "OU"	TPUT LOAD v	s TEMPERATI	JRE" section)			
	MAX. CASE TEMP.	Tcase= +90°C								
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY									
	TEMP. COEFFICIENT	±0.03%/℃(	0 ~ 60°C)							
	VIBRATION	10 ~ 500Hz, 5	G 12min./1cyc	ele, period for 7	72min. each al	ong X, Y, Z axe	S			
		UL8750(type"HL"), CSA C22.2 No. 250.0-08; BS EN/EN 61347-1, BS EN/EN 61347-2-13, AS/NZS 61347-1 (except for AB-type),								
	SAFETY STANDARDS	AS/NZS 61347-2-13(except for AB-type) independent; GB19510.1, GB19510.14; IP65 or IP67; J61347-1, J61347-2-13(except for B,								
SAFETY & EMC		AB and D-type), BIS IS15885( for 12,24,36,54A/B only), EAC TP TC 004; KC61347-1, KC61347-2-13(except for D-type) approved								
	WITHSTAND VOLTAGE	I/P-O/P:3.75I	KVAC I/P-F	G:2KVAC O	/P-FG:1.5KVA	(C				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/70% RH								
							S EN/EN6100	0-3-2 Class C	(@ load≥60%	o):
	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class C (@ load ≥ 60%);   BS EN/EN61000-3-3,GB17743 and GB17625.1, EAC TP TC 020								
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020								
	MTBF	192.2K hrs mi	n. MIL-HDE	3K-217F (25°C)	)					
OTHERS	DIMENSION	228*68*38.8n								
h			s/14.8Kg/0.8Cl	JFT						
	PACKING									

#### NOTE

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance : includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.
- 9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 80 ℃ or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com.
- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf
- ※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx


### **■** BLOCK DIAGRAM

Fosc: 100KHz

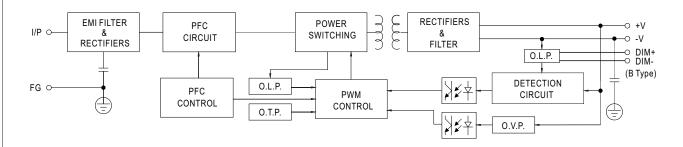

### ■ DRIVING METHODS OF LED MODULE

※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

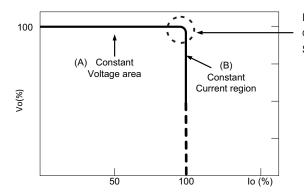

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




### ■ DIMMING OPERATION




### imes 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
  - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC

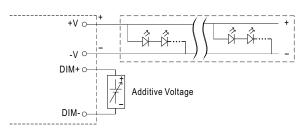


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

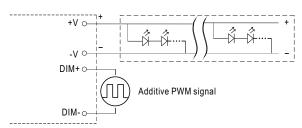



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

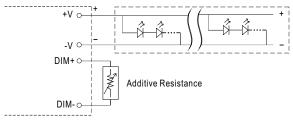


"DO NOT connect "DIM- to -V"








Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

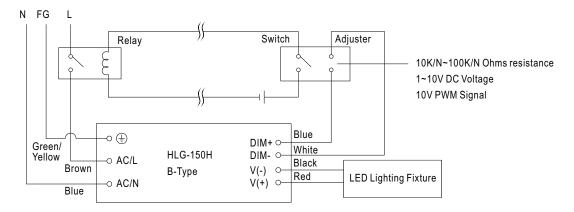


Using a switch and relay can turn ON/OFF the lighting fixture.



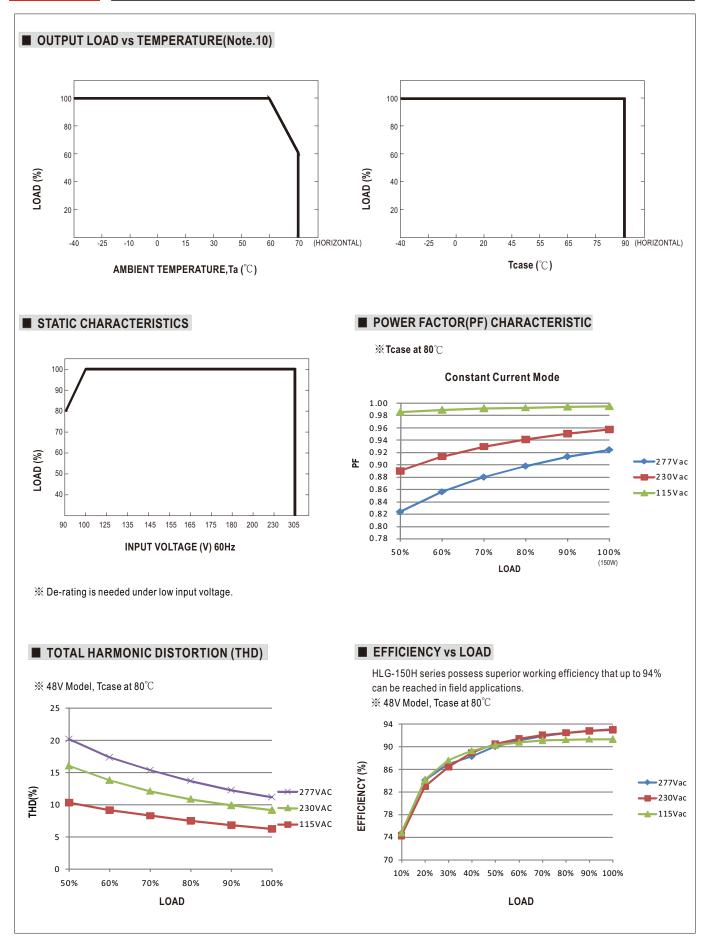





# ■ LIFE TIME

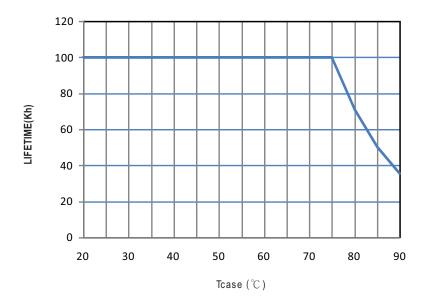



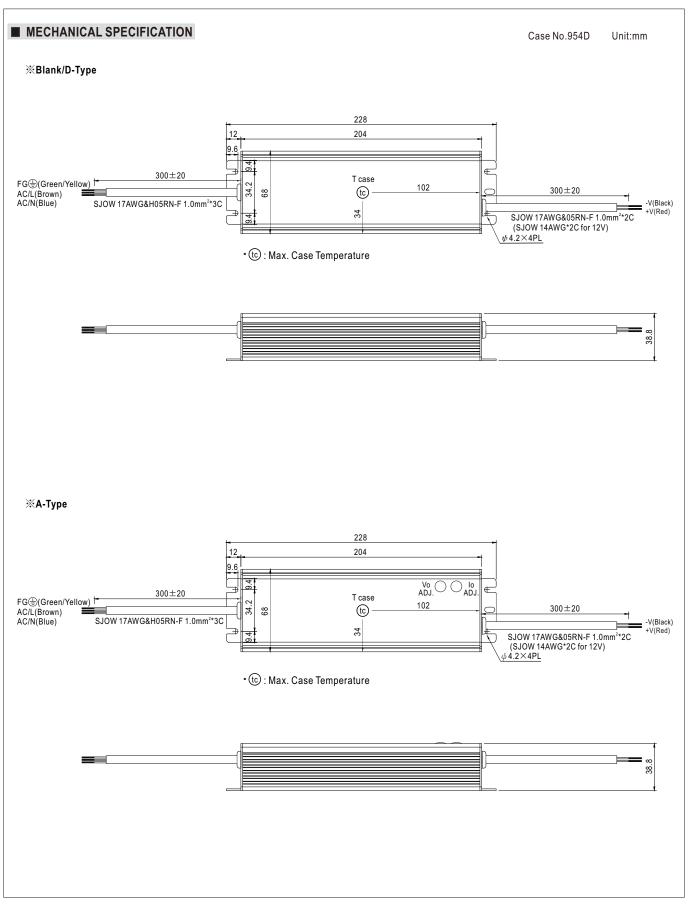



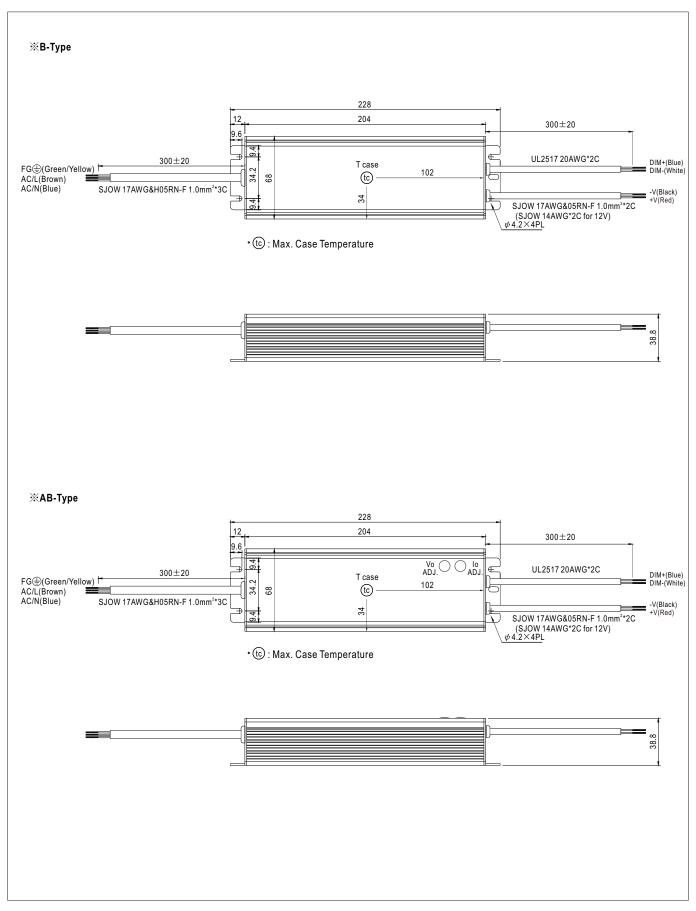




### ■ WATERPROOF CONNECTION


### Waterproof connector

 $Waterproof connector \ can be assembled \ on \ the \ output \ cable \ of \ HLG-150H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$ 




Size	Pin Configuration (Female)			
M12	000	000		
IVI I Z	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	(o)		
INITS	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		




### ※ Cable Joiner

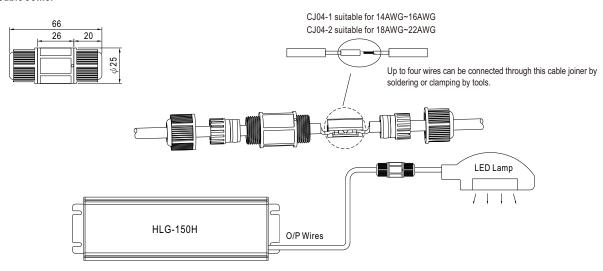

 $\bigcirc$  CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No. : CJ04-1, CJ04-2.

### % Junction Box Option

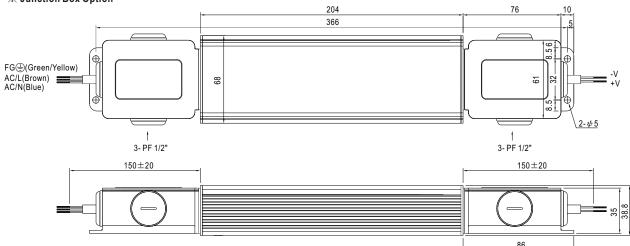

O Junction box option is available for A/Blank - Type. Please contact MEAW WELL for details.

### ■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html