







■ Features

- · Constant Current mode output
- · Plastic housing with Class II design
- Built-in active PFC function
- · Class 2 power unit
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- · LED panel lighting
- · LED downlight
- · LED decorative lighting
- · LED tunnel lighting
- · Moving sign

Description

LPF-60D series is a 60W AC/DC LED driver featuring the constant current output. LPF-60D operates from $90 \sim 305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for $-40\,^{\circ}\text{C} \sim +80\,^{\circ}\text{C}$ case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. LPF-60D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

■ Model Encoding

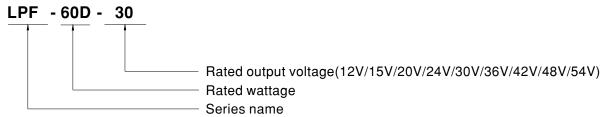

60W Constant Current Mode LED Driver

LPF-60D series

SPECIFICATION


MODEL		LPF-60D-12	LPF-60D-15	LPF-60D-20	LPF-60D-24	LPF-60D-30	LPF-60D-36	LPF-60D-42	LPF-60D-48	LPF-60D-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
ОИТРИТ	RATED CURRENT	5A	4A	3A	2.5A	2A	1.67A	1.43A	1.25A	1.12A
	RATED POWER Note.5	60W	60W	60W	60W	60W	60.12W	60.06W	60W	60.48W
	CONSTANT CURRENT REGION Note.2	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	CURRENT RIPPLE	5.0% max. @rated current								
	CURRENT TOLERANCE	±5.0%								
	SETUP, RISE TIME Note.6	1000ms, 80ms / 115VAC 500ms, 80ms / 230VAC								
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC								
INPUT	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR	PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
	EFFICIENCY (Typ.)	86%	87%	88%	89%	90%	90%	90%	90%	90%
	AC CURRENT	0.8A / 115VA	0.4A/2	230VAC 0	.32A/277VAC					
	INRUSH CURRENT(Typ.)	COLD START 55A(twidth=270µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	8 units (circuit breaker of type B) / 14 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT	<0.75mA/240VAC								
PROTECTION	OVER CURRENT	95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.								
	OVER VOLTAGE	15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 35V	34 ~ 40V	41 ~ 49V	46 ~ 54V	54 ~ 63V	59 ~ 66V
	OVER TEMPERATURE									
		Shut down o/p voltage, re-power on to recover								
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
	MAX. CASE TEMP.	Tcase=+80°C								
	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)								
SAFETY & EMC	SAFETY STANDARDS Note.8	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750, CSA C22.2 No. 250.0-08, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384, EAC TP TC 004, IP67, GB19510.1, GB19510.14 approved; design refer to UL60950-1								
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE									
	EMC EMISSION Note.8	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH Compliance to BS EN/EN55015,BS EN/EN61000-3-2 Class C (@load ≥ 60%); BS EN/EN61000-3-3, GB17743 and GB17625.1,EAC TP TC 020								
	EMC IMMUNITY	· ·								
	MTBF	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Line 2KV),EAC TP TC 020 1202.9K hrs min. Telcordia SR-332 (Bellcore); 396.7Khrs min. MIL-HDBK-217F (25°C)								
OTHERS	DIMENSION	162.5*43*32n		iia 311-332 (DEI	1001 <i>0</i>], 380.	rialio IIIII. I	MIL-11DDN-21/	1 (23 ()		
	PACKING		,	CUFT						
		0.45Kg; 32pcs/15.4Kg/0.93CUFT Ily mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.								
NOTE	2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed ur 6. Length of set up time is mea 7. The driver is considered as a complete installation, the fina 8. To fulfill requirements of the without permanently connec 9. This series meets the typical 10. Please refer to the warrant 11. The ambient temperature of 12. For any application note and	ETHODS OF at 20MHz of ballerance, line render low input asured at first can component that equipment in latest ErP registed to the main life expectance as statement on lerating of 3.5° did IP water products of the products of the main lerating of 3.5° did IP water products of the main lerating of 3.5° did IP wa	LED MODULE andwidth by us gulation and lo voltages. Plea sold start. Turn nat will be open anufacturers ulation for light ns. y of >50,000 l MEAN WELL C/1000m with	sing a 12" twist and regulation. se refer to "ST hing ON/OFF the rated in combination fixtures, this hours of operations is website at It fanless model	ed pair-wire ter ATIC CHARA ne driver may l ination with fina EMC Directive is LED driver of tion when Tca http://www.mea s and of 5°C/1	minated with a CTERISTIC" so lead to increase al equipment. See on the complean only be used see, particularly unwell.com	0.1uf & 47uf p ections for det e of the set up Since EMC pe lete installation ed behind a sv (c) point (or 1) models for op	arallel capacito ails. b time. rformance will a again. vitch TMP, per DLC) berating altitude	be affected by	C or less.

 $\hbox{$\times$ Product Liability Disclaimer: For detailed information, please refer to $https://www.meanwell.com/serviceDisclaimer.aspx}$$




■ BLOCK DIAGRAM

fosc: 100KHz

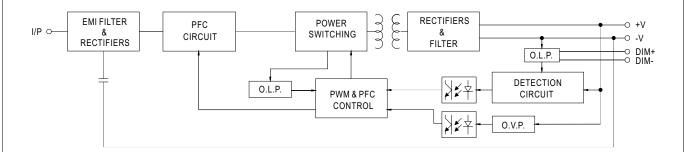

■ DRIVING METHODS OF LED MODULE

 $\ensuremath{\mathbb{X}}$ This series works in constant current mode to directly drive the LEDs.

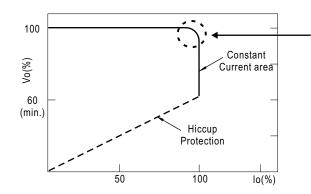

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

\divideontimes 3 in 1 dimming function




- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 1 ~ 10VDC

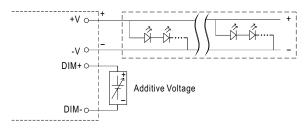


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

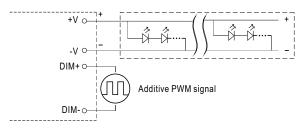



"DO NOT connect "DIM- to -V"


Applying additive resistance:

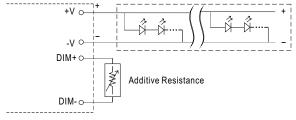

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

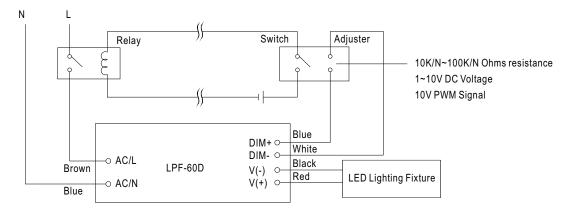


Using a switch and relay can turn ON/OFF the lighting fixture.



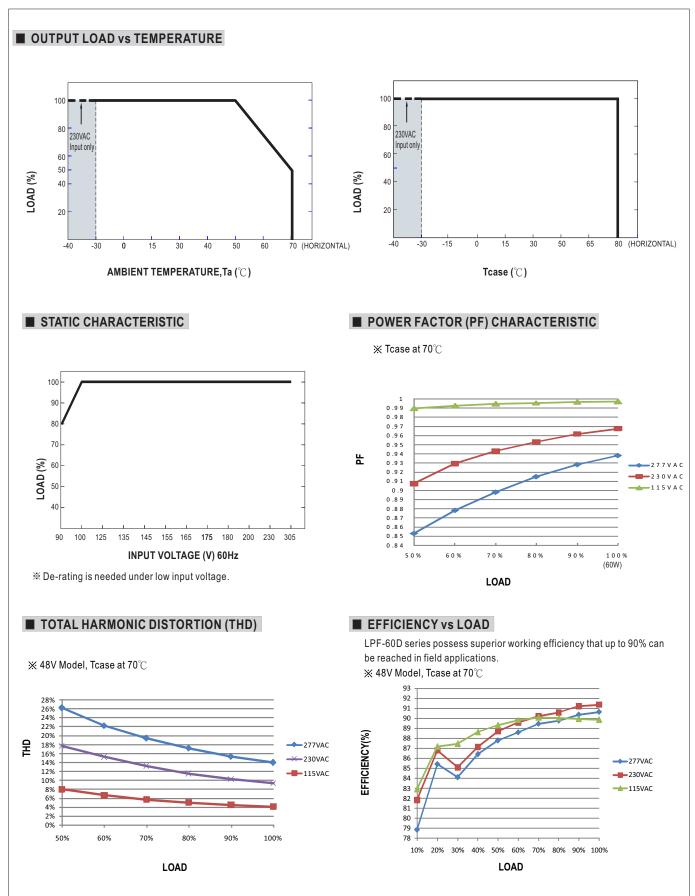



■ LIFE TIME

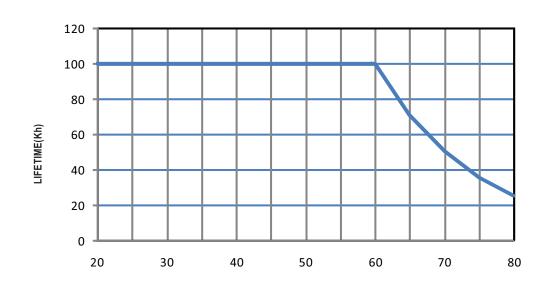


Tcase ($^{\circ}\!\mathbb{C}$)



■ MECHANICAL SPECIFICATION

CASE NO.: LPF-60B Unit:mm

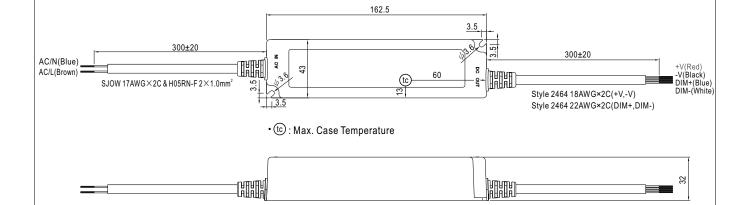

■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html