



## ■ Features :

- 4"×2" miniature size
- Universal AC input / Full range
- $^{\bullet}$  Low leakage current <100  $\mu A$
- \* Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Medical safety approved (2 x MOPP between primary to secondary)
- UL60950-1/IEC60950-1/EN60950-1 ITE safety approved
- No load power consumption<0.75W
- Fixed switch frequency at 100KHz
- Suitable for BF application with appropriate system consideration
- 3 years warranty











## **SPECIFICATION**


MODEL		RPS-60-3.3	RPS-60-5	RPS-60-12	RPS-60-15	RPS-60-24	RPS-60-48	
	DC VOLTAGE	3.3V	5V	12V	15V	24V	48V	
	RATED CURRENT	10A	10A	5A	4A	2.5A	1.25A	
	CURRENT RANGE	0 ~ 11A	0 ~ 11A	0 ~ 5.5A	0 ~ 4.4A	0 ~ 2.75A	0 ~ 1.375A	
	RATED POWER	33W	50W	60W	60W	60W	60W	
	PEAK LOAD(10sec.) Note.4	36.3W	55W	66W	66W	66W	66W	
	RIPPLE & NOISE (max.) Note.2	80mVp-p	80mVp-p	120mVp-p	150mVp-p	240mVp-p	300mVp-p	
OUTPUT	VOLTAGE ADJ. RANGE	3.1 ~ 3.6V	4.75 ~ 5.5V	11.4 ~ 13.2V	13.5 ~ 16.5V	22.8 ~ 27.6V	45.6 ~ 52.8V	
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±2.0%	±2.0%	±1.0%	±1.0%	
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	SETUP, RISE TIME	500ms, 30ms/230VAC 500ms, 30ms/115VAC at full load						
	HOLD UP TIME (Typ.)	50ms/230VAC 12ms/115VAC at full load						
	VOLTAGE RANGE	90 ~ 264VAC 127 ~ 370VDC						
	FREQUENCY RANGE	47 ~ 63Hz						
INDUT	EFFICIENCY (Typ.)	74%	79%	83%	84%	85%	86%	
NPUT	AC CURRENT (Typ.)	1.8A/115VAC	1 A/230VAC					
	INRUSH CURRENT (Typ.)	COLD START 60A/230VAC 30A/115VAC						
	LEAKAGE CURRENT Note.8	Earth leakage current < 150 μA/264VAC , Touch current < 100 μA/264VAC						
		115 ~ 150% rated output power  Protection type: Hiccup mode, recovers automatically after fault condition is removed						
	OVER LOAD							
ROTECTION		3.8 ~ 5V	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.4 ~ 32.4V	55.2 ~ 64.8V	
	OVER VOLTAGE	1 1 1			17.20 20.201	20.1 02.11	00.2 01.01	
	WORKING TEMP.	Protection type: Shut down o/p voltage, re-power on to recover  -20 ~ +70°C (Refer to "Derating Curve")						
	WORKING HUMIDITY	20 ~ 90% RH non-condensing						
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH						
LINVINCINIENT	TEMP. COEFFICIENT	±0.03% <sup>C</sup> (0~45°C)						
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes						
	SAFETY STANDARDS	UL60950-1, TUV EN60950-1, ANSI/AAMI ES60601-1, TUV EN60601-1, IEC60601-1 approved						
SAFETY &	ISOLATION LEVEL	Primary-Secondary: 2xMOPP, Primary-Earth:1xMOPP, Secondary-Earth:1xMOPP						
SAFEIT & EMC	WITHSTAND VOLTAGE	I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC						
(Note 5)	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC/ 25°C/ 70% RH						
,	EMC EMISSION	Compliance to EN55011 (CISPR11), EN55022 (CISPR22) Class B, EN61000-3-2,-3						
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, EN61204-3, medical level, criteria A						
	MTBF	353.6K hrs min. MIL-HDBK-217F (25°C)						
OTHERS	DIMENSION	101.6*50.8*29mm (L	,	1				
OTTLENO	PACKING	0.15Kg; 96pcs/15.4K						
NOTE	Ripple & noise are measure     Tolerance : includes set up     33% Duty cycle maximum v     The power supply is consid a 360mm*360mm metal plaperform these EMC tests, p     Length of set up time is me     Heat Sink HS1,HS2 can no	ters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  oise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  includes set up tolerance, line regulation and load regulation.  cycle maximum within every 30 seconds. Average output power should not exceed the rated power.  supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on 360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to ese EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.  HS1,HS2 can not be shorted.  ent was measured from primary input to DC output.						







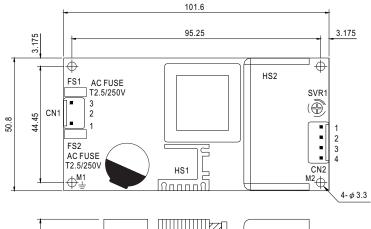



AC Input Connector (CN1): JST B3P-VH or equivalent

Pin No.	No. Assignment Mating Housing		Terminal	
1	AC/N	JST VHR or equivalent	10T 0\/LL 04T D4 4	
2	No Pin		JST SVH-21T-P1.1 or equivalent	
3	AC/L	or oquivaloni	or oquivalont	

DC Output Connector (CN2): JST B4P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1,2	+V	JST VHR	JST SVH-21T-P1.1
3,4	-V	or equivalent	or equivalent


±: Grounding Required



1.HS1,HS2 cannot be shorted.

2.M1 is safety ground. For better EMC performance, Please secure an electrical connection between M1,M2 and chassis grounding.

fosc: 100KHz

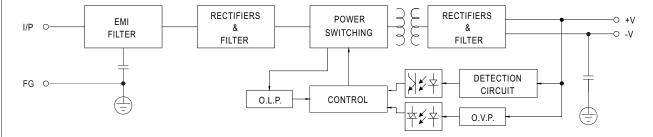

## ■ Output Derating

■ Block Diagram

## ■ Output Derating VS Input Voltage

