

DESCRIPTIONS

1W, DC/DC Converter



CE Report
EN62368-1

RoHS
UK
CA Report
BS EN62368-1



FEATURES

- Ultra compact DIP/SMD package
- Wide 2:1 input voltage range
- Operating ambient temperature range: -40°C to +85°C
- I/O isolation test voltage: 1.5K VDC
- Short circuit protection (continuous)
- Industry standard pin-out

APPLICATIONS

- Communication
- Instruments
- Industrial electronics

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Ripple & Noise ^② (mVp-p) Typ./Max.	Full Load Efficiency (%) Min./Typ.	Capacitive Load (μF)Max.
		Nominal (Range)	Max. ^①	Voltage (VDC)	Current (mA) Max./Min.			
EN/BS EN	DEST/DESD1-B1203	12 (9-18)	20	3.3	303/15	100/150	73/75	2700
	DEST/DESD1-B1205			5	200/10		75/77	2200
	DEST/DESD1-B1212			12	83/4		77/79	1000
	DEST/DESD1-B1215			15	67/3		78/80	680
	DEST/DESD1-B1224			24	42/2		74/76	470
	DEST/DESD1-B2403	24 (18-36)	40	3.3	303/15	50/100	73/75	2700
	DEST/DESD1-B2405			5	200/10		75/77	2200
	DEST/DESD1-B2412			12	83/4		76/78	1000
	DEST/DESD1-B2415			15	67/3		76/78	680
	DEST/DESD1-B2424			24	42/2		75/77	470

Notes: ①Exceeding the maximum input voltage may cause permanent damage;

②Ripple & noise testing condition at nominal input voltage and 5%-100% load, the "tip and barrel" method is used for ripple and noise test.

Specifications

Product Specifications	Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Specifications	Input Current (full load/no-load)	12VDC input voltage	--	111/15	114/30	mA
		24VDC input voltage	--	55/6	57/10	
	Reflected Ripple Current	12VDC input voltage	--	40	--	
		24VDC input voltage	--	55	--	
	Surge Voltage (1sec. max.)	12VDC input voltage	-0.7	--	25	VDC
		24VDC input voltage	-0.7	--	50	

	Start-up Voltage	12VDC input voltage		--	--	9	
		24VDC input voltage		--	--	18	
	Input Filter			Capacitance filter			
	Hot Plug			Unavailable			
Output Specifications	Voltage Accuracy	5%-100% load, input voltage range		--	±1	±3	%
	No-load Output Voltage Accuracy	Input voltage range	3.3VDC output	--	±5	±7	
			Others	--	±1.5	±5	
	Linear Regulation	Input voltage variation from low to high at full load		--	±0.2	±0.5	
	Load Regulation	5%-100% load		--	±0.5	±1	%
	Transient Recovery Time	25% load step change		--	1	3	ms
	Transient Response Deviation			--	±2.5	±5	%
	Temperature Coefficient	Full load		--	--	±0.03	%/°C
Short-circuit Protection			Continuous, self-recovery				
General Specifications	Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.		1500	--	--	VDC
	Insulation Resistance	Input-output insulation at 500VDC		1000	--	--	MΩ
	Isolation Capacitance	Input-output capacitance at 100KHz/0.1V		--	100	--	pF
	Operating Temperature	See Fig. 1		-40	--	+85	°C
	Storage Temperature			-55	--	+125	°C
	Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds		--	--	+300	
	Reflow Soldering Temperature			Peak temperature ≤245°C, duration ≤60s max. over 217°C. see also IPC/JEDEC J-STD-020D.1.			
	Storage Humidity	Non-condensing		--	--	95	%RH
	Switching Frequency (PFM Mode)	Full load, nominal input voltage		--	300	--	KHz
	MTBF	MIL-HDBK-217F@25°C		1000	--	--	K hours
Mechanical Specifications	Case Material	Black flame-retardant and heat-resistant plastic					
	Dimension	DESD1-Bxxxx		14.00 × 14.00 × 9.00 mm			
		DEST1-Bxxxx		15.00 × 14.00 × 9.10 mm			
	Weight	2.2g(Typ.)					
	Cooling Method	Free air convection					

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B (see Fig. 3-② for recommended circuit)					
	RE	CISPR32/EN55032 CLASS B (see Fig. 3-② for recommended circuit)					
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV	perf. Criteria B			
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A			
	EFT	IEC/EN61000-4-4	±2KV (see Fig. 3-① for recommended circuit)	perf. Criteria B			
	Surge	IEC/EN61000-4-5	line to line ±2KV (see Fig. 3-① for recommended circuit)	perf. Criteria B			
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A			

Characteristic Curve



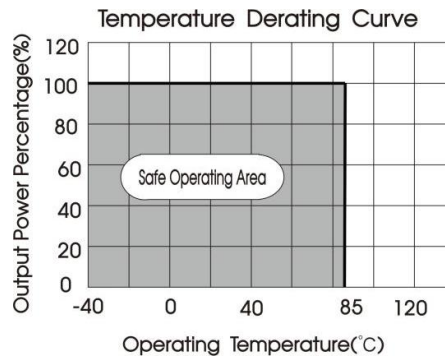


Fig. 1


DESD1-B1224

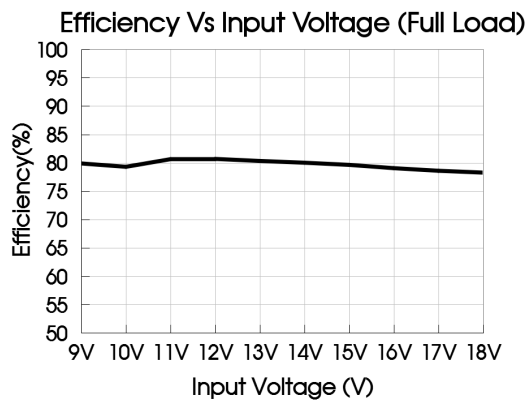


DESD1-B1224

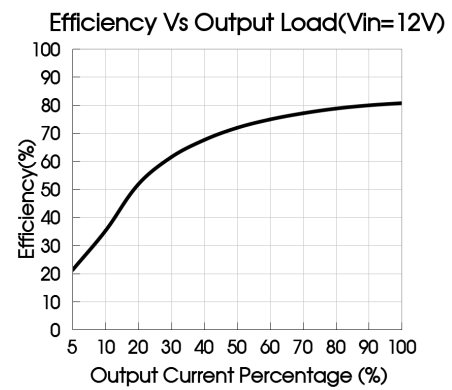

DESD1-B2405

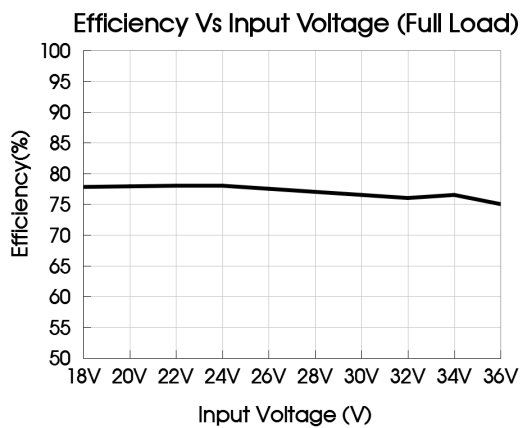

DESD1-B2405

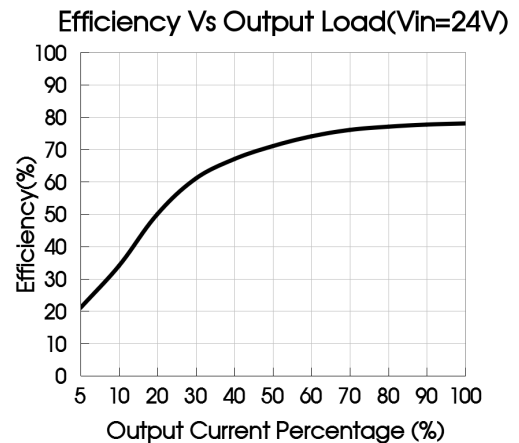

Design Reference

1. Recommended circuit

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} , connecting a "Y" capacitor between input "GND" and output "0V", and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the max. capacitive load value of the product.



Fig.2

Vin(VDC)	12	24
Cin	47uF/25V	47uF/50V

Vo(VDC)	3.3, 5	12, 15, 24
Cout	100uF/6.3V	27uF/35V

2. EMC compliance circuit

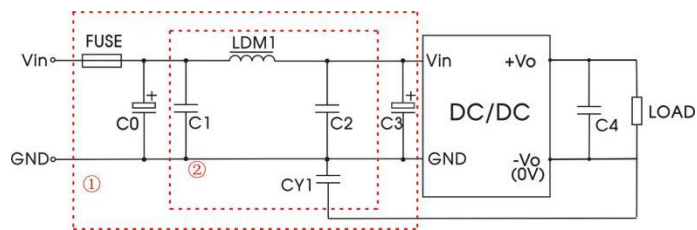


Fig.3

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.

Parameter description:

Part No.	Vin:12VDC	Vin:24VDC
FUSE	slow blow, choose according to actual input current	
C0	1000μF/25V	680μF/50V
C1	4.7μF/50V	
LDM1	15μH	
C2	4.7μF/50V	
C3	330μF/50V	
CY1	1nF/2KV	
C4	Refer to the Cout Fig.2	

3. Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module(see Fig. 4).

Generally: Vin=12V series Iave =205mA
Vin=24V series Iave =104mA

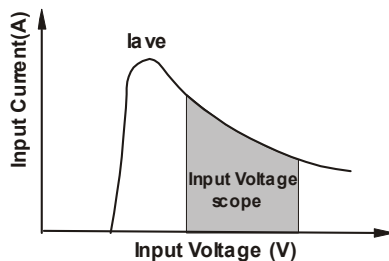




Fig. 4

4. Output load requirements

When using, the minimum load of the module output should not be less than 5% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 5% dummy load in parallel at the output end, the dummy load is generally a resistor, please note that the resistor needs to be used in derating.

DESD1-Bxxxx Dimensions and Recommended

THIRD ANGLE PROJECTION 

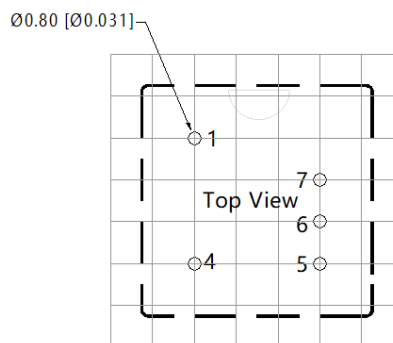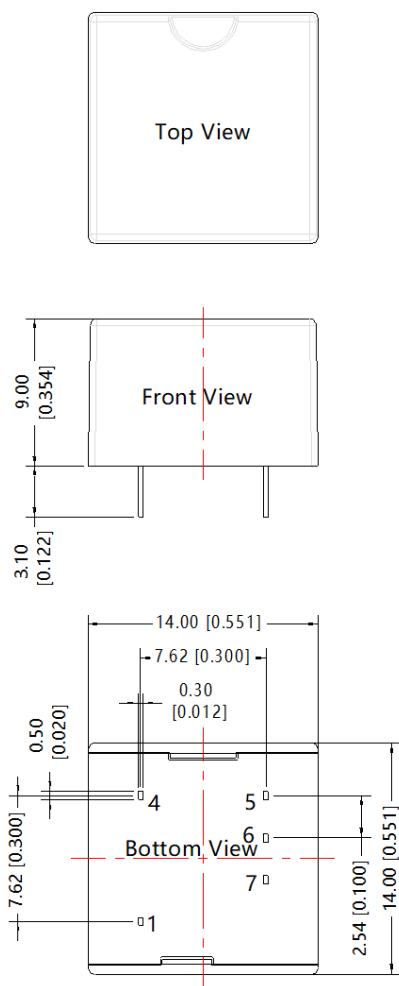




Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Function
1	GND
4	Vin
5	+Vo
6	NC
7	0V

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

DEST1-Bxxxx Dimensions and Recommended

THIRD ANGLE PROJECTION 

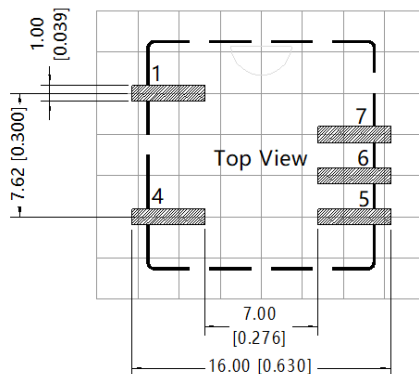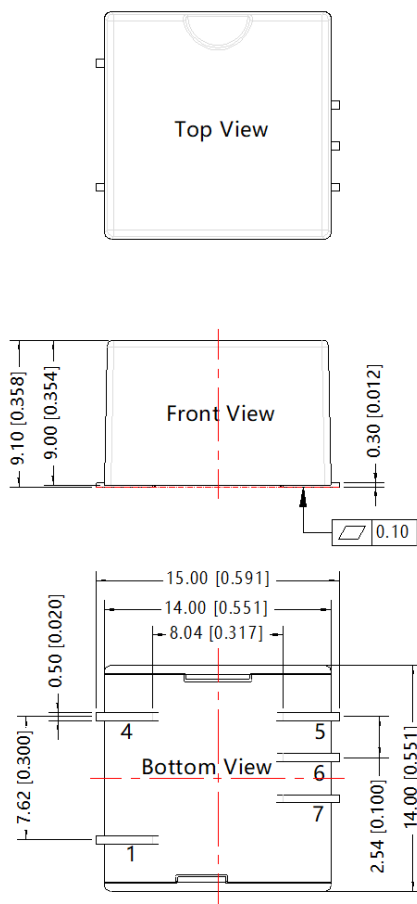

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Function
1	GND
4	Vin
5	+Vo
6	NC
7	0V

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

Notes:

1. Recommend to use module with more than 5% load, if not, the ripple of the product may exceeds the specification, but does not affect the reliability of the product;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, data in this datasheet should be tested under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.